

MASSIMOTTO ANA78S.2 M12


CODED NON-CONTACT SAFETY SWITCH FOR THE CONTROL OF MACHINE GUARDS

- Acotom®2 decoding process
- Power supply: 24Vac/dc -15%/+10% or T11/T21 of AWAX
- Switching distance/hysteresis : 8 /3 mm
- Safety contacts: 2 NO 24Vdc/500mA
- Auxiliary contact: 1 PNP NC 24Vac/dc /250mA
- Protection class IP67
- Temperature -20°C / +60°C
- Response time: 500µs


SAFETY CATEGORY

MASSIMOTTO ANA78S.2 M12 : EN60947-5-3
 MASSIMOTTO ANA78S.2 M12 sur Awax : cat. 4
 MASSIMOTTO ANA78S.2 M12 in series with Awax : cat.3

WIRING DIAGRAM

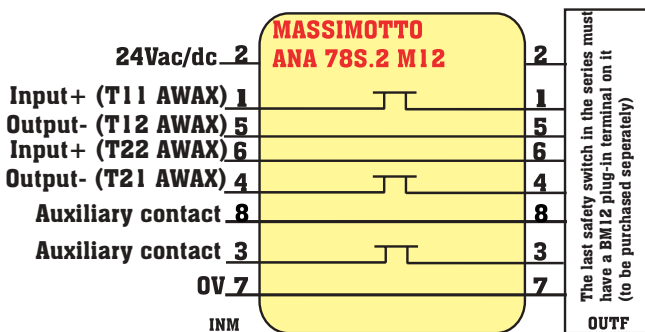

DIMENSIONS

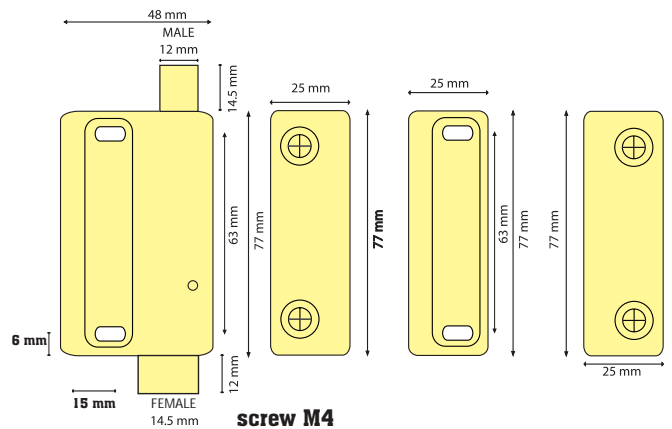


PIN DETAILS

Male input connector:

- 1 white T11
- 2 brown 24V
- 3 green AUX
- 4 yellow T21
- 5 grey T12
- 6 pink T22
- 7 blue 0V
- 8 red AUX

INM



Female output connector :

- 1 white OUT+
- 2 brown 24V
- 3 green AUX+
- 4 yellow OUT-
- 5 grey link+
- 6 pink link-
- 7 blue 0V
- 8 red link AUX

ADVICE

An ideal and economical solution for wiring in series on machine with more than 4 doors