

Modulate Action

Safety Relief Valves

Series 433

Series 429



CATALOG

LESER

The-Safety-Valve.com

LESER Safety Valves for every industrial application



Modulate Action



**High
Performance**

Series 433

Type 431, 433



**Compact
Performance**

Type 431, 433 PN 160



API




**High
Efficiency**



**Clean
Service**



**Critical
Service**




**Best
Availability**

Series 429


Type 427, 429

General

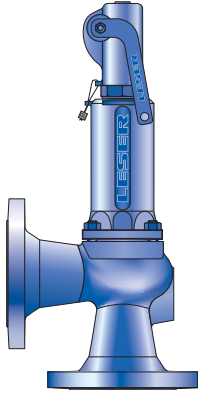


Type 431, 433

DN 15 – DN 150
Set pressure 0.2 – 40 bar

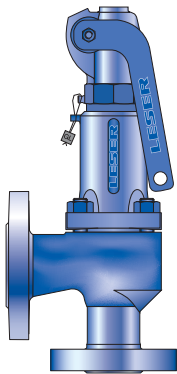


Type 431, 433 PN 160

DN 15
Set pressure 0.3 – 160 bar

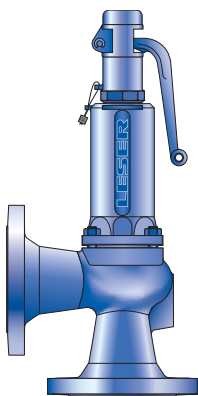

Type 427, 429

DN 15 – DN 150
Set pressure 1.5 – 40 bar



Options

Overview Chapter/Page


| General | |
|--|-------|
| General Information | 00/01 |
| Applications, General design features | 00/02 |
| Valve guide | 00/03 |
| Valve selection | 00/05 |
| How to use: Signs and symbols, Flange drillings and facings | 00/07 |
| How to use: Determination of coefficient of discharge K_{dr}/α_w | 00/08 |
| How to use: Capacity sheets | 00/09 |
| LESER Effective Orifice $LEO_{S/G}$ | 00/11 |
| LESER Effective Orifice LEO_L | 00/12 |
| Sour gas service | 00/13 |

LESER Type Chapter/Page


| Type 431, 433 | | 01/01 |
|---|--------------|-------|
| Materials | | |
| • Conventional construction | | 01/02 |
| • Balanced bellows construction | | 01/04 |
| How to order: | | |
| • Numbering system | | 01/06 |
| • Article numbers | | 01/08 |
| Pressure temperature ratings | | |
| • Metric units | | 01/10 |
| Dimensions and weights | | |
| • Metric units | | 01/12 |
| Approvals | | 01/13 |
| Flange drillings | | 01/14 |
| Flange facings | | 01/15 |
| Order information - spare parts | | 01/16 |
| Available options | | 01/18 |
| Capacities | | |
| • Steam | Metric units | 01/19 |
| • Air | Metric units | 01/20 |
| • Water | Metric units | 01/21 |
| Determination of coefficient of discharge K_{dr}/α_w | | 01/22 |

LESER Type Chapter/Page


| Type 433 PN 160 | | 02/01 |
|---|--------------|-------|
| Materials | | |
| • Conventional design | | 02/02 |
| • Balanced bellows design | | 02/04 |
| How to order: | | |
| • Numbering system | | 02/06 |
| • Article numbers | | 02/08 |
| Pressure temperature ratings | | |
| • Metric units | | 02/09 |
| Dimensions and weights | | |
| • Metric units | | 02/10 |
| Flange drillings and facings | | 02/11 |
| Order information - spare parts | | 02/12 |
| Available options | | 02/13 |
| Approvals | | 02/14 |
| Capacities | | |
| • Steam, air, water | Metric units | 02/15 |
| Determination of coefficient of discharge K_{dr}/α_w | | 02/16 |

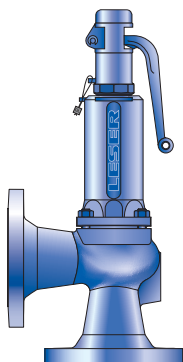


Type 433
Plain lever H3
Closed bonnet
Conventional design

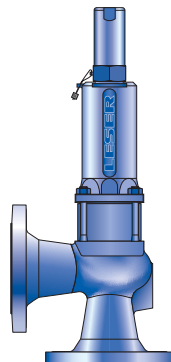

Type 433
Cap H2
Closed bonnet
Balanced bellows design




Type 431
Plain lever H3
Open bonnet
Conventional design

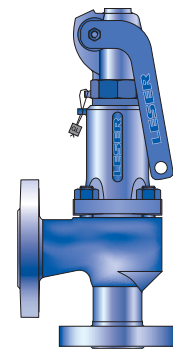


Type 433 PN 160
Packed lever H4
Closed bonnet
Conventional design

| LESER Type | Chapter/Page | |
|-------------------------------------|--------------|-------|
| Type 427, 429 | 03/01 | |
| Materials | | |
| • Conventional design | 03/02 | |
| • Balanced bellows design | 03/04 | |
| How to order: | | |
| • Numbering system | 03/06 | |
| • Article numbers | 03/08 | |
| Pressure temperature ratings | | |
| • Metric units | 03/10 | |
| Dimensions and weights | | |
| • Metric units | 03/12 | |
| Flange drillings and facings | 03/13 | |
| Order information - spare parts | 03/14 | |
| Available options | 03/16 | |
| Approvals | 03/17 | |
| Capacities | | |
| • Steam | Metric units | 03/18 |
| • Air | Metric units | 03/19 |
| • Water | Metric units | 03/20 |


| Options | Chapter/Page |
|-------------------|--------------|
| Overview | 99/02 |
| Caps and lever | 99/04 |
| Metal seat | 99/06 |
| Soft seal disc | 99/08 |
| Soft seal | 99/10 |
| Disc | 99/11 |
| Balanced bellows | 99/12 |
| Heating jacket | 99/14 |
| O-ring damper | 99/16 |
| Elastomer bellows | 99/18 |
| Lift indicator | 99/19 |
| Lift restriction | 99/20 |

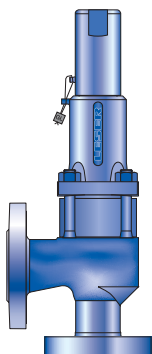


Type 433 PN 160
Cap H2
Closed bonnet
Balanced bellows design

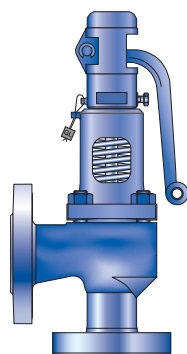

Type 431 PN 160
Plain lever H3
Open bonnet
Conventional design

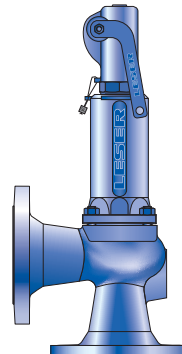

Type 429
Packed lever H4
Closed bonnet
Conventional design

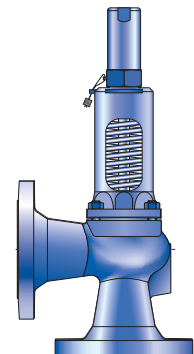

Type 427
Cap H2
Open bonnet
Conventional design



LESER – Modulate Action Safety Valves

The Modulate Action product group stands for

- ✓ Suitable solutions for all areas of applications, especially thermal expansion
- ✓ Lowest possible loss of medium
- ✓ Compact construction and low weight

LESER Modulate Action Safety Valves

- are characterised by longstanding proof in service and are constantly optimised by service specialists.
- are available as standard safety valves or proportional safety valves.
- reach their full lift within a pressure increase of 10% above the set pressure
- are suitable for almost all industrial applications.
- are accepted by numerous rules and regulations and approved by leading classification societies.

Examples of this are:

- **European Community:** CE marking as per Pressure Equipment Directives 97/23/EG and DIN EN ISO 4126-1
- **Germany:** VdTÜV approval as per Pressure Equipment Directive, EN ISO 4126-1, TÜV SV 100 and AD 2000-Merkblatt A2
- **China:** AQSIQ based on the approvals as per AD 2000-Merkblatt A2
- **Russia:** TR and RTN based on the AD 2000-Merkblatt A2 approval

Furthermore, all LESER Modulate Action safety valves are constructed, identified, produced, and approved in compliance with the following regulations:

EN ISO 4126-7, EN 12266-1/-2, EN 1092 Part I and II Flange, ASME B 16.34 and ASME B16.5- Flange, AD 2000-Merkblatt A4, AD 2000-Merkblatt HP0, TRD 110, TRD 421, TRD 721

LESER Modulate Action safety valves can be used for all steam, gas, and liquid applications and are characterised by their low loss of medium.

The Series 433 standard safety relief valves have component testing according to AD 2000-Merkblatt AT for steam, gases, and liquids. For the Series 429 proportional safety valves, there is only component testing as per AD 2000-Merkblatt A2 for steam and gasses, because the required coefficient of discharge is not reached for liquids. Nevertheless, Series 429 can be used as per the rules and regulations for thermal expansion.

Furthermore, Series 429 proportional safety valves are used as overflow valves or in bypass systems.



Applications

LESER – Modulate Action Safety Valves

provide the ultimate solution for all industrial applications with steam, gasses, and liquids.

Series 433 standard safety valves

acc. to definition AD 2000-Merkblatt A2

are ideal relief valves for medium mass flows. Their greater proportional range leads to a constant mode of operation and relief of pressure peaks for liquids in particular.

Typical applications for LESER Modulate Action Series 433 safety valves are:

- chemical industry
 - recycling facilities: Low medium loss
 - piping with long line lengths
 - two-phase flow
 - waste gas purification systems on the outlet side
- heat-transfer oil systems
- liquids protection
 - metering pumps
 - hydraulic systems
 - pulsating operating pressures
- machine building (OEM)
 - piston compressors with small and medium capacities
- overflow function
- thermal expansion
 - protection of pipeline segments
 - sealed storage tanks

Series 429 proportional safety valves

acc. to definition AD 2000-Merkblatt A2

opens proportional to pressure increase. This is usually achieved by using a disc without a lifting aid. Proportional safety valves are normally used anywhere where only very small mass flows are to be expected and the medium loss is to be kept as low as possible (e. g. thermal expansion).

Both proportional as well as standard safety valves are characterised by particularly stable operation.

General design feature

LESER – Modulate Action Safety Valves


offer a large number of models, materials, and accessories for adaptation to any application:

- 11 valve sizes from DN 15 to DN 150 – 1/2" up to 6" with connection possibilities for the respective application
- Nominal pressure ratings from PN 16 to PN 160 / Class 150 to Class 600 fulfil most pressure requirements
- Orifice $0.2 \times D$ to $> 1.1 \times M$ cover all common performance requirements.
- The required material for the application can be chosen from the large choice of body materials, for example:
 - 0.6025 / cast iron (Series 433)
 - 0.7043 / ductile iron
 - 1.0619 / WCB
 - 1.4408 / CF8M
- centre to face dimensions acc. to DIN 3320
- set pressures from 0.2 to 160 bar qualify Modulate Action safety valves for all industrial systems
- operating temperatures from -270 to 450 °C make use possible in numerous applications
- compact construction and low weight for easy handling
- same nominal inlet and outlet diameter
- identical construction for steam, gasses and liquids (single trim) reduces the number of required spare parts and facilitates cost-effective maintenance
- construction without a blow down ring guarantees easy service and prevents incorrect settings of the blow down ring
- the one-part spindle reduces friction, guarantees optimal guidance and reliable operation under all operating conditions
- the self-emptying angle type body prevents residue and reduces corrosion


LESER – Modulate Action safety valves can be individually adapted to the applications with a multitude of accessories. Examples are:

- discs with soft seal (O-ring) fulfil increased demands of functional tightness
- stellited or hardened metal seat surfaces of disc and seat reduce the wear and increase the service life
- balanced bellows for compensation of the back pressure and to protect the moving parts
- heating jacket for heating the safety valve when protecting cold stiff media
- each component can be constructed of an alternative material according to customer specifications

How to find the right Product Group


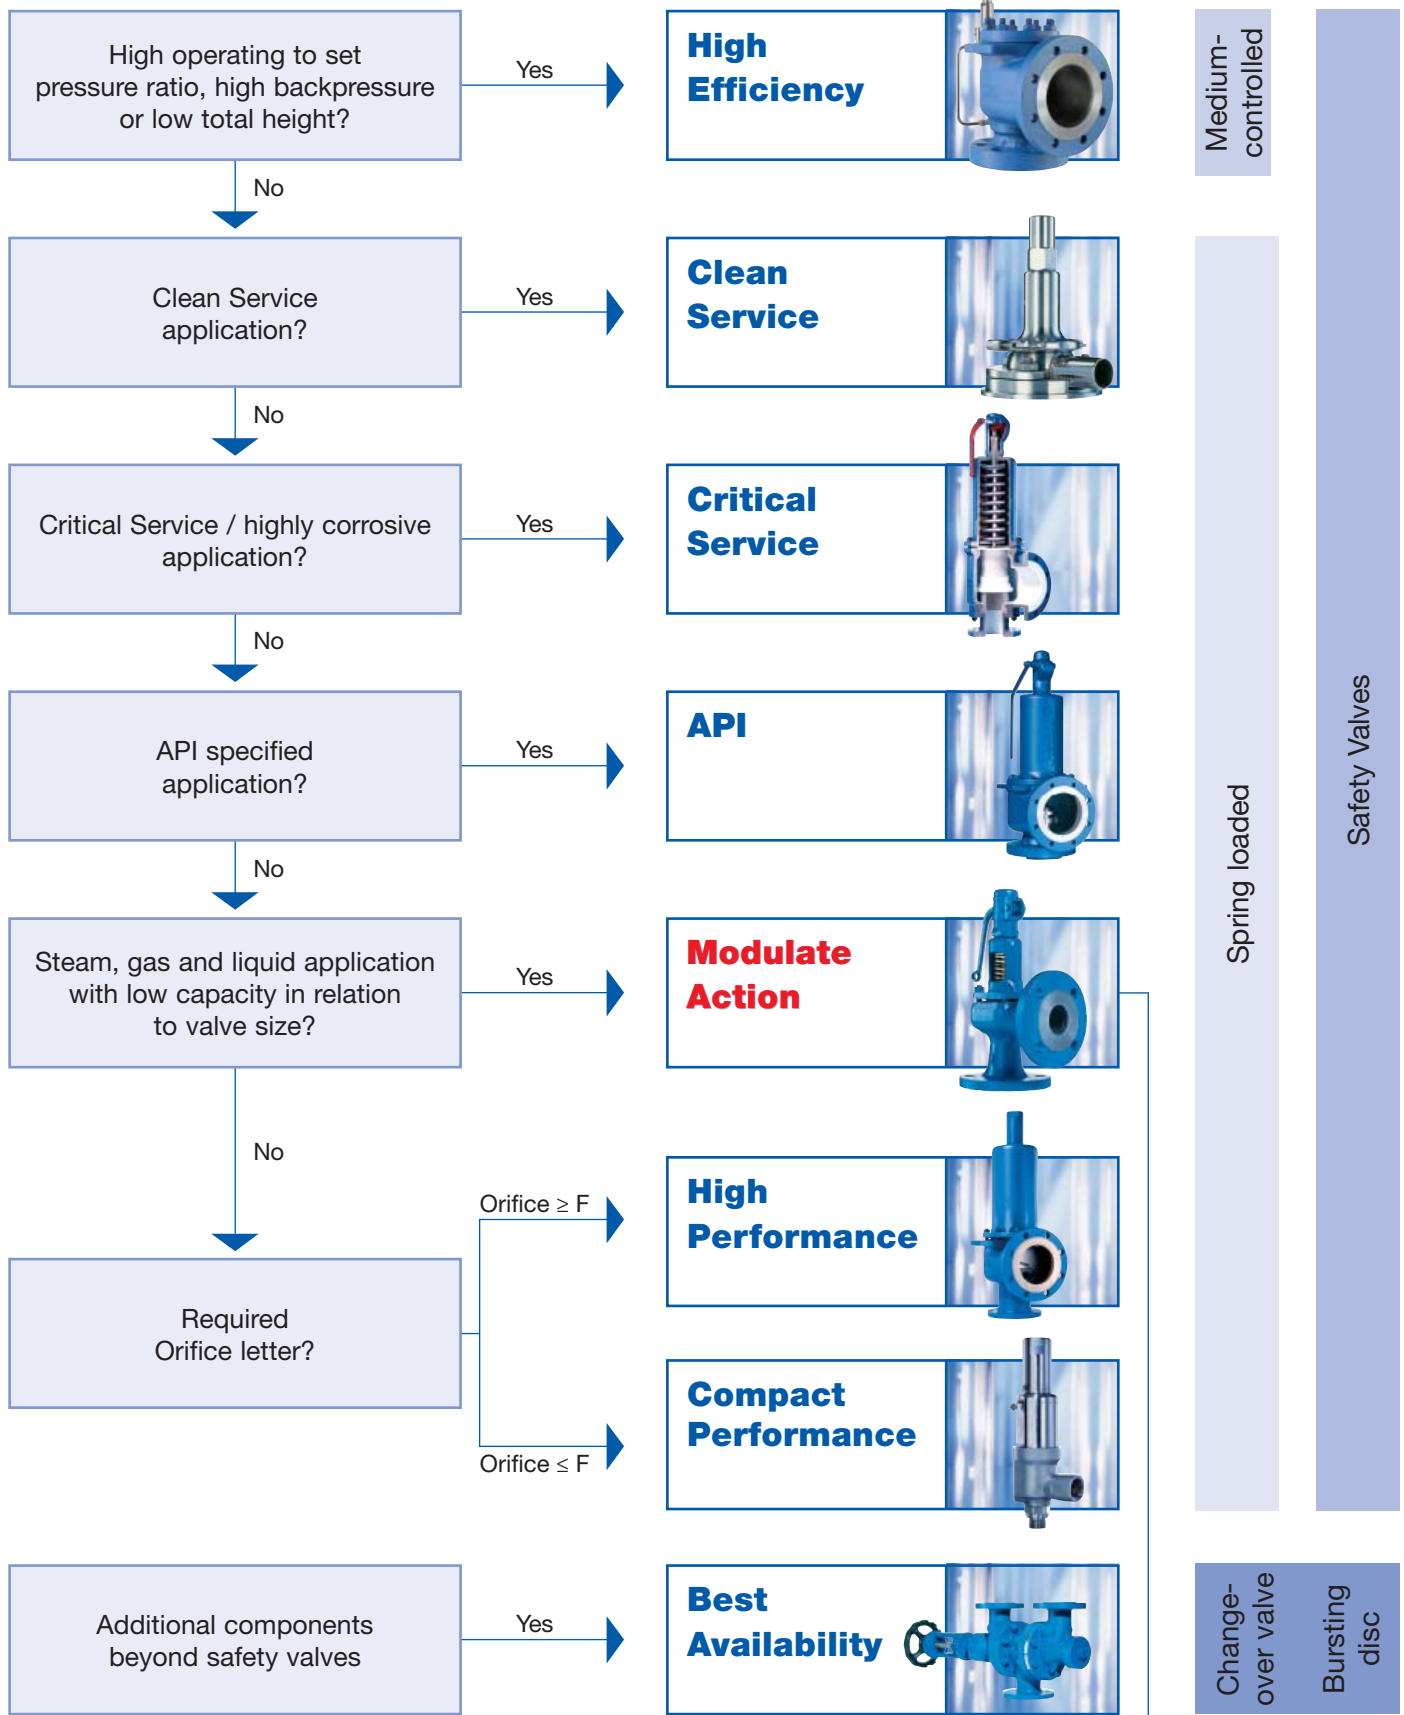


How to find the right Modulate Action Safety Valve

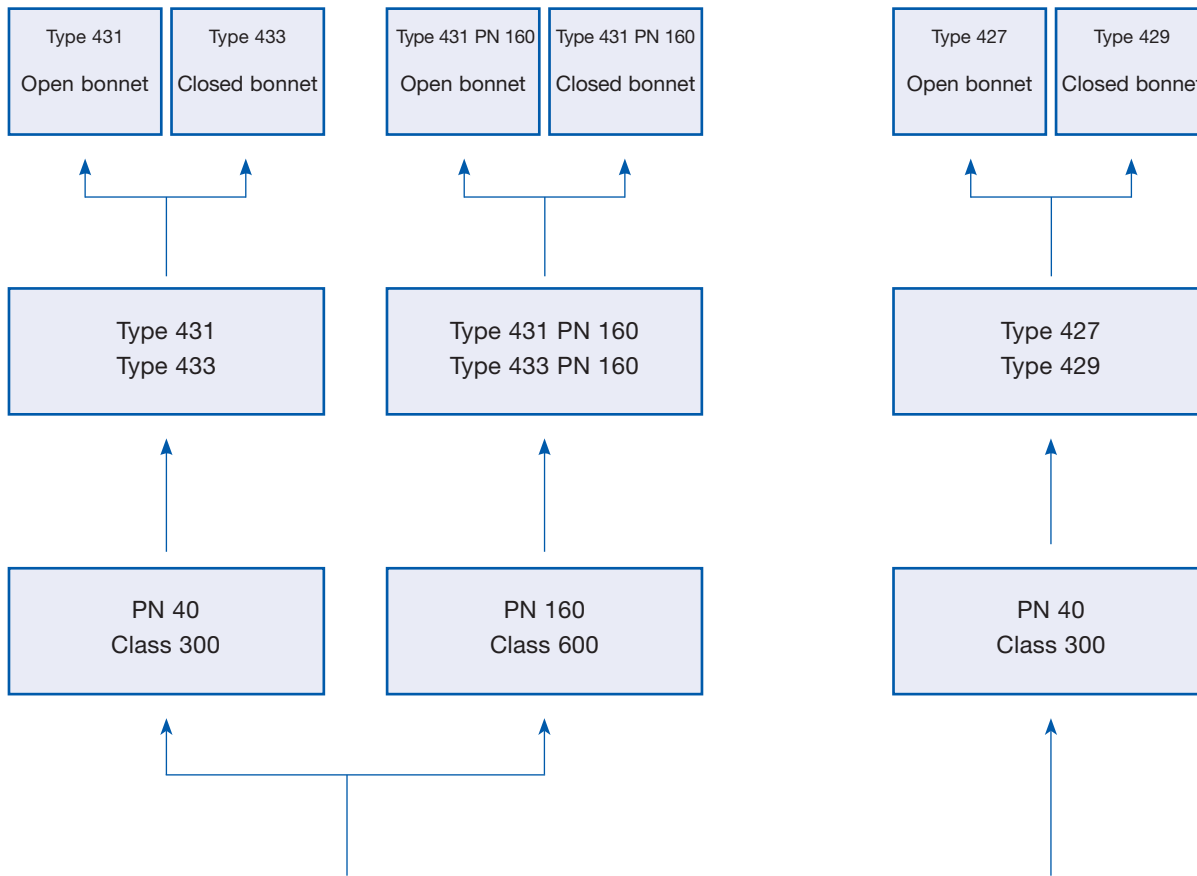


Standard Safety Valve
 acc. to definition AD 2000-Merkblatt A2
 for medium capacities with a large proportional range
 Mainly used for thermal expansion.

Proportional Safety Valve
 acc. to definition AD 2000-Merkblatt A2
 with linear opening and closing characteristics
 proportional to increasing or falling pressure
 Mainly used with incompressible media

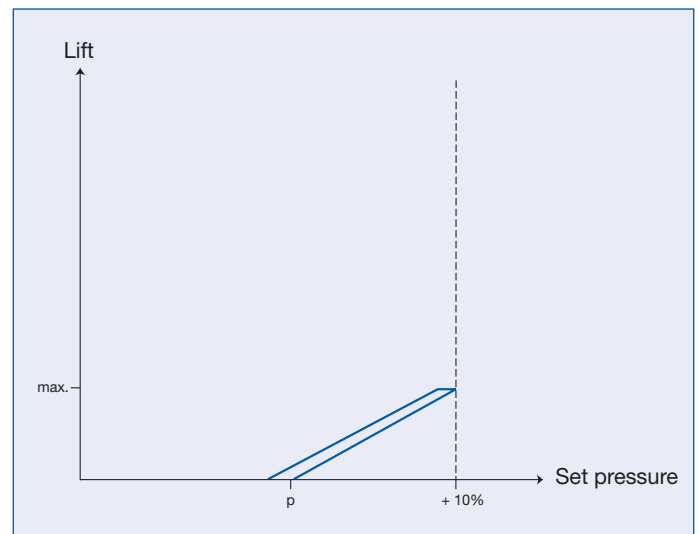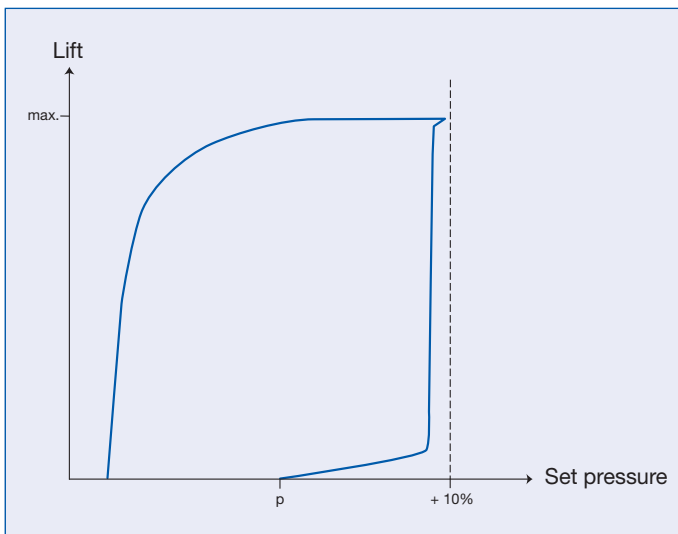

How to find the right Modulate Action Safety Valve

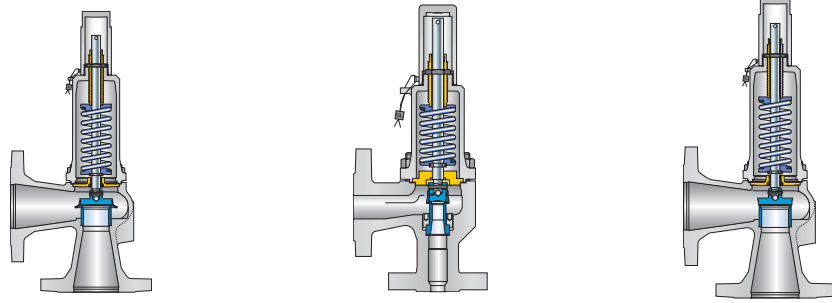


| Valve size | | 431 / 433 | 433 PN 160 | 427 / 429 |
|------------|--|-----------|------------|-----------|
| Type | | 431 / 433 | 433 PN 160 | 427 / 429 |
| min. | | DN 15 | DN 15 | DN 15 |
| | | 1/2" | 1/2" | 1/2" |
| max. | | DN 150 | DN 15 | DN 150 |
| | | 6" | 1/2" | 6" |

| Materials | | 431 / 433 | 433 PN 160 | 427 / 429 |
|-----------|------------------|-----------|------------|-----------|
| Type | | 431 / 433 | 433 PN 160 | 427 / 429 |
| 0.6025 | Cast iron | ✓ | - | - |
| 0.7043 | Ductile 60-40-18 | ✓ | - | ✓ |
| 1.0619 | WCB | ✓ | ✓ | ✓ |
| 1.4408 | CF8M | ✓ | ✓ | ✓ |

| Set pressure | | 431 / 433 | 433 PN 160 | 427 / 429 |
|-------------------------|--|-----------|------------|-----------|
| Type | | 431 / 433 | 433 PN 160 | 427 / 429 |
| Metric units min. [bar] | | 0.2 | 0.3 | 1.5 |
| Metric units max. [bar] | | 40 | 160 | 40 |

| Temperature application range | | 431 / 433 | 433 PN 160 | 427 / 429 |
|-------------------------------|--|-----------|------------|-----------|
| Type | | 431 / 433 | 433 PN 160 | 427 / 429 |
| According to DIN EN min. [°C] | | -270 | -270 | -270 |
| According to DIN EN max. [°C] | | 450 | 450 | 450 |

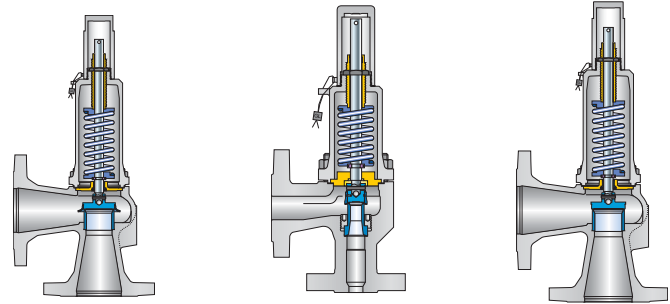

| Capacity | | Type | 431 / 433 | 433 PN 160 | 427 / 429 |
|--|------|------|-----------|------------|--|
| Attention: Series 433 and 429 are CE certified, however not according to ASME. | | | | | |
| LEO _{S/G} | min. | | 0.111 | 0.111 | 0.023 |
| LEO _{S/G} | max. | | 4.016 | 0.111 | 1.374 |
| Orifice _{S/G} | min. | | 1.0 x D | 1.0 x D | 1.0 x D |
| Orifice _{S/G} | max. | | 1.1 x M | 1.0 x D | 1.07 x J |
| LEO _L | min. | | 0.115 | 0.129 | The required discharge coefficient for liquids of α_w 0,05 acc. to AD 2000-Merkblatt A2 is not reached, therefore a component test is not possible. |
| LEO _L | max. | | 3.963 | 0.127 | |
| Orifice _L | min. | | 1.0 x D | 1.2 x D | |
| Orifice _L | max. | | 1.1 x M | 1.2 x D | |

| Coefficient of discharge | | Type | 431 / 433 | | | | 433 PN 160 | | 427 / 429 |
|---|-------------------------|------|-------------------|------------------|-------|-------------|-------------------|------------------|--|
| | | | DN 15 O-ring disc | DN 15 Metal seat | DN 20 | DN 25 - 150 | DN 15 O-ring disc | DN 15 Metal seat | |
| Pressure increase acc. to DIN EN ISO 4126 | | | 10% | 10% | 10% | 10% | 10% | 10% | 10% |
| | K_{dr} / α_w S/G | | 0.59 | 0.62 | 0.29 | 0.38 | 0.59 | 0.62 | 0.13 |
| | K_{dr} / α_w L | | 0.47 | 0.48 | 0.19 | 0.25 | 0.47 | 0.48 | The required discharge coefficient for liquids of α_w 0,05 acc. to AD 2000-Merkblatt A2 is not reached, therefore a component test is not possible. |

| Approvals | | | Type | 431 / 433 | 433 PN 160 | 427 / 429 |
|-----------------------------|------------------------------|-------|------|---------------------|---------------------|---------------------|
| Country | Code | Media | | | HDD | |
| Europe | DIN EN ISO 4126-1 CE marking | S/G/L | | 072020111Z0008/0/06 | 072020111Z0008/0/06 | 072020111Z0008/0/04 |
| Germany | AD 2000-Merkblatt A2 | S/G/L | | TÜV SV 577 | TÜV SV 577 | TÜV SV 610 |
| China | AQSIQ | S/G/L | | ✓ | ✓ | - |
| Russia | TR / RTN | S/G/L | | ✓ | ✓ | - |
| Kazakhstan | GOST-K | S/G/L | | ✓ | ✓ | - |
| Belarus | GOSPROMNAZADOR | S/G/L | | ✓ | ✓ | ✓ |
| Classification societies | | | | | | |
| Bureau Veritas | BV | | | ✓ | ✓ | On request |
| ClassNK NIPPON Kaiji Kyokai | NK | | | ✓ | ✓ | |
| Det Norske Veritas | DNV | | | ✓ | ✓ | |
| Germanischer Lloyd | GL | | | ✓ | ✓ | |
| Lloyd's Register EMEA | LREMEA | | | ✓ | ✓ | |
| Registro Italiano Navale | RINA | | | ✓ | ✓ | |

| General signs and symbols | | Signs and symbols for flange drillings and flange facings | |
|----------------------------|--------------|---|---|
| <input type="checkbox"/> * | Standard | <input type="checkbox"/> * | Standard construction, specification of an option code not necessary |
| <input type="checkbox"/> ✓ | Available | <input type="checkbox"/> (*) | Flange dimensions with exception of flange thickness as per flange standards (e.g. ASME B16.5) Flange thickness is less (max. 2 mm), see "Hole patterns valid for different pressure ratings" |
| <input type="checkbox"/> - | Not possible | <input type="checkbox"/> - | Flange hole pattern / sealing surface not possible |

Option code for flange drillings and dimensions, e.g. H50

| | |
|-------------------|--|
| H50 | Flange drilling as specified in flange standard Outer flange diameter, flange thickness and height of flange facing may be larger, see "Dimensions" |
| (H50) | Flange dimensions except flange thickness are in accordance with standards (e.g. ASME B16.5) Flange thickness is smaller (max. 2 mm), see "Multiple pressure rating" |
| Stock Fini | Flange drilling as specified in standard. Flange thickness may be less than the flange outer diameter as specified in the standard, however complete nut support area is available |

Option code for flange sealing surfaces, e.g. L36

| | |
|------------|---|
| L36 | Flange facing as specified in standard (e.g. Flange facing inlet Type B2 "smooth finish") |
|------------|---|

General information concerning flange drillings and flange facings

| | |
|---------------------------------|---|
| Multiple pressure rating | The flange standard shows the same drilling, facing and outer diameter for several pressure ratings, e.g. from PN 16 to PN 40. Due to the pressure rating of the body, LESER fulfills the requirements for flange thickness, e.g. PN 16 but not PN 40. |
| Smooth Finish | In the applicable MSS SP-6 (Edition 2001), "Smooth Finish" is no longer mentioned. In MSS SP-6 (Edition 1980), "Smooth Finish" was defined as the surface quality of the flange with "250 µinch (6.3 µm) AARH max.". LESER supplies flange sealing surfaces according to ASME B16.5 – 1996, Paragraph 6.4.4.3: "Either a serrated concentric or serrated spiral finish resulting in service finish from 125 to 250 µinch average roughness shall be furnished" This finish meets the requirements of MSS SP-6 (Edition 1980), which is not valid anymore! |
| Stock Finish | "Stock Finish" is not defined in any technical standard. If "Stock Finish" is specified in the order, then LESER delivers standard flange sealing surfaces as per DIN or ASME (marked with * in the "Flange sealing surfaces" table for each series). |

Pressures – Symbols in use

| Symbols | Name | Metric units |
|-----------------|---|------------------|
| p | Set pressure | bar |
| p ₀ | Absolute pressure in vessel = p · 1.1 + 1.013 = p · 1.1 + 14.5 The overpressure is 10% of the set pressure, but at least 0.2 bar | bar _a |
| p _a | Back pressure | bar |
| p _{a0} | Absolute back pressure (= p _a + 1.013) (= p _a + 14.5) | bar _a |


Materials

In the table below, you will find a list of the LESER material codes. Please take into consideration that

- material quality certificate 3.1 acc. to EN 10204 is available for each body material
- material quality certificate 3.1, which certifies different materials, is available for many materials.

| Material code | Valve body with flanges | Body material is certified acc. to 3.1 (EN 10204) for the following materials | |
|---------------|-------------------------------|---|-------------------------------------|
| | | acc. to DIN EN | acc. to ASME |
| xxx1.xxxx | Grey iron | 0.6025 | Cast iron |
| xxx2.xxxx | Carbon steel | 1.0619 | WCB, WCC |
| xxx4.xxxx | Stainless steel | 1.4408, 1.4581 | CF8M (Charpy Test at -196°C), CF10M |
| xxx5.xxxx | Nodular cast iron | 0.7043 | Ductile Gr. 60-40-18 |
| xxx7.xxxx | High temperature carbon steel | 1.7357 | WC6 |

Example of determination of K_{dr}/α_w : Type 433 DN 25

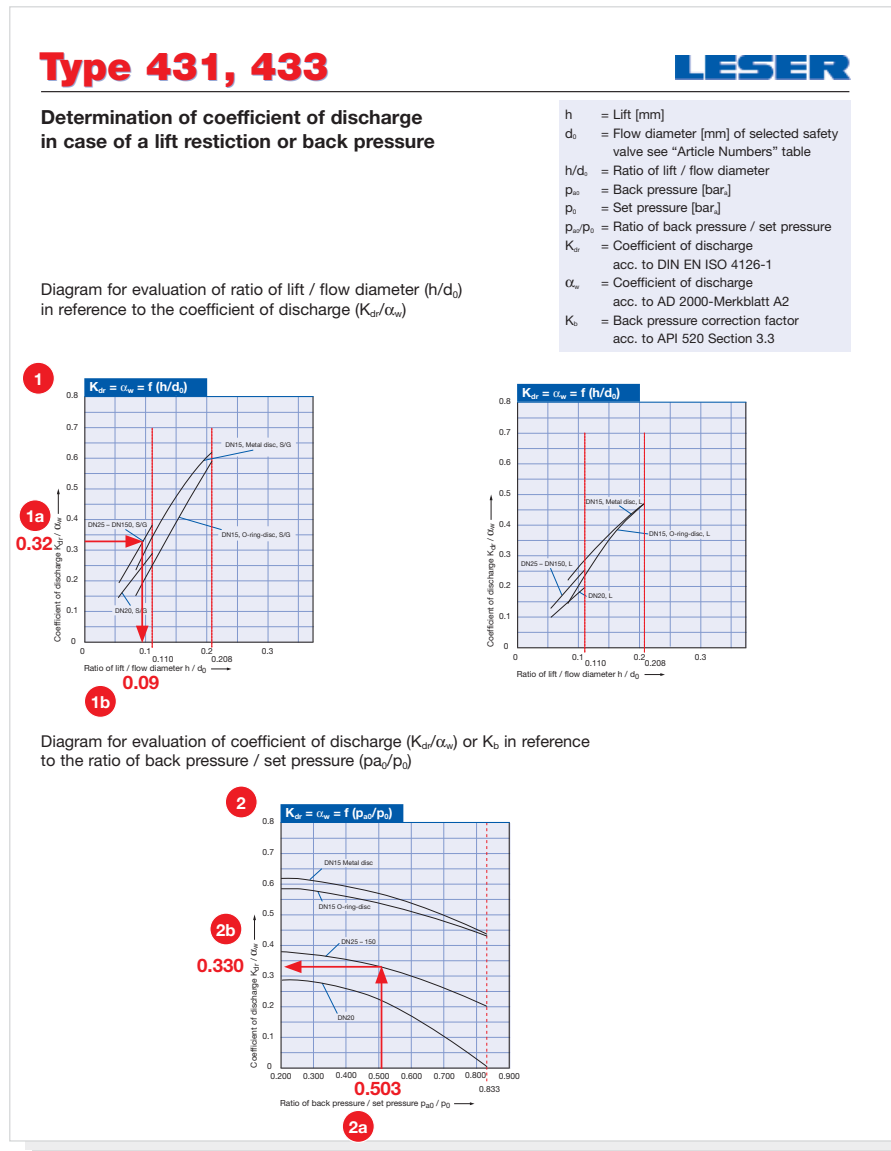

Explanation

Example – Type 433, flow diameter $d_0 = 13$ mm, Lift $h = 3.0$ mm, $K_{dr}/\alpha_w D/G = 0.81$

| 1 Diagram 1 Determining the restricted lift due to reduced K_{dr}/α_w | | | 2 Diagram 2 Determination of reduced K_{dr}/α_w or K_b due to back pressure | | |
|--|--|---------------------------------------|--|---|--|
| Step | Description | Example | Step | Description | Example |
| 1 | Calculation of the necessary coefficient of discharge for the selected safety valve. The applicable formulas are to be taken from the codes and standards. | 1a $K_{dr}/\alpha_w = 0.32$ | 1 | Calculation of the back pressure p_{ba}/p_0 with the use of the set pressure p_0 [bar _a] 0.962 and the back pressure p_{ba} [bar _a] 1.913 | 2a $p_{ba}/p_0 = 0.503$ |
| 2 | Choose the starting point (0.3) on the Y-axis of the diagram | | 2 | Choose the starting point (0.503) on the X-axis of the diagram | |
| 3 | Draw a horizontal line to determine the intersection point of the curves. | | 3 | Draw a vertical line to determine the intersection point of the curves. | |
| 4 | Draw a vertical line through the intersection point on the X-axis to determine the ratio of lift / flow diameter (h/d_0). | 1b $h/d_0 = 0.09$ | 4 | Draw a horizontal line through the intersection point on the Y-axis to determine the reduced coefficient of discharge K_{dr}/α_w | 2b $K_{dr}/\alpha_w = 0.330$ |
| 5 | Calculation of the lift stopper with the formula $h = d_0 \times h/d_0$. (To order the lift restriction, please choose option code J51; see page 99/20). | $h = 13 \times 0.09$ $h = 1.17$ mm | 5 | Calculation of the valve with the established coefficient of discharge K_{dr}/α_w or the correction factor for back pressure K_b | |

Sample capacity table – How to select capacities for steam: Type 433 DN 25

Capacity table – steam

Capacities for saturated steam according to AD 2000-Merkblatt A2, based on set pressure plus 10% overpressure.

| Metric units | | AD 2000-Merkblatt A2 [kg/h] | | | | | | | | | | | | | |
|---|-----------------|-----------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--|--|--|
| | O-ring disc | Metal seat | | | | | | | | | | | | | |
| DN _i | 15 | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 | 125 | 150 | | | |
| DN _o | 15 | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 | 125 | 150 | | | |
| Actual Orifice diameter d ₀ [mm] | 12 | 12 | 18 | 18 | 18 | 23 | 29 | 37 | 46 | 60 | 74 | 92 | | | |
| Actual Orifice area A ₀ [mm ²] | 113 | 113 | 254 | 254 | 254 | 416 | 661 | 1075 | 1662 | 2827 | 4301 | 6648 | | | |
| LEO _{S/G} * [inch ²] | 0.111 | 0.111 | 0.117 | 0.154 | 0.154 | 0.251 | 0.399 | 0.650 | 1.004 | 1.708 | 2.598 | 4.016 | | | |
| Set pressure [bar] | Capacity [kg/h] | | | | | | | | | | | | | | |
| 0.2 | | | | 34 | 34 | 55 | 88 | 142 | 220 | 375 | 570 | 880 | | | |
| 0.5 | 55 | 53 | 30 | 63 | 63 | 102 | 163 | 265 | 410 | 697 | 1060 | 1638 | | | |
| 1 | 78 | 78 | 67 | 101 | 101 | 165 | 263 | 428 | 661 | 1125 | 1711 | 2645 | | | |

| Explanation | | Type 433 DN 25 | | |
|-------------|-------------------------|--------------------|----------------------|-------------------------|
| No. | Name | | Metric units | Example |
| 1 | Code | | | AD 2000-Merkblatt A2 |
| 2 | Nominal inlet diameter | DN _i | | 25 |
| 3 | Nominal outlet diameter | DN _o | | 25 |
| 4 | Actual orifice diameter | d ₀ | [mm] | 18 |
| 5 | Actual orifice area | A ₀ | [mm ²] | 254 |
| 6 | LESER Effective Orifice | LEO _{S/G} | [inch ²] | 0.154 |
| 7 | Set pressure | | [bar _g] | 1 |
| 8 | Capacity | | [kg/h] | 101 |
| 9 | Calculation basis | | | See table on page 00/10 |

9

| Calculation basis | | Metric units | |
|-----------------------------------|---------------------------------------|---|----------------------------------|
| Code | | Capacity calculation according to AD 2000-Merkblatt A2 | |
| Medium | | | |
| Steam (Saturated steam) | Standard conditions | Steam table IAPWS-IF97 IAPWS Industrial Formulation for the Thermodynamic Properties of water and steam | [kg/h] |
| Air | Standard conditions | 0 °C and 1013 mbar | [m _n ³ /h] |
| Water | Standard conditions | 20 °C | [10 ³ kg/h] |
| All media | | | |
| | Design pressure | Set pressure plus 10% overpressure | |
| | Design pressure for low set pressures | Capacity at 1 bar (14.5 psig) and lower are calculated at 0.1 bar (1.45 psig) overpressure. | |

| Example | | Determining the design pressure | |
|--------------|--|---------------------------------|--|
| Metric units | | | |
| Set pressure | Design pressure | | |
| 10 bar | 10 bar + 10% overpressure = 11 bar | | |
| 0.5 bar | 0.5 bar + 0.1 bar overpressure = 0.6 bar | | |

6

LESER Effective Orifice

Pressure relief devices may be initially sized using the equations shown in API RP 520, Section 3.6 to 3.10 for steam, gasses, liquids, or two-phase flow. These equations use the coefficient of discharge (S/G 0.975, L 0.650) and the effective area (acc. to API Std. 526, Fifth Edition, June 2002, table 1), which are independent of the valve design.

This way, the designer can determine a preliminary valve size. By using the LESER Effective Orifice (LEO), the designer can select the safety valve directly according to the calculation. A verification with the selected actual orifice area and the accorded coefficient of discharge is not necessary.

| | | | |
|--------------------------|---|---------------------------|----------------|
| LEO_{S/G} | LESER Effective Orifice (for steam and gasses) | [inch²] | see page 00/11 |
| LEO_L | LESER Effective Orifice (for liquids) | [inch²] | see page 00/12 |

For further information refer to LESER ENGINEERING at www.leser.com/engineering.

The table is based on the accorded coefficient of discharge for steam and gases for ASME certified LESER safety valves.
The associated K-values can be seen in the "K-values" column.

$$LEO_{S/G} [\text{inch}^2] = A_0 [\text{inch}^2] \cdot \left(\frac{K}{0.975} \right)$$

| LEO _{S/G} | | LESER Effective Orifice (for steam, gas and vapor) | | | | | | |
|-------------------------|--------------|--|------------|---------------------|--|---|--------------------------|-------------------------|
| Orifice acc. to API 526 | LESER series | DN | Inlet size | d ₀ [mm] | K _{dr} /α _w -values K-value ¹⁾ | LEO _{S/G} [inch ²] | % of next higher orifice | % of next lower orifice |
| | 429 | 15 | 1/2" | 12.0 | 0.130 | 0.023 | 21.2% | |
| | 429 | 20 | 3/4" | 18.0 | 0.130 | 0.053 | 47.8% | |
| | 429 | 25 | 1" | 18.0 | 0.130 | 0.053 | 47.8% | |
| | 429 | 32 | 1 1/2" | 18.0 | 0.130 | 0.053 | 47.8% | |
| | 429 | 40 | 1 1/2" | 23.0 | 0.130 | 0.086 | 78.1% | |
| | 433 | 15 O-ring disc | 1/2" | 12.0 | 0.590 | 0.106 | 96.4% | |
| D | | | | | | 0.110 | 100.0% | 100.0% |
| | 433 | 15 Metal seat | 1/2" | 12.0 | 0.620 | 0.111 | 56.9% | 101.3% |
| | 433 | 20 | 3/4" | 18.0 | 0.290 | 0.117 | 56.9% | 106.7% |
| | 429 | 50 | 2" | 29.0 | 0.130 | 0.137 | 69.6% | 124.1% |
| | 433 | 25 | 1" | 18.0 | 0.380 | 0.154 | 78.4% | 139.8% |
| | 433 | 32 | 1 1/2" | 18.0 | 0.380 | 0.154 | 78.4% | 139.8% |
| E | | | | | | 0.196 | 100.0% | 100.0% |
| | 429 | 65 | 2 1/2" | 37.0 | 0.130 | 0.222 | 72.4% | 113.4% |
| | 433 | 40 | 1 1/2" | 23.0 | 0.380 | 0.251 | 81.8% | 128.1% |
| F | | | | | | 0.307 | 100.0% | 100.0% |
| | 429 | 80 | 3" | 46.0 | 0.130 | 0.343 | 68.3% | 111.9% |
| | 433 | 50 | 2" | 29.0 | 0.380 | 0.399 | 79.3% | 130.0% |
| G | | | | | | 0.503 | 100.0% | 100.0% |
| | 429 | 100 | 4" | 60.0 | 0.130 | 0.584 | 74.4% | 116.2% |
| | 433 | 65 | 2 1/2" | 37.0 | 0.380 | 0.650 | 82.7% | 129.1% |
| H | | | | | | 0.785 | 100.0% | 100.0% |
| | 429 | 125 | 5" | 74.0 | 0.130 | 0.889 | 69.1% | 113.2% |
| | 433 | 80 | 3" | 46.0 | 0.380 | 1.004 | 78.0% | 127.9% |
| J | | | | | | 1.287 | 100.0% | 100.0% |
| | 429 | 150 | 6" | 92.0 | 0.130 | 1.374 | 74.7% | 106.7% |
| | 433 | 100 | 4" | 60.0 | 0.380 | 1.708 | 92.9% | 132.7% |
| K | | | | | | 1.838 | 100.0% | 100.0% |
| | 433 | 125 | 5" | 74.0 | 0.380 | 2.598 | 91.1% | 141.4% |
| L | | | | | | 2.853 | 100.0% | 100.0% |
| M | | | | | | 3.600 | 100.0% | 100.0% |
| | 433 | 150 | 6" | 92.0 | 0.380 | 4.016 | 92.5% | 116.3% |
| N | | | | | | 4.340 | 100.0% | 100.0% |

¹⁾ There is no ASME approval for the LESER Modulate Action Series 433 and 429. In order to be able to still use the LEO and hence obtain compatibility to the orifice acc. to API 526, the K_{dr}/α_w-value (approval acc. to DIN EN ISO 4126-1 and AD 2000-Merkblatt A2) was brought into the calculation.

The table is based on the accorded coefficient of discharge for liquids for ASME certified LESER safety valves.
The associated K-values can be seen in the "K-values" column.

$$LEO_L [\text{inch}^2] = A_0 [\text{inch}^2] \cdot \left(\frac{K}{0.650} \right)$$

| LEO _L | | LESER Effective Orifice (for liquids) | | | | | | |
|-------------------------|--------------|---------------------------------------|------------|---------------------|--|---------------------------------------|--------------------------|-------------------------|
| Orifice acc. to API 526 | LESER series | DN | Inlet size | d ₀ [mm] | K _{dr} /α _w -values K-value ¹⁾ | LEO _L [inch ²] | % of next higher orifice | % of next lower orifice |
| D | | | | | | 0.110 | 100.0% | 100.0% |
| | 433 | 20 | 3/4" | 18.0 | 0.190 | 0.115 | 58.8% | 104.8% |
| | 433 | 15 O-ring disc | 1/2" | 12.0 | 0.590 | 0.127 | 64.8% | 115.5% |
| | 433 | 15 Metal seat | 1/2" | 12.0 | 0.480 | 0.129 | 66.0% | 117.7% |
| | 433 | 25 | 1" | 18.0 | 0.250 | 0.152 | 77.4% | 137.9% |
| | 433 | 32 | 1 1/2" | 18.0 | 0.250 | 0.152 | 77.4% | 137.9% |
| E | | | | | | 0.196 | 100.0% | 100.0% |
| | 433 | 40 | 1 1/2" | 23.0 | 0.250 | 0.248 | 80.7% | 126.4% |
| F | | | | | | 0.307 | 100.0% | 100.0% |
| | 433 | 50 | 2" | 29.0 | 0.250 | 0.394 | 78.3% | 128.3% |
| G | | | | | | 0.503 | 100.0% | 100.0% |
| | 433 | 65 | 2 1/2" | 37.0 | 0.250 | 0.641 | 81.7% | 127.4% |
| H | | | | | | 0.785 | 100.0% | 100.0% |
| | 433 | 80 | 3" | 46.0 | 0.250 | 0.991 | 77.0% | 126.2% |
| J | | | | | | 1.287 | 100.0% | 100.0% |
| | 433 | 100 | 4" | 60.0 | 0.250 | 1.686 | 91.7% | 131.0% |
| K | | | | | | 1.838 | 100.0% | 100.0% |
| | 433 | 125 | 5" | 74.0 | 0.250 | 2.564 | 89.9% | 139.5% |
| L | | | | | | 2.853 | 100.0% | 100.0% |
| M | | | | | | 3.600 | 100.0% | 100.0% |
| | 433 | 150 | 6" | 92.0 | 0.250 | 3.963 | 91.3% | 110.1% |
| N | | | | | | 4.340 | 100.0% | 100.0% |

¹⁾ There is no ASME approval for the LESER Modulate Action Series 433. In order to be able to still use the LEO and hence obtain compatibility to the orifice acc. to API 526, the K_{dr}/α_w-value (approval acc. to DIN EN ISO 4126-1 and AD 2000-Merkblatt A2) was brought into the calculation.

Normative basis

NACE MR0175-2003

In accordance with NACE standard MR0175-2003 sour gas service means the presence of H₂S in the following conditions:

Section 1.4.1.1 All gas, gas condensate, and sour crude oil – When the partial pressure of H₂S in a wet (water as a liquid) gas phase of a gas, gas condensate, or crude oil system is equal to or exceeds 0.003 bar_g (0.05 psia)

Exceptions are:

Section 1.4.2.1 Low-pressure gas

When the total pressure is lower than 4.5 bar_a (65 psia)

Section 1.4.2.2 Low-pressure oil and gas multiphase systems: ...

Other Sour gas standards:

NACE MR0103-2003: Materials resistance to sulfide stress cracking in corrosive petroleum refining environments.

DIN EN ISO 15156-1: Petroleum and natural gas industries – Materials for use in H₂S containing environments in oil and gas production – Part 1: General principles for selection of cracking-resistant materials (ISO 15156-1:2001)

Works standard: Please refer to LWN 001.91

General requirements for the use of sour gas

The standards given above require a maximum hardness of 22 HRC for most steels. The current requirements for a specific material are to be taken for the applied standards.

LESER sour gas level

General: The material requirements for the use of sour gas must be met if pressures and partial pressures are present according to the applied standards.

If an NACE construction is desired, then option code N78 must be selected.

The option codes for the individual components are given in the following table.

Based on this general statement, LESER defines two sour gas levels for safety valves:

| Definition | Level 1 | | Level 2 | |
|--|--|--------------------|---|------------------|
| | Conventional | Balanced bellows | Conventional | Balanced bellows |
| Parts in contact with the medium with valve closed | Parts in contact with the medium with valve closed | | Parts in contact with the medium with open, flowing valve | |
| Contact surfaces | | | | |
| Pressure requirements | Set pressure ≥ 4.5 bar _a | | Back pressure ≥ 4.5 bar _a | |
| Safety valve operation | closed | | closed / open | |
| Affected components | Conventional design | Body / seat / disc | All | |
| | Balanced bellows design | Body / seat / disc | Body / seat / disc Bonnet spacer, Bellows | |

Required material adjustment

| Type | Body material | Design | Part | Material | Option code | Material | Option code |
|-------------|---------------|------------------|------------------|------------------------|----------------|---|----------------|
| 4292 | 1.0619 (WCB) | Conventional | Disc | 1.4404 / 316L | L44 | Please choose balanced bellows construction | |
| 4332 | | | Disc | 1.4404 / 316L | L44 | 1.4404 / 316L | L44 |
| 4332 PN 160 | | Balanced bellows | Balanced bellows | 1.4571 / 316Ti | J78 | 1.4571 / 316Ti | J78 |
| 4294 | 1.4408 (CF8M) | Conventional | | No adjustment required | | No adjustment required | |
| 4334 | | | Balanced bellows | Balanced bellows | 1.4571 / 316Ti | J78 | 1.4571 / 316Ti |
| 4334 PN 160 | | | | | | | |



Type 431
Plain lever H3
Open bonnet
Conventional design

Type 431, 433

Type 433

Flanged Safety Relief Valves - spring loaded



Type 433
Cap H2
Closed bonnet
Conventional design

Contents

Chapter/Page

Materials

- Conventional design 01/02
- Balanced bellows design 01/04

How to order

- Numbering system 01/06
- Article numbers 01/08

Pressure temperature ratings

- Metric units 01/10

Dimensions and weights

- Metric units 01/12

Approvals 01/13

Flange drillings 01/14

Flange facings 01/15

Order information – spare parts 01/16

Available options 01/18


Capacities

- Steam [Metric units] 01/19
- Air [Metric units] 01/20
- Water [Metric units] 01/21

Determination of coefficient of discharge K_{dr}/α_w 01/22

Conventional design

Type 433

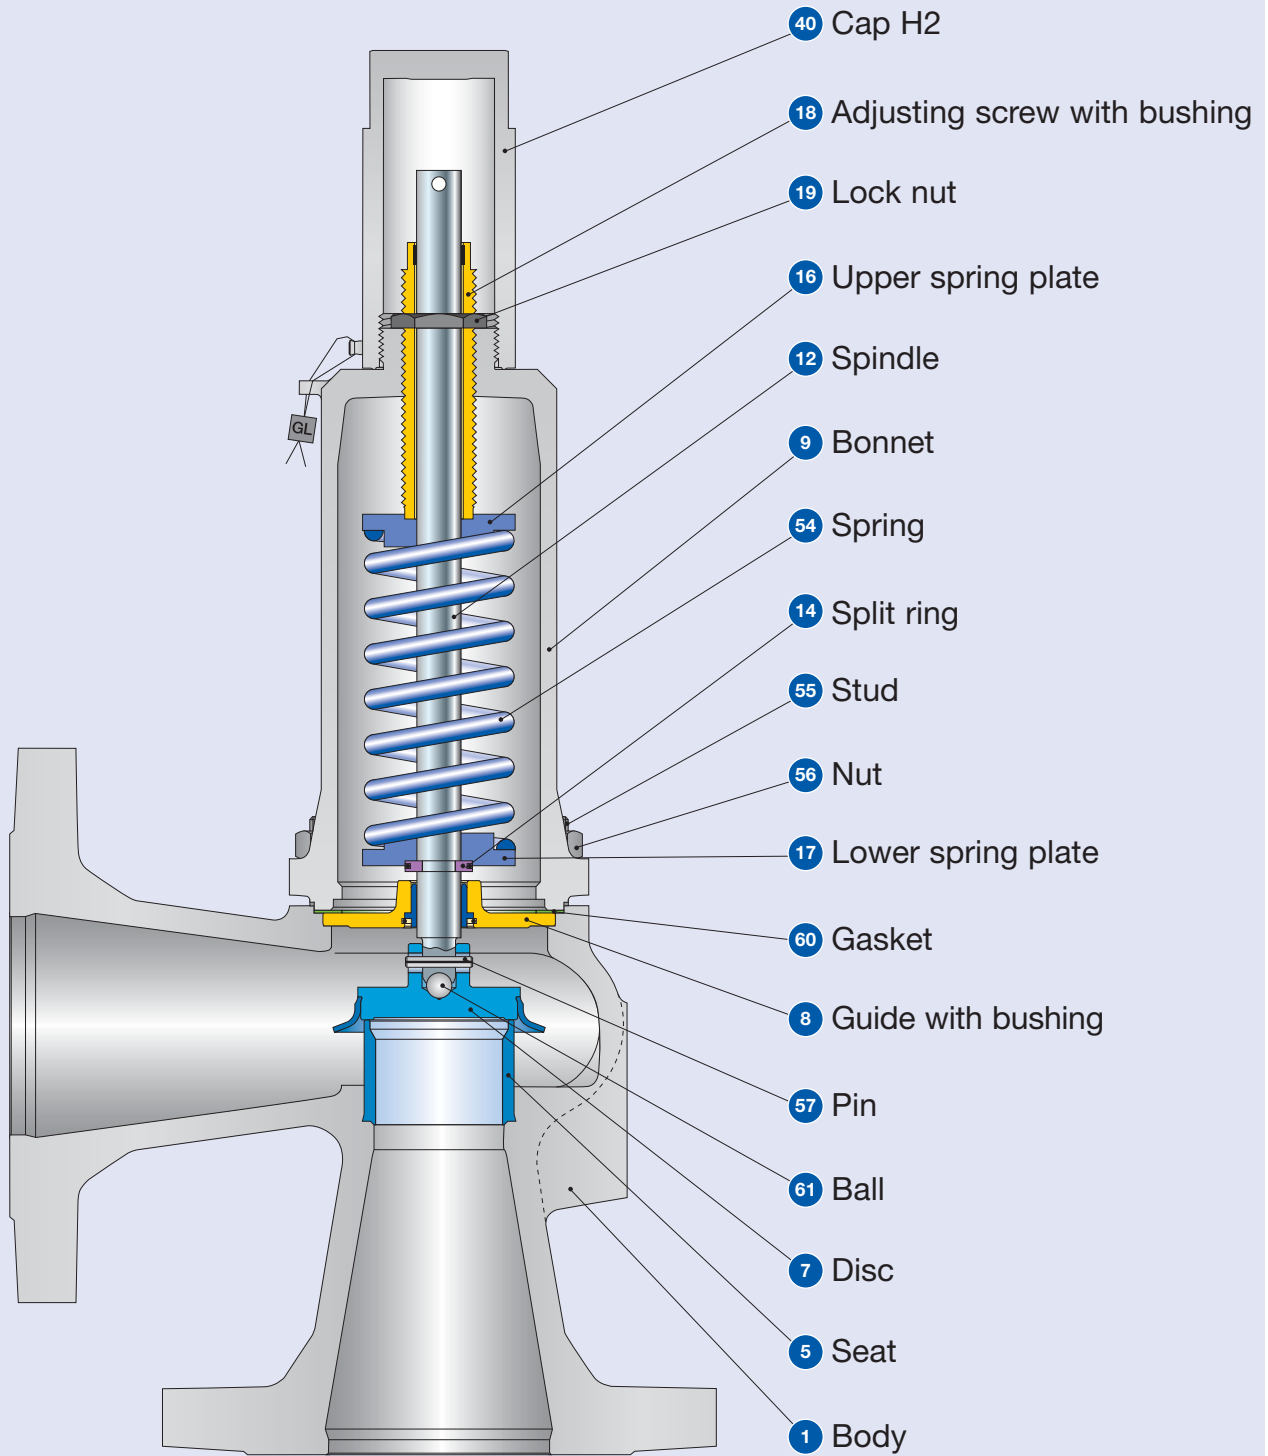

Conventional design

| Materials | | Type 4311 / 4331 | Type 4315 / 4335 | Type 4312 / 4332 | Type 4334 |
|--------------|------------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| 1 | Body | 0.6025 | 0.7043 | 1.0619 | 1.4408 |
| | | Cast iron | Ductile Gr. 60-40-18 | SA 216 WCB | SA 351 CF8M |
| 5 | Seat | 1.4404 | 1.4404 | 1.4404 | 1.4404 |
| | | 316L | 316L | 316L | 316L |
| 7 | Disc | 1.4122 | 1.4122 | 1.4122 | 1.4404 |
| | | Hardened stainless steel | Hardened stainless steel | Hardened stainless steel | 316L |
| 8 | Guide | 1.4104, 1.0501 | 1.4104, 1.0501 | 1.4104, 1.0501, 1.0570 | 1.4404 |
| | | Chrome or carbon steel | Chrome or carbon steel | Chrome or carbon steel | 316L |
| | with bushing | 1.4104 tenifer | 1.4104 tenifer | 1.4104 tenifer | – |
| | | Chrome steel tenifer | Chrome steel tenifer | Chrome steel tenifer | – |
| 9 | Bonnet | 0.7040 | 0.7040 | 0.7040 | 1.4408, 1.4404 |
| | | Ductile Gr. 60-40-18 | Ductile Gr. 60-40-18 | Ductile Gr. 60-40-18 | SA 351 CF8M, SA 479 316L |
| 12 | Spindle | 1.4021 | 1.4021 | 1.4021 | 1.4404 |
| | | 420 | 420 | 420 | 316L |
| 14 | Split ring | 1.4104 | 1.4104 | 1.4104 | 1.4404 |
| | | Chrome steel | Chrome steel | Chrome steel | 316L |
| 16/17 | Spring plate | 1.0718 | 1.0718 | 1.0718 | 1.4404 |
| | | Steel | Steel | Steel | 316L |
| 18 | Adjusting screw with bushing | 1.4104 PTFE | 1.4104 PTFE | 1.4104 PTFE | 1.4404 PTFE |
| | | Chrome steel PTFE | Chrome steel PTFE | Chrome steel PTFE | 316L PTFE |
| 19 | Lock nut | 1.0718 | 1.0718 | 1.0718 | 1.4404 |
| | | Steel | Steel | Steel | 316L |
| 40 | Cap H2 | 1.0718 | 1.0718 | 1.0718 | 1.4404 |
| | | 12L13 | 12L13 | 12L13 | 316L |
| 54 | Spring, standard | 1.1200, 1.8159, 1.7102 | 1.1200, 1.8159, 1.7102 | 1.1200, 1.8159, 1.7102 | 1.4310 |
| | | Carbon steel | Carbon steel | Carbon steel | Stainless steel |
| | Spring, optional | 1.4310 | 1.4310 | 1.4310 | – |
| | | Stainless steel | Stainless steel | Stainless steel | – |
| 55 | Stud | 1.1181 | 1.1181 | 1.1181 | 1.4401 |
| | | Steel | Steel | Steel | B8M |
| 56 | Nut | 1.0501 | 1.0501 | 1.0501 | 1.4401 |
| | | 2H | 2H | 2H | 8M |
| 57 | Pin | 1.4310 | 1.4310 | 1.4310 | 1.4310 |
| | | Stainless steel | Stainless steel | Stainless steel | Stainless steel |
| 60 | Gasket | Graphite / 1.4401 | Graphite / 1.4401 | Graphite / 1.4401 | Graphite / 1.4401 |
| | | Graphite / 316 | Graphite / 316 | Graphite / 316 | Graphite / 316 |
| 61 | Ball | 1.3541 | 1.3541 | 1.3541 | 1.4401 |
| | | Hardened stainless steel | Hardened stainless steel | Hardened stainless steel | 316 |


Please note:

- LESER reserves the right to make changes.
- If several materials are specified LESER defines the material.
- LESER may use higher quality materials without giving prior notice.
- Each component can be constructed of another material according to the customer's specification.
- All components exposed to pressure are highlighted in bold. The material will be specified according to DIN and ASTM here.

Type 431, 433

Balanced bellows design

Type 433

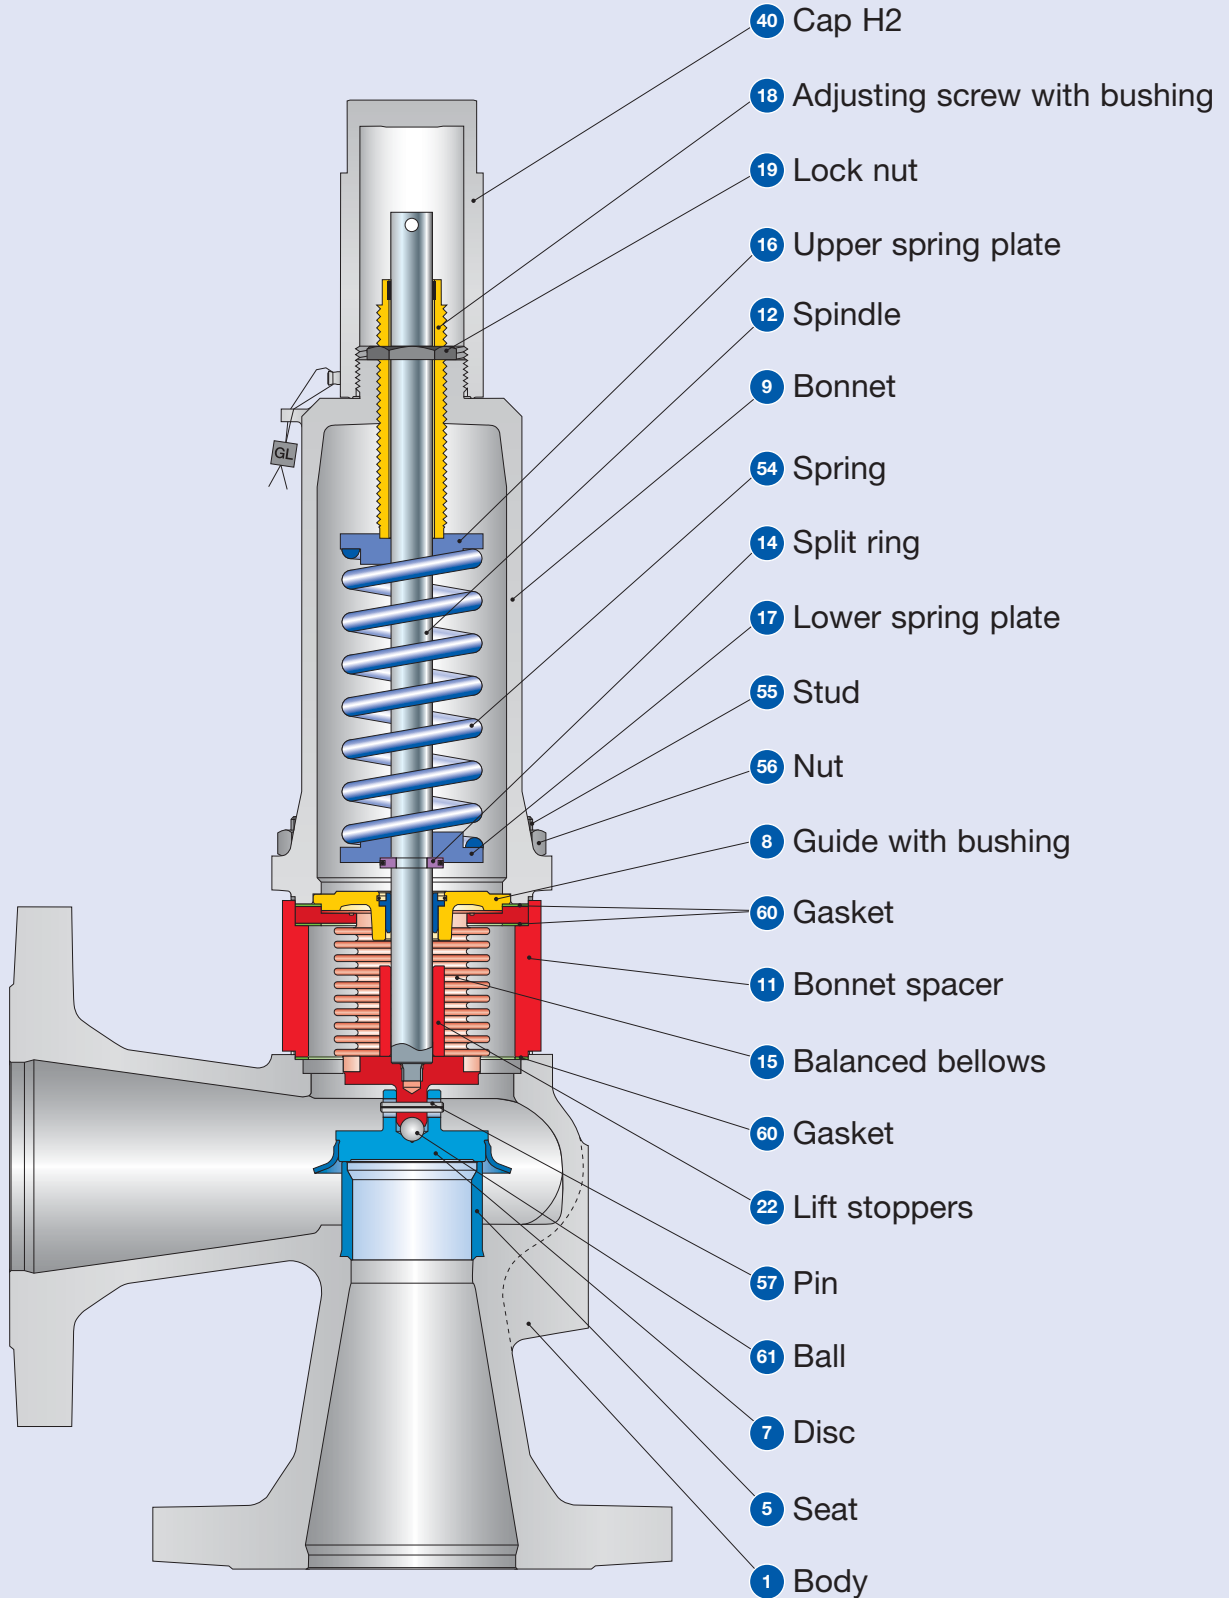

Balanced bellows design

| Materials | | | | | |
|--------------|------------------------------|---------------------------|---------------------------|---------------------------|--------------------------|
| Item | Component | Type 4311 / 4331 | Type 4315 / 4335 | Type 4312 / 4332 | Type 4334 |
| 1 | Body | 0.6025 | 0.7043 | 1.0619 | 1.4408 |
| | | Cast iron | Ductile Gr. 60-40-18 | SA 216 WCB | SA 351 CF8M |
| 5 | Seat | 1.4404 | 1.4404 | 1.4404 | 1.4404 |
| | | 316L | 316L | 316L | 316L |
| 7 | Disc | 1.4122 | 1.4122 | 1.4122 | 1.4404 |
| | | Hardened stainless steel | Hardened stainless steel | Hardened stainless steel | 316L |
| 8 | Guide | 1.4104, 1.0501 | 1.4104, 1.0501 | 1.4104, 1.0501, 1.0570 | 1.4404 |
| | | Chrome or stainless steel | Chrome or stainless steel | Chrome or stainless steel | 316L |
| | with bushing | 1.4104 tenifer | 1.4104 tenifer | 1.4104 tenifer | - |
| | | Chrome steel | Chrome steel | Chrome steel | - |
| 9 | Bonnet | 0.7040 | 0.7040 | 0.7040 | 1.4408, 1.4404 |
| | | Ductile Gr. 60-40-18 | Ductile Gr. 60-40-18 | Ductile Gr. 60-40-18 | SA 351 CF8M, SA 479 316L |
| 11 | Bonnet spacer | 1.4404 | 1.4404 | 1.4404 | 1.4404 |
| | | 316L | 3316L | 316L | 316L |
| 12 | Spindle | 1.4404 | 1.4404 | 1.4404 | 1.4404 |
| | | 316L | 316L | 316L | 316L |
| 14 | Split ring | 1.4104 | 1.4104 | 1.4104 | 1.4404 |
| | | Chrome steel | Chrome steel | Chrome steel | 316L |
| 15 | Balanced bellows | 1.4571 | 1.4571 | 1.4571 | 1.4571 |
| | | 316Ti | 316Ti | 316Ti | 316Ti |
| 16/17 | Spring plate | 1.0718 | 1.0718 | 1.0718 | 1.4404 |
| | | Steel | Steel | Steel | 316L |
| 18 | Adjusting screw with bushing | 1.4104 PTFE | 1.4104 PTFE | 1.4104 PTFE | 1.4404 PTFE |
| | | Chrome steel PTFE | Chrome steel PTFE | Chrome steel PTFE | 316L PTFE |
| 19 | Lock nut | 1.0718 | 1.0718 | 1.0718 | 1.4404 |
| | | Steel | Steel | Steel | 316L |
| 22 | Lift stoppers | 1.4404 | 1.4404 | 1.4404 | 1.4404 |
| | | 316L | 316L | 316L | 316L |
| 40 | Cap H2 | 1.0718 | 1.0718 | 1.0718 | 1.4404 |
| | | 12L13 | 12L13 | 12L13 | 316L |
| 54 | Spring, standard | 1.1200, 1.8159, 1.7102 | 1.1200, 1.8159, 1.7102 | 1.1200, 1.8159, 1.7102 | 1.4310 |
| | | Chrome steel | Chrome steel | Chrome steel | Stainless steel |
| | Spring, optional | 1.4310 | 1.4310 | 1.4310 | - |
| | | Stainless steel | Stainless steel | Stainless steel | - |
| 55 | Stud | 1.4401 | 1.4401 | 1.4401 | 1.4401 |
| | | B8M | B8M | B8M | B8M |
| 56 | Nut | 1.4401 | 1.4401 | 1.4401 | 1.4401 |
| | | 8M | 8M | 8M | 8M |
| 57 | Pin | 1.4310 | 1.4310 | 1.4310 | 1.4310 |
| | | Stainless steel | Stainless steel | Stainless steel | Stainless steel |
| 60 | Gasket | Graphite / 1.4401 | Graphite / 1.4401 | Graphite / 1.4401 | Graphite / 1.4401 |
| | | Graphite / 316 | Graphite / 316 | Graphite / 316 | Graphite / 316 |
| 61 | Ball | 1.3541 | 1.3541 | 1.3541 | 1.4401 |
| | | Hardened stainless steel | Hardened stainless steel | Hardened stainless steel | 316 |

Please note:

- LESER reserves the right to make changes.
- If several materials are specified LESER defines the material.
- LESER may use higher quality materials without giving prior notice.
- Each component can be constructed of another material according to the customer's specification.
- All components exposed to pressure are highlighted in bold. The material will be specified according to DIN and ASTM here.

How to order – Example for numbering system – Type 433

Type 433

1

Article Number

4332.4192

2

Set Pressure

5 bar_g

3

Connections

H45

1
2
3
4

433
2
.
419
2

1 Valve type 431, 433
 Type 433 – with closed bonnet
 Type 431 – with open bonnet

2 Material code

| Code | Body material |
|------|----------------------------------|
| 1 | 0.6025 (cast iron) |
| 2 | 1.0619 (WCB) |
| 4 | 1.4408 (CF8M) |
| 5 | 0.7043 (Ductile Gr. 60-40-18) |

3 Valve code
 Automatically determines nominal diameter and body material (see page 01/09).

4

| Code | Lifting device | |
|------|------------------------------|----|
| 2 | Gas-tight cap | H2 |
| 3 | Plain lever | H3 |
| 4 | Packed lever | H4 |
| 5 | Plain lever with open bonnet | H3 |

Please enter the units (in gauge)!

The specified pressure range may not be exceeded!

See page 01/14.

4 Options

J22

| Type 431, 433 | Option code |
|--|-------------|
| • O-ring disc | |
| CR "K" | J21 |
| EPDM "D" | J22 |
| FKM "L" | J23 |
| FFKM "C" | J20 |
| • Disc 1.4404 / 316L | L44 |
| • Disc 1.4404 / 316L stellited | J25 |
| • Detachable lifting aid | J26 |
| • Balanced bellows | |
| - Bonnet, open (Type 431) | J68 |
| - Bonnet, closed (Type 433) | J78 |
| • Elastomer bellows | J79 |
| • High temperature alloy spring | X01 |
| • Stainless steel spring | X04 |
| • Adaptor for lift indicator H4 | J39 |
| • Lift indicator | J93 |
| • Test gag | |
| - Cap H2 | J70 |
| - Packed lever H4 | J69 |
| • Heating jacket | |
| - Couplings G 3/8 | H29 |
| G 3/4 | H30 |
| - Flange DN 15 | H31 |
| DN 25 | H32 |
| • Drain hole G 1/4 | J18 |
| G 1/2 | J19 |
| • Oil and grease free | J85 |
| • Materials | |
| - NACE | N78 |
| Option code applies only if not standard | |

5 Documentation

H01 L30

Please select the necessary documentation:

| Tests, Certifications: | Option code |
|--|--------------------|
| DIN EN 10204-3.2: TÜV-Nord Certification for set pressure | M33 |
| LESER CGA (Certificate for Global Application) | H03 |
| - Acceptance test certificate 3.1 acc. to DIN EN 10204 | |
| - Declaration of conformity as per pressure equipment directive PED 97/23/EC | |
| Material quality certificate: | |
| DIN EN 10204-3.1 | |
| Component | Option code |
| Body | H01 |
| Bonnet | L30 |
| Cap / lever cover | L31 |
| Disc | L23 |
| Screws | N07 |
| Nuts | N08 |

6 Code and Medium

2.0


| | |
|---|---|
| 1 | 2 |
| 2 | 0 |
| 1 Code | |
| 2. CE / VdTUEV | |
| 3. ASME Section VIII + CE / VdTUEV | |
| 2 Medium | |
| .0 steam / gases / liquids (only valid for CE / VdTUEV) | |

Type 431, 433


LESER

How to order – Article numbers


Type 433

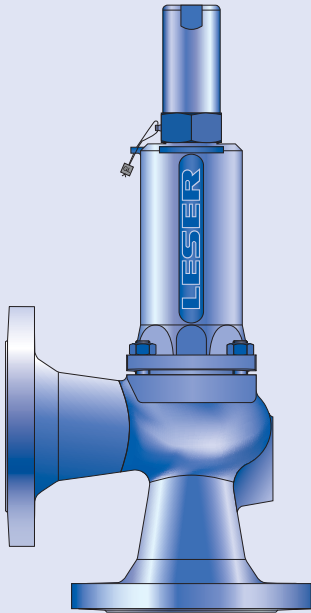


Type 433
Cap H2
Closed bonnet
Conventional design

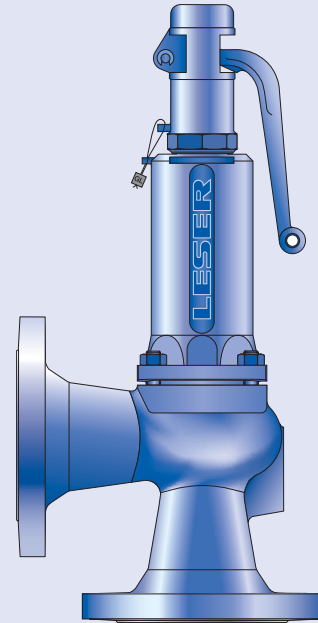


Type 433
Plain lever H3
Closed bonnet
Conventional design

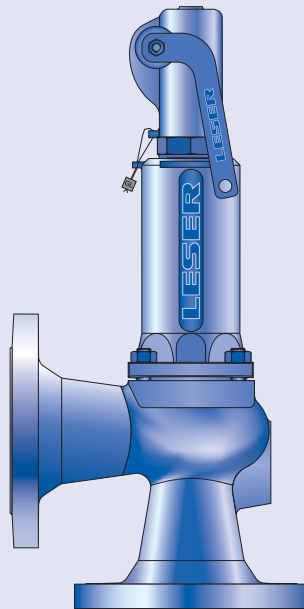

Type 433
Packed lever H4
Closed bonnet
Conventional design

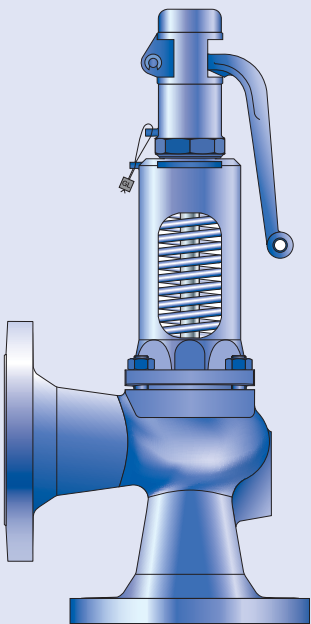

Type 431
Plain lever H3
Open bonnet
Conventional design

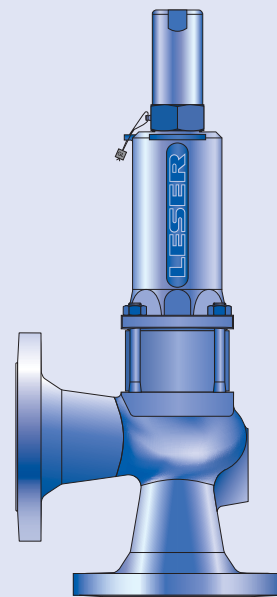

Type 433
Cap H2
Closed bonnet
Balanced bellows design

How to order – Article numbers

| Article numbers | | | | | | | | | | | | | | |
|---|---|----------------|------------|------|------|------|------|------|------|------|------|------|------|------|
| | | O-ring disc | Metal disc | | | | | | | | | | | |
| | DN _i | 15 | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 | 125 | 150 | |
| | DN _o | 15 | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 | 125 | 150 | |
| | Actual orifice diameter d _o [mm] | 12 | 12 | 18 | 18 | 18 | 23 | 29 | 37 | 46 | 60 | 74 | 92 | |
| | Actual orifice area A _o [mm ²] | 113 | 113 | 254 | 254 | 254 | 416 | 661 | 1075 | 1662 | 2827 | 4301 | 6648 | |
| Body material: 0.6025 (cast iron) | | | | | | | | | | | | | | |
| Bonnet closed | H2 | Art.-No. 4331. | 8502 | 3992 | 4012 | 4022 | 4032 | 4042 | 4052 | 4062 | 4072 | 4082 | - | - |
| | H3 | Art.-No. 4331. | 8503 | 3993 | 4013 | 4023 | 4033 | 4043 | 4053 | 4063 | 4073 | 4083 | - | - |
| | H4 | Art.-No. 4331. | 8504 | 3994 | 4014 | 4024 | 4034 | 4044 | 4054 | 4064 | 4074 | 4084 | - | - |
| open | H3 | Art.-No. 4311. | 8505 | 3995 | 4015 | 4025 | 4035 | 4045 | 4055 | 4065 | 4075 | 4085 | - | - |
| Body material: 0.7043 (Ductile Gr. 60-40-18) | | | | | | | | | | | | | | |
| Bonnet closed | H2 | Art.-No. 4335. | 8532 | 8752 | 8762 | 8772 | 8782 | 8792 | 8802 | 8812 | 8822 | 8832 | - | - |
| | H3 | Art.-No. 4335. | 8533 | 8753 | 8763 | 8773 | 8783 | 8793 | 8803 | 8813 | 8823 | 8833 | - | - |
| | H4 | Art.-No. 4335. | 8534 | 8754 | 8764 | 8774 | 8784 | 8794 | 8804 | 8814 | 8824 | 8834 | - | - |
| open | H3 | Art.-No. 4315. | 8535 | 8755 | 8765 | 8775 | 8785 | 8795 | 8805 | 8815 | 8825 | 8835 | - | - |
| Body material: 1.0619 (WCB) | | | | | | | | | | | | | | |
| Bonnet closed | H2 | Art.-No. 4332. | 8512 | 4122 | 4142 | 4152 | 4162 | 4172 | 4182 | 4192 | 4202 | 4212 | 4222 | 4232 |
| | H3 | Art.-No. 4332. | 8513 | 4123 | 4143 | 4153 | 4163 | 4173 | 4183 | 4193 | 4203 | 4213 | 4223 | 4233 |
| | H4 | Art.-No. 4332. | 8514 | 4124 | 4144 | 4154 | 4164 | 4174 | 4184 | 4194 | 4204 | 4214 | 4224 | 4234 |
| open | H3 | Art.-No. 4312. | 8515 | 4125 | 4145 | 4155 | 4165 | 4175 | 4185 | 4195 | 4205 | 4215 | 4225 | 4235 |
| Body material: 1.4408 (CF8M) | | | | | | | | | | | | | | |
| Bonnet closed | H2 | Art.-No. 4334. | 8522 | 4252 | 4272 | 4282 | 4292 | 4302 | 4312 | 4322 | 4332 | 4342 | - | - |
| | H4 | Art.-No. 4334. | 8524 | 4254 | 4274 | 4284 | 4294 | 4304 | 4314 | 4324 | 4334 | 4344 | - | - |

Pressure temperature ratings

Metric units

| | O-ring disc | Metal disc | | | | | | | | | | | |
|---|-------------|------------|-----|-----|-----|-----|-----|------|------|------|------|------|--|
| DN _i | 15 | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 | 125 | 150 | |
| DN _o | 15 | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 | 125 | 150 | |
| Actual orifice diameter d ₀ [mm] | 12 | 12 | 18 | 18 | 18 | 23 | 29 | 37 | 46 | 60 | 74 | 92 | |
| Actual orifice area A ₀ [mm ²] | 113 | 113 | 254 | 254 | 254 | 416 | 661 | 1075 | 1662 | 2827 | 4301 | 6648 | |

Body material: 0.6025 (cast iron)

| DIN flange | Inlet | | PN 16 | | | | | | | | | | - | - | | |
|---|-----------------------|-------|-------|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|-----|---|---|
| | Outlet | | PN 16 | | | | | | | | | | | | | |
| Minimum set pressure | p [bar _g] | S/G/L | 0.3 | 0.3 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | - | - |
| Min. set pressure¹⁾ standard bellows | p [bar _g] | S/G/L | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | - | - |
| Min. set pressure low pressure bellows | p [bar _g] | S/G/L | - | - | 2.0 | 2.0 | 2.0 | 1.8 | 1.9 | 1.8 | 1.8 | 1.2 | - | - | - | - |
| Maximum set pressure | p [bar _g] | S/G/L | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | - | - |
| Max. set pressure with special spring | p [bar _g] | S/G/L | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | - | - |
| Temperature²⁾ acc. to DIN EN | min. [°C] | -10 | | | | | | | | | | | -10 | - | - | |
| | max. [°C] | +150 | | | | | | | | | | | +300 | - | - | |

Body material: 0.7043 (Ductile Gr. 60-40-18)

| DIN flange | Inlet | | PN 40 | | | | | | | | | | - | - | | |
|---|-----------------------|-------|-------|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|-----|---|---|
| | Outlet | | PN 40 | | | | | | | | | | | | | |
| Minimum set pressure | p [bar _g] | S/G/L | 0.3 | 0.3 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | - | - |
| Min. set pressure¹⁾ standard bellows | p [bar _g] | S/G/L | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | - | - |
| Min. set pressure low pressure bellows | p [bar _g] | S/G/L | - | - | 2.0 | 2.0 | 2.0 | 1.8 | 1.9 | 1.8 | 1.8 | 1.2 | - | - | - | - |
| Maximum set pressure | p [bar _g] | S/G/L | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | - | - |
| Max. set pressure with special spring | p [bar _g] | S/G/L | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | - | - |
| Temperature²⁾ acc. to DIN EN | min. [°C] | -45 | | | | | | | | | | | -60 | - | - | |
| | max. [°C] | +150 | | | | | | | | | | | +350 | - | - | |

¹⁾ Min. set pressure of standard bellows = max. set pressure of bellows for low set pressure.

²⁾ The temperature is limited by the soft seal material (see page 99/10). The values given here are valid for EPDM. Between -10°C and the lowest specified application temperature, proceed acc. to AD 2000-Merkblatt W10.

Pressure temperature ratings

| Metric units | | | | | | | | | | | | | | | |
|--|---|-------------|------------|-----|-----|-----|-----|-----|------|------|------|------|------|------------|---|
| | | O-ring disc | Metal disc | | | | | | | | | | | | |
| | DN _i | 15 | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 | 125 | 150 | | |
| | DN _o | 15 | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 | 125 | 150 | | |
| | Actual orifice diameter d ₀ [mm] | 12 | 12 | 18 | 18 | 18 | 23 | 29 | 37 | 46 | 60 | 74 | 92 | | |
| | Actual orifice area A ₀ [mm ²] | 113 | 113 | 254 | 254 | 254 | 416 | 661 | 1075 | 1662 | 2827 | 4301 | 6648 | | |
| Body material: 1.0619 (WCB) | | | | | | | | | | | | | | | |
| DIN flange | Inlet | | PN 40 | | | | | | | | | | | | |
| | Outlet | | PN 40 | | | | | | | | | | | | |
| Minimum set pressure | p [bar _g] | S/G/L | 0.3 | 0.3 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | |
| Min. set pressure¹⁾ standard bellows | p [bar _g] | S/G/L | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | |
| Min. set pressure low pressure bellows | p [bar _g] | S/G/L | – | – | 2.0 | 2.0 | 2.0 | 1.8 | 1.9 | 1.8 | 1.8 | 1.2 | 1.2 | on request | |
| Maximum set pressure | p [bar _g] | S/G/L | 40 | 40 | 40 | 40 | 40 | 40 | 40 | 35 | 35 | 30 | 32 | 16 | |
| Max. set pressure with special spring | p [bar _g] | S/G/L | 40 | 40 | 40 | 40 | 40 | 40 | 40 | 40 | 35 | 30 | 32 | 16 | |
| Temperature²⁾ acc. to DIN EN | min. [°C] | | -45 | | | | | | | | | | | – | |
| | max. [°C] | | +150 | | | | | | | | | | | – | |
| | | | | | | | | | | | | | | – | |
| | | | | | | | | | | | | | | – | |
| Body material: 1.4408 (CF8M) | | | | | | | | | | | | | | | |
| DIN flange | Inlet | | PN 40 | | | | | | | | | | | – | – |
| | Outlet | | PN 40 | | | | | | | | | | | – | – |
| Minimum set pressure | p [bar _g] | S/G/L | 0.3 | 0.3 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | – | – |
| Min. set pressure¹⁾ standard bellows | p [bar _g] | S/G/L | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | – | – |
| Min. set pressure low pressure bellows | p [bar _g] | S/G/L | – | – | 2.0 | 2.0 | 2.0 | 1.8 | 1.9 | 1.8 | 1.8 | 1.2 | – | – | |
| Maximum set pressure | p [bar _g] | S/G/L | 40 | 40 | 40 | 40 | 40 | 40 | 31.6 | 20.2 | 25 | 22 | – | – | |
| Max. set pressure with special spring | p [bar _g] | S/G/L | 40 | 40 | 40 | 40 | 40 | 40 | 40 | 26 | 25 | 22 | – | – | |
| Temperature²⁾ acc. to DIN EN | min. [°C] | | -45 | | | | | | | | | | | – | |
| | max. [°C] | | +150 | | | | | | | | | | | – | |
| | | | | | | | | | | | | | | – | |
| | | | | | | | | | | | | | | – | |

¹⁾ Min. set pressure of standard bellows = max. set pressure of bellows for low set pressure.

²⁾ The temperature is limited by the soft seal material (see page 99/10). The values given here are valid for EPDM. Between -10°C and the lowest specified application temperature, proceed acc. to AD 2000-Merkblatt W10.

Dimensions and weights

Metric units

| | O-ring disc | Metal disc | | | | | | | | | | | |
|---|-------------|------------|-----|-----|-----|-----|-----|------|------|------|------|------|--|
| DN _i | 15 | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 | 125 | 150 | |
| DN _o | 15 | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 | 125 | 150 | |
| Actual orifice diameter d ₀ [mm] | 12 | 12 | 18 | 18 | 18 | 23 | 29 | 37 | 46 | 60 | 74 | 92 | |
| Actual orifice area A ₀ [mm ²] | 113 | 113 | 254 | 254 | 254 | 416 | 661 | 1075 | 1662 | 2827 | 4301 | 6648 | |
| Weight [kg] | 5 | 5 | 6 | 6 | 8 | 9 | 12 | 15 | 20 | 33 | 48 | 65 | |
| with bellows | 6.3 | 6.3 | 6.4 | 6.4 | 8.4 | 9.6 | 13 | 16 | 21.6 | 35.6 | 52.1 | 78.4 | |
| Centre to face [mm] | | | | | | | | | | | | | |
| Inlet a | 90 | 90 | 95 | 100 | 105 | 115 | 125 | 145 | 155 | 175 | 200 | 225 | |
| Outlet b | 90 | 90 | 95 | 100 | 105 | 115 | 125 | 145 | 155 | 175 | 200 | 225 | |
| Height (H4) [mm] | | | | | | | | | | | | | |
| Standard H max. | 310 | 310 | 315 | 320 | 325 | 335 | 360 | 475 | 530 | 605 | 745 | 870 | |
| Bellows H max. | 362 | 362 | 345 | 350 | 360 | 390 | 425 | 535 | 600 | 680 | 825 | 965 | |
| Support brackets [mm] | | | | | | | | | | | | | |
| A | | | | | | | | | | | | 277 | |
| B | | | | | | | | | | | | 160 | |
| (Drilled only on request, option code H42) | | | | | | | | | | | | Ø 18 | |
| C | | | | | | | | | | | | 278 | |
| D | | | | | | | | | | | | 21 | |

Body material: 0.6025 (cast iron)

| | | | | |
|--------------------------------|--------|-------|---|---|
| DIN flange¹⁾ | Inlet | PN 16 | - | - |
| | Outlet | PN 16 | - | - |

Body material: 0.7043 (Ductile Gr. 60-40-18)

| | | | | |
|--------------------------------|--------|-------|---|---|
| DIN flange¹⁾ | Inlet | PN 40 | - | - |
| | Outlet | PN 40 | - | - |


Body material: 1.0619 (WCB)

| | | | | |
|--------------------------------|--------|-------|---|---|
| DIN flange¹⁾ | Inlet | PN 40 | - | - |
| | Outlet | PN 40 | - | - |

Body material: 1.4408 (CF8M)

| | | | | |
|--------------------------------|--------|-------|---|---|
| DIN flange¹⁾ | Inlet | PN 40 | - | - |
| | Outlet | PN 40 | - | - |

¹⁾ Standard flange class For other flange drillings, refer to page 01/14 and 01/15.

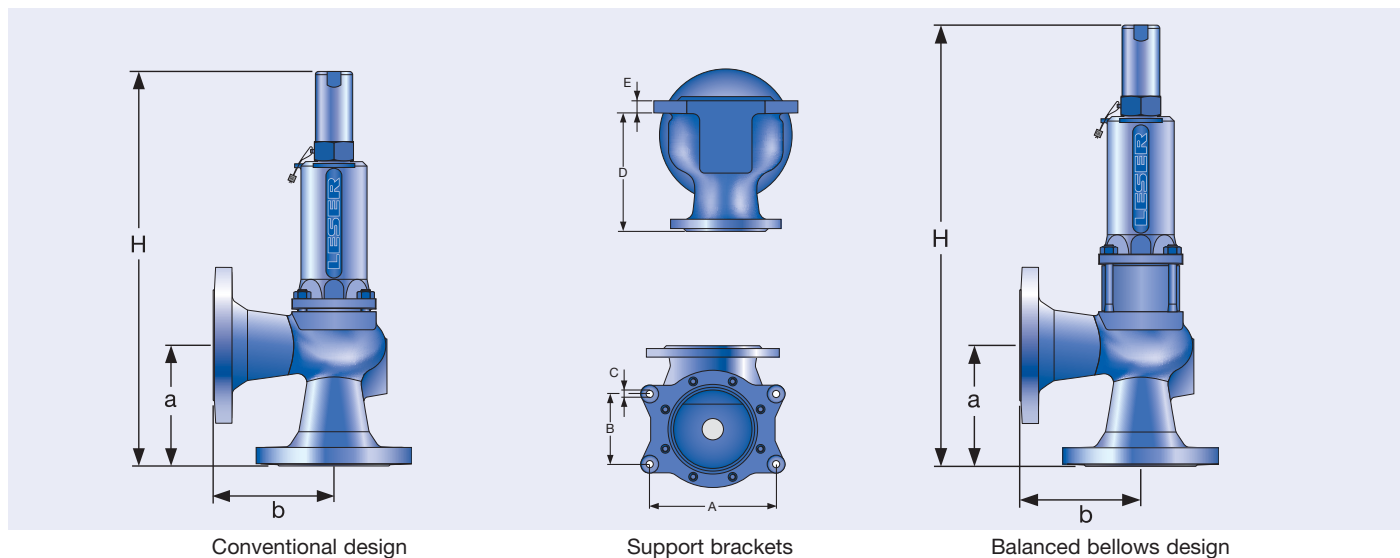

Approvals

| Approvals | | O-ring disc | Metal disc | | |
|---|---|---|------------|------|------------|
| | DN _i | 15 | 15 | 20 | 25 – 150 |
| | DN _o | 15 | 15 | 20 | 25 – 150 |
| | Actual orifice diameter d ₀ [mm] | 12 | 12 | 18 | 18 – 92 |
| | Actual orifice area A ₀ [mm ²] | 113 | 113 | 254 | 254 – 6648 |
| Europe | | Coefficient of discharge K_{dr} | | | |
| PED / DIN EN ISO 4126-1 | Approval-No. | 072020111Z0008/0/06 | | | |
| | S/G | 0.59 | 0.62 | 0.29 | 0.38 |
| | L | 0.47 | 0.48 | 0.19 | 0.25 |
| Germany | | Coefficient of discharge α_w | | | |
| PED / AD 2000-Merkblatt A2 Standard safety valve | Approval-No. | TÜV SV 577 | | | |
| | S/G | 0.59 | 0.62 | 0.29 | 0.38 |
| | L | 0.47 | 0.48 | 0.19 | 0.25 |
| China | | Coefficient of discharge K | | | |
| AQSIQ | Approval-No. | For current Approval-No. see www.leser.com | | | |
| | S/G | 0.59 | 0.62 | 0.29 | 0.38 |
| | L | 0.47 | 0.48 | 0.19 | 0.25 |
| Russia | | Coefficient of discharge K | | | |
| TR/RTN | Approval-No. | For current Approval-No. see www.leser.com | | | |
| | S/G | 0.59 | 0.62 | 0.29 | 0.38 |
| | L | 0.47 | 0.48 | 0.19 | 0.25 |
| Kazakhstan | | Coefficient of discharge α_w | | | |
| GOST-K | Approval-No. | For current Approval-No. see www.leser.com | | | |
| | S/G | 0.59 | 0.62 | 0.29 | 0.38 |
| | L | 0.47 | 0.48 | 0.19 | 0.25 |
| Belarus | | Coefficient of discharge α_w | | | |
| GOSPROMNAZADOR | Approval-No. | For current Approval-No. see www.leser.com | | | |
| | S/G | 0.59 | 0.62 | 0.29 | 0.38 |
| | L | 0.47 | 0.48 | 0.19 | 0.25 |

| Classification societies | Homepage | | The valid Approval-No. changes with each renewal of the approval. For a sample certificate including the valid certification number see www.leser.com |
|-----------------------------|----------|--|---|
| Bureau Veritas | BV | www.bureauveritas.com | |
| ClassNK NIPPON Kaiji Kyokai | NK | www.classnk.or.jp | |
| Det Norske Veritas | DNV | www.dnv.com | |
| Germanischer Lloyd | GL | www.gl-group.com | |
| Lloyd's Register EMEA | LREMEA | www.lr.org | |
| Registro Italiano Navale | RINA | www.rina.org | |

Flange drillings

Flange drillings

| | | O-ring disc | Metal disc | | | | | | | | | | | |
|--|---|-------------|-------------|-------------|---------|-----------------|-----------------|---------|-----------------|---------|---------|---------|---------|--|
| | DN _i | 15 | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 | 125 | 150 | |
| | DN _o | 15 | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 | 125 | 150 | |
| | Valve size | 1/2" x 1/2" | 1/2" x 1/2" | 3/4" x 3/4" | 1" x 1" | 1 1/4" x 1 1/4" | 1 1/2" x 1 1/2" | 2" x 2" | 2 1/2" x 2 1/2" | 3" x 3" | 4" x 4" | 5" x 5" | 6" x 6" | |
| | Actual orifice diameter d ₀ [mm] | 12 | 12 | 18 | 18 | 18 | 23 | 29 | 37 | 46 | 60 | 74 | 92 | |
| | Actual orifice area A ₀ [mm ²] | 113 | 113 | 254 | 254 | 254 | 416 | 661 | 1075 | 1662 | 2827 | 4301 | 6648 | |
| Body material: 0.6025 (cast iron) | | | | | | | | | | | | | | |
| Inlet | DIN EN 1092 | PN 10 | * | * | * | * | * | * | * | * | * | * | * | |
| | | PN 16 | * | * | * | * | * | * | * | * | * | * | * | |
| | | PN 25 | - | - | - | - | - | - | - | - | - | - | - | |
| | | PN 40 | - | - | - | - | - | - | - | - | - | - | - | |
| Outlet | DIN EN 1092 | PN 10 | * | * | * | * | * | * | * | * | * | * | * | |
| | | PN 16 | * | * | * | * | * | * | * | * | * | * | * | |
| Body material: 0.7043 (Ductile Gr. 60-40-18), 1.0619 (WCB), 1.4408 (CF8M) | | | | | | | | | | | | | | |
| Inlet | DIN EN 1092 | PN 10 | * | * | * | * | * | * | * | H44 | H44 | H44 | H44 | |
| | | PN 16 | * | * | * | * | * | * | * | H45 | H45 | H45 | H45 | |
| | | PN 25 | * | * | * | * | * | * | * | * | * | * | * | |
| | | PN 40 | * | * | * | * | * | * | * | * | * | * | * | |
| | ASME B16.5 | CL150 | H64 | H64 | H64 | H64 | H64 | H64 | H64 | H64 | H64 | [H64] | H64 | |
| | | CL300 | [H65] | [H65] | - | H65 | H65 | - | [H65] | [H65] | - | - | - | |
| Outlet | DIN EN 1092 | PN 10 | * | * | * | * | * | * | * | H50 | H50 | H50 | H50 | |
| | | PN 16 | * | * | * | * | * | * | * | H51 | H51 | H51 | H51 | |
| | | PN 25 | * | * | * | * | * | * | * | * | * | * | * | |
| | | PN 40 | * | * | * | * | * | * | * | * | * | * | * | |
| | ASME B16.5 | CL150 | H79 | H79 | H79 | H79 | H79 | H79 | H79 | H79 | H79 | [H79] | H79 | |
| | | CL300 | H80 | H80 | - | H80 | H80 | - | [H80] | [H80] | - | - | - | |

For an explanation of the characters and symbols, refer to page 00/07.
 Note: Flange drillings and facings always meet the requirements of the given flange standards.
 Flange thickness and outside diameter may deviate from the standard.

Flange facings

| Flange facings | | | | | | | | | | |
|--|------------------------|------------------|-----------------------------|---|-----------------|--------|----------------|-------------|----------------|-------------|
| Information | Standard | Inlet | Outlet | Remark | | | | | | |
| General | | | | | | | | | | |
| Flange, undrilled | – | H38 | H39 | | | | | | | |
| Linde-V-Nut, Form V48 | Linde Standard 420-08 | J07 | J08 | Groove: Rz = 16 | | | | | | |
| Linde-V-Nut, Form V48A | LWN 313.36 | J05 | J06 | Groove: Rz = 4, e.g. for hydrogen | | | | | | |
| Lens-shape seal form L (without lens-shape seal) | DIN 2696 LWN 313.35 | J11 | J12 | | | | | | | |
| According to DIN EN 1092 | | | | | | | | | | |
| Flange facings | | Inlet | Outlet | Remark | | | | | | |
| DIN EN 1092 (also see LWN 313.40) | | PN 10 – PN 40 | PN 10 – PN 40 | Rz specification acc. to DIN EN 1092 in µm | | | | | | |
| Sealing strip | Form B1 | * | * | Seal. strip.: Rz = 12.5 – 50 | | | | | | |
| | Form B2 | L36 | L38 | Seal. strip.: Rz = 3.2 – 12.5 | | | | | | |
| Tongue, Form C ¹⁾ | | H94 | H92 | only for steel flange | | | | | | |
| Groove, Form D ¹⁾ | | H93 | H91 | | | | | | | |
| Male, Form E | | H96 | H98 | | | | | | | |
| Female, Form F | | H97 | H99 | | | | | | | |
| O-ring Male, Form G | | J01 | J02 | | | | | | | |
| O-ring Female, Form H | | J03 | J04 | | | | | | | |
| According to ASME B16.5 | | | | | | | | | | |
| Body material | Inlet | Outlet | Smooth Finish ²⁾ | | Serrated Finish | | RTJ-Groove | | | |
| | | | Inlet | Outlet | Inlet | Outlet | Inlet | | Outlet | |
| | | | Option code | | Option code | | Pressure level | Option code | Pressure level | Option code |
| 0.7043 | all | all | L52 | L53 | * | * | – | – | – | – |
| 1.0619, 1.4408 | all | all | L52 | L53 | * | * | CL150 | H62 | CL150 | H63 |

¹⁾ LESER manufactures the groove at flanged valves by milling. If a customer demands a turned surface in the soil of the groove according to DIN EN 1092-1 an additional option code is necessary: "S01: soil of the groove drilled".

²⁾ Smooth Finish is not defined in the effective standards.

For signs and symbols refer to page 00/07

Note: Flange drillings and facings meet always the requirements of mentioned flange standards.
Flange thickness and outer diameter may vary from flange standard.

Order information – spare parts

Spare parts

| | | O-ring disc | | Metal disc | | | | |
|---|---|--------------------------------|---------------|---------------|----------------|---------------|---------------|---------------|
| | DN _i | 15 | 15 | 20 | 25 | 32 | 40 | 50 |
| | DN _o | 15 | 15 | 20 | 25 | 32 | 40 | 50 |
| | Actual orifice diameter d _o [mm] | 12 | 12 | 18 | 18 | 18 | 23 | 29 |
| | Actual orifice area A ₀ [mm ²] | 113 | 113 | 254 | 254 | 254 | 416 | 661 |
| Disc (item 7): Metal to metal seat | | Material-No. / Art.-No. | | | | | | |
| Disc | 1.4122 | – | 230.9339.9000 | 210.6939.9000 | 210.6939.9000 | 210.6939.9000 | 220.0139.9000 | 220.0239.9000 |
| Detachable lifting aid | 1.4404 | – | 230.9349.9000 | 210.6949.9000 | 210.6949.9000 | 210.6949.9000 | 220.0149.9000 | 220.0249.9000 |
| Disc (item 7): Soft seal | | Material-No. / Art.-No. | | | | | | |
| Disc | CR | “K” | 230.3049.9051 | – | 200.6049.9051 | 200.6049.9051 | 200.6049.9051 | 200.6149.9051 |
| | EPDM | “D” | 230.3049.9041 | – | 200.6049.9041 | 200.6049.9041 | 200.6049.9041 | 200.6149.9041 |
| | FKM | “L” | 230.3049.9071 | – | 200.60049.9071 | 200.6049.9071 | 200.6049.9071 | 200.6149.9071 |
| | FFKM | “C” | 230.3049.9091 | – | 200.60049.9091 | 200.6049.9091 | 200.6049.9091 | 200.6149.9091 |
| O-ring (item 7.4): Soft seal | | Material-No. / Art.-No. | | | | | | |
| O-Ring | CR | “K” | 502.0107.2651 | – | 502.0171.2651 | 502.0171.2651 | 502.0171.2651 | 502.0249.3351 |
| | EPDM | “D” | 502.0107.2641 | – | 502.0171.2641 | 502.0171.2641 | 502.0171.2641 | 502.0249.3341 |
| | FKM | “L” | 502.0107.2671 | – | 502.0171.2671 | 502.0171.2671 | 502.0171.2671 | 502.0249.3371 |
| | FFKM | “C” | 502.0107.2691 | – | 502.0171.2691 | 502.0171.2691 | 502.0171.2691 | 502.0249.3391 |
| Bellows (item 15): 1.4571 | | Material-No. / Art.-No. | | | | | | |
| Standard bellows | 400.7949.0000 | 400.7949.0000 | 400.0149.0000 | 400.0149.0000 | 400.0149.0000 | 400.0149.0000 | 400.0249.0000 | 400.0349.0000 |
| Conversion kit, standard¹⁾ | 5021.1030 | 5021.1030 | 5021.1034 | 5021.1034 | 5021.1034 | 5021.1034 | 5021.1035 | 5021.1036 |
| Low pressure bellows | – | 400.0149.0021 | 400.0149.0021 | 400.0149.0021 | 400.0149.0021 | 400.0149.0021 | 400.0249.0021 | 400.0349.0021 |
| Conversion kit low pressure¹⁾ | Please specify application conditions | | | | | | | |
| Gasket – body / bonnet (item 60) | | Material-No. / Art.-No. | | | | | | |
| Gasket | Graphite + 1.4401 | 500.0407.0000 | 500.0407.0000 | 500.0407.0000 | 500.0407.0000 | 500.0407.0000 | 500.0407.0000 | 500.0507.0000 |
| Option code L68 Gylon (PTFE compliance) | 500.0405.0000 | 500.0405.0000 | 500.0405.0000 | 500.0405.0000 | 500.0405.0000 | 500.0405.0000 | 500.0405.0000 | 500.0505.0000 |
| Ball (item 61): | | Material-No. / Art.-No. | | | | | | |
| Ball | Ball Ø [mm] | 6 | 6 | 6 | 6 | 6 | 6 | 6 |
| | 1.4401 | 510.0104.0000 | 510.0104.0000 | 510.0104.0000 | 510.0104.0000 | 510.0104.0000 | 510.0104.0000 | 510.0104.0000 |
| Split ring (item 14): | | Material-No. / Art.-No. | | | | | | |
| Split ring | Spindle Ø [mm] | 12 | 12 | 12 | 12 | 12 | 12 | 12 |
| | 1.4404 | 251.0149.0000 | 251.0149.0000 | 251.0149.0000 | 251.0149.0000 | 251.0149.0000 | 251.0149.0000 | 251.0149.0000 |
| Pin (item 57) | | Material-No. / Art.-No. | | | | | | |
| Pin | 1.4310 | 480.0505.0000 | 480.0505.0000 | 480.0505.0000 | 480.0505.0000 | 480.0505.0000 | 480.0505.0000 | 480.0705.0000 |
| O-ring damper | | Material-No. / Art.-No. | | | | | | |
| | Conversion kit H2 | 5021.1060 | 5021.1060 | – | 5021.1060 | 5021.1060 | 5021.1060 | 5021.1060 |
| | Conversion kit H4 | 5021.1064 | 5021.1064 | – | 5021.1064 | 5021.1064 | 5021.1064 | 5021.1064 |

¹⁾ Pressure range, refer to page 01/10 – 01/11

A conversion kit includes the following components:

| Item. | Components | No. |
|-------|-------------------------------------|------------------------------|
| 8 | Guide with bushing | 1 |
| 11 | Bonnet spacer | 1 |
| 12 | Spindle | 1 |
| 15 | Bellows | 1 |
| 55 | Stud | 4, 8 dependant on valve size |
| 60 | Gasket | 2, 3 dependant on valve size |
| | Installation instruction LWN 037.05 | 1 |

Refer to page 01/04

Order information – spare parts

| Spare parts | | | | | | | |
|---|---|---------------|---------------|--------------------------------|-----------------|-----------------|---------------|
| | DN _i | 65 | 80 | 100 | 125 | 150 | |
| | DN _o | 65 | 80 | 100 | 125 | 150 | |
| | Actual orifice diameter d _o [mm] | 37 | 46 | 60 | 74 | 92 | |
| | Actual orifice area A _o [mm ²] | 1075 | 1662 | 2827 | 4301 | 6648 | |
| Disc (item 7): Metal to metal seat | | | | Material-No. / Art.-No. | | | |
| Disc | 1.4122 | 220.0339.9000 | 210.9639.9000 | 220.2539.9000 | 220.2639.9000 | 220.2739.9000 | |
| Detachable lifting aid | 1.4404 | 220.0349.9000 | 210.9649.9000 | 220.2549.9000 | – | – | |
| Disc (item 7): Soft seal | | | | Material-No. / Art.-No. | | | |
| Disc | CR | "K" | 200.6349.9051 | 200.6449.9051 | 200.6549.9051 | 200.6649.9051 | – |
| | EPDM | "D" | 200.6349.9041 | 200.6449.9041 | 200.6549.9041 | 200.6649.9041 | 200.6749.9041 |
| | FKM | "L" | 200.6349.9071 | 200.6449.9071 | 200.6549.9071 | 200.6649.9071 | – |
| | FFKM | "C" | 200.6349.9091 | 200.6449.9091 | – | – | – |
| O-ring (item 7.4): Soft seal | | | | Material-No. / Art.-No. | | | |
| O-Ring | CR | "K" | 502.0408.3551 | 502.0503.3551 | 502.0660.5351 | 502.0819.5351 | – |
| | EPDM | "D" | 502.0408.3541 | 502.0503.3541 | 502.0660.5341 | 502.0819.5341 | 502.1041.5341 |
| | FKM | "L" | 502.0408.3571 | 502.0503.3571 | 502.0660.5371 | 502.0819.5371 | – |
| | FFKM | "C" | 502.0408.3591 | 502.0503.3591 | – | – | – |
| Bellows (item 15): 1.4571 | | | | Material-No. / Art.-No. | | | |
| Standard bellows | | 400.0149.0000 | 400.0549.0000 | 400.0649.0000 | 400.0749.0000 | 400.0849.0000 | |
| Conversion kit, standard¹⁾ | | 5021.1037 | 5021.1038 | 5021.1039 | Component parts | Component parts | |
| Low pressure bellows | | 400.0449.0021 | 400.0549.0021 | 400.0649.0021 | 400.1107 | 400.0849.0021 | |
| Conversion kit low pressure¹⁾ | Please specify application conditions | | | | – | – | |
| Gasket – body / bonnet (item 60) | | | | Material-No. / Art.-No. | | | |
| Gasket | Graphite + 1.4401 | 500.0907.0000 | 500.1007.0000 | 500.1507.0000 | 500.1807.0000 | 500.2107.0000 | |
| | Option code L68 Gylon (PTFE compliance) | 500.0905.0000 | 500.1005.0000 | 500.1505.0000 | 500.1805.0000 | 500.2105.0000 | |
| Ball (item 61): | | | | Material-No. / Art.-No. | | | |
| Ball | Ball Ø [mm] | 9 | 9 | 12 | 12 | 15 | |
| | 1.4404 | 510.0204.0000 | 510.0204.0000 | 510.0304.0000 | 510.0304.0000 | 510.0404.0000 | |
| Split ring (item 14): | | | | Material-No. / Art.-No. | | | |
| Split ring | Spindle Ø [mm] | 16 | 16 | 16 | 20 | 24 | |
| | 1.4404 | 251.0249.0000 | 251.0249.0000 | 251.0249.0000 | 251.0349.0000 | 251.0449.0000 | |
| Pin (item 57) | | | | Material-No. / Art.-No. | | | |
| Pin | 1.4310 | 480.0705.0000 | 480.0705.0000 | 480.1005.0000 | 480.1005.0000 | 480.1105.0000 | |
| O-ring damper | | | | Material-No. / Art.-No. | | | |
| | Conversion kit H2 | 5021.1061 | 5021.1061 | – | – | – | |
| | Conversion kit H4 | 5021.1065 | 5021.1065 | – | – | – | |

¹⁾ Pressure range, refer to page 01/10 – 01/11

A conversion kit includes the following components:

| Item. | Components | No. |
|-------|-------------------------------------|------------------------------|
| 8 | Guide with bushing | 1 |
| 11 | Bonnet spacer | 1 |
| 12 | Spindle | 1 |
| 15 | Bellows | 1 |
| 55 | Stud | 4, 8 dependant on valve size |
| 60 | Gasket | 2, 3 dependant on valve size |
| | Installation instruction LWN 037.05 | 1 |


Refer to page 01/04

Available options

For more information, also see
"Accessories and Options" as of page 99/01.


Heating jacket

H29, H30: Coupling G 3/8, G 3/4
H31, H32: Flange DN15, DN25




Drain hole

J18: G 1/4
J19: G 1/2




Open bonnet

See Art.-No.




O-ring disc

J20: FFKM "C"
J21: CR "K"
J22: EPDM "D"
J23: FKM "L"




Disc with sealing plate

J68: Open bonnet
J78: Closed bonnet




Balanced bellows

J68: Open bonnet
J78: Closed bonnet




Conversion kit for balanced bellows

Art.-No. see page 01/14



Screwed cap H2

H2




Plain lever H3

H3




Packed lever H4

H4




O-ring damper H2

J65




O-ring damper H4

J66




Lift indicator

J39: Adaptor H4
J93: Lift indicator



Test gag

J69: H4
J70: H4



Capacities – steam

Calculation of the capacity for saturated steam acc. to AD 2000-Merkblatt A2 with 10% overpressure.
Capacities at 1 bar and lower are calculated at 0.1 bar overpressure.

| Metric units | | AD 2000-Merkblatt A2 [kg/h] | | | | | | | | | | |
|---|-----------------|-----------------------------|------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | | O-ring disc | Metal disc | | | | | | | | | |
| DN _i | 15 | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 | 125 | 150 |
| DN _o | 15 | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 | 125 | 150 |
| Actual orifice diameter d _o [mm] | 12 | 12 | 18 | 18 | 18 | 23 | 29 | 37 | 46 | 60 | 74 | 92 |
| Actual orifice area A _o [mm ²] | 113 | 113 | 254 | 254 | 254 | 416 | 661 | 1075 | 1662 | 2827 | 4301 | 6648 |
| LEO _{S/G} ^{*)} [inch ²] | 0.106 | 0.111 | 0.117 | 0.154 | 0.154 | 0.251 | 0.399 | 0.650 | 1.004 | 1.708 | 2.598 | 4.016 |
| Set pressure [bar] | Capacity [kg/h] | | | | | | | | | | | |
| 0.2 | | | | 34 | 34 | 55 | 88 | 142 | 220 | 375 | 570 | 880 |
| 0.5 | 52 | 55 | 30 | 63 | 63 | 102 | 163 | 265 | 410 | 697 | 1060 | 1638 |
| 1 | 74 | 78 | 67 | 101 | 101 | 165 | 263 | 428 | 661 | 1125 | 1711 | 2645 |
| 2 | 118 | 125 | 129 | 170 | 170 | 278 | 442 | 720 | 1113 | 1893 | 2880 | 4452 |
| 3 | 161 | 168 | 177 | 232 | 232 | 379 | 603 | 981 | 1517 | 2581 | 3926 | 6068 |
| 4 | 200 | 210 | 221 | 290 | 290 | 473 | 752 | 1224 | 1892 | 3218 | 4895 | 7567 |
| 5 | | 251 | 265 | 347 | 347 | 566 | 900 | 1465 | 2265 | 3853 | 5861 | 9058 |
| 6 | | 293 | 308 | 404 | 404 | 659 | 1048 | 1706 | 2636 | 4485 | 6823 | 10545 |
| 7 | | 333 | 350 | 459 | 459 | 750 | 1192 | 1940 | 2999 | 5102 | 7761 | 11996 |
| 8 | | 374 | 394 | 516 | 516 | 842 | 1339 | 2179 | 3368 | 5730 | 8717 | 13473 |
| 9 | | 415 | 437 | 572 | 572 | 934 | 1485 | 2418 | 3737 | 6358 | 9671 | 14948 |
| 10 | | 456 | 480 | 629 | 629 | 1026 | 1632 | 2656 | 4105 | 6984 | 10624 | 16421 |
| 12 | | 538 | 566 | 741 | 741 | 1210 | 1924 | 3132 | 4842 | 8237 | 12530 | 19366 |
| 14 | | 618 | 650 | 852 | 852 | 1391 | 2211 | 3599 | 5563 | 9464 | 14395 | 22250 |
| 16 | | 699 | 736 | 964 | 964 | 1574 | 2503 | 4074 | 6297 | 10714 | 16296 | 25189 |
| 18 | | 781 | 822 | 1077 | 1077 | 1758 | 2795 | 4550 | 7033 | 11965 | 18200 | 28131 |
| 20 | | 863 | 908 | 1190 | 1190 | 1942 | 3088 | 5027 | 7770 | 13218 | 20107 | |
| 22 | | 942 | 991 | 1299 | 1299 | 2121 | 3372 | 5489 | 8484 | 14434 | 21956 | |
| 24 | | 1024 | 1078 | 1412 | 1412 | 2306 | 3665 | 5967 | 9222 | 15690 | 23866 | |
| 26 | | 1106 | 1164 | 1525 | 1525 | 2491 | 3959 | 6445 | 9962 | 16949 | | |
| 28 | | 1189 | 1251 | 1639 | 1639 | 2676 | 4254 | 6925 | 10704 | 18211 | | |
| 30 | | 1271 | 1338 | 1753 | 1753 | 2862 | 4550 | 7407 | 11449 | 19478 | | |
| 32 | | 1354 | 1425 | 1867 | 1867 | 3049 | 4847 | 7890 | 12195 | 20748 | | |
| 34 | | | | | | | | | | | | |
| 36 | | | | | | | | | | | | |
| 38 | | | | | | | | | | | | |
| 40 | | | | | | | | | | | | |

*) LEO_{S/G} = LESER Effective Orifice steam/gases please refer to page 00/11

"How to use" capacity tables, refer to page 00/09

Capacity table – air

Calculation of the capacity for air acc. to AD 2000-Merkblatt A2 with 10% overpressure.
Capacities at 1 bar and lower are calculated at 0.1 bar overpressure.

| Metric units | | AD 2000-Merkblatt A2 [m_n^3/h] | | | | | | | | | | | |
|--------------------|---|------------------------------------|------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | | O-ring disc | Metal disc | | | | | | | | | | |
| | DN _i | 15 | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 | 125 | 150 |
| | DN _o | 15 | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 | 125 | 150 |
| | Actual orifice diameter d ₀ [mm] | 12 | 12 | 18 | 18 | 18 | 23 | 29 | 37 | 46 | 60 | 74 | 92 |
| | Actual orifice area A ₀ [mm ²] | 113 | 113 | 254 | 254 | 254 | 416 | 661 | 1075 | 1662 | 2827 | 4301 | 6648 |
| | LEO _{SG} ^{*)} [inch ²] | 0.106 | 0.111 | 0.117 | 0.154 | 0.154 | 0.251 | 0.399 | 0.650 | 1.004 | 1.708 | 2.598 | 4.016 |
| Set pressure [bar] | | Capacity [m_n^3/h] | | | | | | | | | | | |
| 0.2 | | | | | 39 | 39 | 63 | 101 | 165 | 255 | 431 | 660 | 1019 |
| 0.5 | 64 | 67 | 35 | 74 | 74 | 120 | 191 | 311 | 481 | 819 | 1245 | 1925 | |
| 1 | 93 | 93 | 80 | 121 | 121 | 197 | 313 | 510 | 788 | 1341 | 2039 | 3152 | |
| 2 | 151 | 151 | 156 | 206 | 206 | 336 | 534 | 870 | 1344 | 2287 | 3478 | 5377 | |
| 3 | 206 | 206 | 217 | 284 | 284 | 463 | 737 | 1199 | 1854 | 3153 | 4797 | 7414 | |
| 4 | 246 | 258 | 272 | 356 | 356 | 582 | 925 | 1505 | 2327 | 3958 | 6021 | 9306 | |
| 5 | 296 | 311 | 327 | 429 | 429 | 700 | 1113 | 1811 | 2800 | 4763 | 7245 | 11198 | |
| 6 | 346 | 363 | 382 | 501 | 501 | 818 | 1301 | 2117 | 3273 | 5568 | 8469 | 13091 | |
| 7 | 396 | 416 | 438 | 574 | 574 | 936 | 1489 | 2423 | 3746 | 6373 | 9694 | 14983 | |
| 8 | 446 | 468 | 493 | 646 | 646 | 1055 | 1677 | 2729 | 4219 | 7177 | 10918 | 16875 | |
| 9 | 496 | 521 | 548 | 718 | 718 | 1173 | 1865 | 3035 | 4692 | 7982 | 12142 | 18767 | |
| 10 | 546 | 573 | 604 | 791 | 791 | 1291 | 2053 | 3342 | 5165 | 8787 | 13366 | 20659 | |
| 12 | 646 | 679 | 714 | 936 | 936 | 1528 | 2429 | 3954 | 6111 | 10397 | 15815 | 24444 | |
| 14 | 746 | 784 | 825 | 1081 | 1081 | 1764 | 2805 | 4566 | 7057 | 12006 | 18263 | 28228 | |
| 16 | 846 | 889 | 935 | 1225 | 1225 | 2001 | 3181 | 5178 | 8003 | 13616 | 20711 | 32013 | |
| 18 | 946 | 994 | 1046 | 1370 | 1370 | 2237 | 3557 | 5790 | 8949 | 15226 | 23160 | | |
| 20 | 1046 | 1099 | 1156 | 1515 | 1515 | 2474 | 3933 | 6402 | 9895 | 16835 | 25608 | | |
| 22 | 1146 | 1204 | 1267 | 1660 | 1660 | 2710 | 4309 | 7014 | 10842 | 18445 | 28057 | | |
| 24 | 1245 | 1309 | 1377 | 1805 | 1805 | 2947 | 4685 | 7626 | 11788 | 20055 | 30505 | | |
| 26 | 1345 | 1414 | 1488 | 1950 | 1950 | 3183 | 5061 | 8238 | 12734 | 21664 | 32954 | | |
| 28 | 1445 | 1519 | 1599 | 2095 | 2095 | 3420 | 5437 | 8851 | 13680 | 23274 | 35402 | | |
| 30 | 1545 | 1624 | 1709 | 2240 | 2240 | 3656 | 5813 | 9463 | 14626 | 24883 | 37850 | | |
| 32 | 1645 | 1729 | 1820 | 2384 | 2384 | 3893 | 6189 | 10075 | 15572 | | 40299 | | |
| 34 | 1745 | 1834 | 1930 | 2529 | 2529 | 4130 | 6565 | 10687 | 16518 | | | | |
| 36 | 1845 | 1939 | 2041 | 2674 | 2674 | 4366 | 6941 | 11299 | | | | | |
| 38 | 1945 | 2044 | 2151 | 2819 | 2819 | 4603 | 7317 | 11911 | | | | | |
| 40 | 2045 | 2149 | 2262 | 2964 | 2964 | 4839 | 7693 | 12523 | | | | | |

^{*)} LEO_{SG} = LESER Effective Orifice steam/gases please refer to page 00/11

"How to use" capacity tables, refer to page 00/09

Capacity table – water

Calculation of the capacity for water acc. to AD 2000-Merkblatt A2 with 10% overpressure at 20 °C.
Capacities at 1 bar and lower are calculated at 0.1 bar overpressure.

| Metric units | | AD 2000-Merkblatt A2 [10 ³ kg/h] | | | | | | | | | | | |
|---|---------------------------------|---|------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--|
| | | O-ring disc | Metal disc | | | | | | | | | | |
| DN _i | 15 | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 | 125 | 150 | |
| DN _o | 15 | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 | 125 | 150 | |
| Actual orifice diameter d ₀ [mm] | 12 | 12 | 18 | 18 | 18 | 23 | 29 | 37 | 46 | 60 | 74 | 92 | |
| Actual orifice area A ₀ [mm ²] | 113 | 113 | 254 | 254 | 254 | 416 | 661 | 1075 | 1662 | 2827 | 4301 | 6648 | |
| LEO _L *) [inch ²] | 0.127 | 0.129 | 0.115 | 0.152 | 0.152 | 0.248 | 0.394 | 0.641 | 0.991 | 1.686 | 2.564 | 3.963 | |
| Set pressure [bar] | Capacity [10 ³ kg/h] | | | | | | | | | | | | |
| 0.2 | | | | 1.77 | 1.77 | 2.89 | 4.60 | 7.50 | 11.6 | 19.7 | 30.0 | 46.3 | |
| 0.5 | 2.09 | 2.14 | 1.90 | 2.51 | 2.51 | 4.09 | 6.51 | 10.6 | 16.4 | 27.8 | 42.4 | 65.5 | |
| 1 | 2.84 | 2.90 | 2.58 | 3.39 | 3.39 | 5.54 | 8.81 | 14.3 | 22.2 | 37.7 | 57.4 | 88.7 | |
| 2 | 4.01 | 4.10 | 3.65 | 4.80 | 4.80 | 7.84 | 12.5 | 20.3 | 31.3 | 53.3 | 81.1 | 125 | |
| 3 | 4.91 | 5.02 | 4.47 | 5.88 | 5.88 | 9.60 | 15.3 | 24.8 | 38.4 | 65.3 | 99.3 | 154 | |
| 4 | 5.67 | 5.79 | 5.16 | 6.79 | 6.79 | 11.1 | 17.6 | 28.7 | 44.3 | 75.4 | 115 | 177 | |
| 5 | 6.34 | 6.48 | 5.77 | 7.59 | 7.59 | 12.4 | 19.7 | 32.1 | 49.6 | 84.3 | 128 | 198 | |
| 6 | 6.95 | 7.09 | 6.32 | 8.31 | 8.31 | 13.6 | 21.6 | 35.1 | 54.3 | 92.4 | 140 | 217 | |
| 7 | 7.50 | 7.66 | 6.82 | 8.98 | 8.98 | 14.7 | 23.3 | 37.9 | 58.6 | 99.8 | 152 | 235 | |
| 8 | 8.02 | 8.19 | 7.30 | 9.60 | 9.60 | 15.7 | 24.9 | 40.6 | 62.7 | 107 | 162 | 251 | |
| 9 | 8.51 | 8.69 | 7.74 | 10.2 | 10.2 | 16.6 | 26.4 | 43.0 | 66.5 | 113 | 172 | 266 | |
| 10 | 8.97 | 9.16 | 8.16 | 10.7 | 10.7 | 17.5 | 27.9 | 45.3 | 70.1 | 119 | 181 | 280 | |
| 12 | 9.82 | 10.0 | 8.93 | 11.8 | 11.8 | 19.2 | 30.5 | 49.7 | 76.8 | 131 | 199 | 307 | |
| 14 | 10.6 | 10.8 | 9.65 | 12.7 | 12.7 | 20.7 | 33.0 | 53.7 | 82.9 | 141 | 215 | 332 | |
| 16 | 11.3 | 11.6 | 10.3 | 13.6 | 13.6 | 22.2 | 35.2 | 57.4 | 88.7 | 151 | 229 | 355 | |
| 18 | 12.0 | 12.3 | 10.9 | 14.4 | 14.4 | 23.5 | 37.4 | 60.8 | 94.0 | 160 | 243 | | |
| 20 | 12.7 | 13.0 | 11.5 | 15.2 | 15.2 | 24.8 | 39.4 | 64.1 | 99.1 | 169 | 257 | | |
| 22 | 13.3 | 13.6 | 12.1 | 15.9 | 15.9 | 26.0 | 41.3 | 67.3 | 104 | 177 | 269 | | |
| 24 | 13.9 | 14.2 | 12.6 | 16.6 | 16.6 | 27.1 | 43.2 | 70.2 | 109 | 185 | 281 | | |
| 26 | 14.5 | 14.8 | 13.2 | 17.3 | 17.3 | 28.3 | 44.9 | 73.1 | 113 | 192 | 292 | | |
| 28 | 15.0 | 15.3 | 13.6 | 18.0 | 18.0 | 29.3 | 46.6 | 75.9 | 117 | 200 | 304 | | |
| 30 | 15.5 | 15.9 | 14.1 | 18.6 | 18.6 | 30.3 | 48.2 | 78.5 | 121 | 207 | 314 | | |
| 32 | 16.0 | 16.4 | 14.6 | 19.2 | 19.2 | 31.3 | 49.8 | 81.1 | 125 | | 324 | | |
| 34 | 16.5 | 16.9 | 15.0 | 19.8 | 19.8 | 32.3 | 51.4 | 83.6 | 129 | | | | |
| 36 | 17.0 | 17.4 | 15.5 | 20.4 | 20.4 | 33.2 | 52.9 | 86.0 | | | | | |
| 38 | 17.5 | 17.9 | 15.9 | 20.9 | 20.9 | 34.2 | 54.3 | 88.4 | | | | | |
| 40 | 17.9 | 18.3 | 16.3 | 21.5 | 21.5 | 35.0 | 55.7 | 90.7 | | | | | |

*) LEO_L = LESER Effective Orifice liquids, please refer to page 00/11

"How to use" capacity tables, refer to page 00/09

Determination of coefficient of discharge in case of lift restriction or back pressure

- h = Lift [mm]
- d₀ = Flow diameter [mm] of selected safety valve see "Article Numbers" table
- h/d₀ = Ratio of lift / flow diameter
- p_{a0} = Back pressure [bar_a]
- p₀ = Set pressure [bar_a]
- p_{a0}/p₀ = Ratio of back pressure / set pressure
- K_{dr} = Coefficient of discharge acc. to DIN EN ISO 4126-1
- α_w = Coefficient of discharge acc. to AD 2000-Merkblatt A2
- K_b = Back pressure correction factor acc. to API 520 Section 3.3

"How to use" refer to page 00/08

Diagram for evaluation of ratio of lift / flow diameter (h/d₀) in reference to the coefficient of discharge (K_{dr}/α_w)



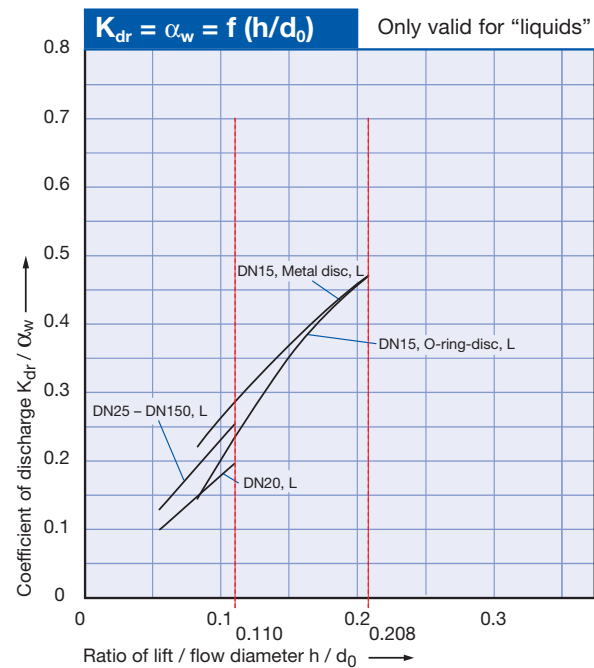


Diagram for evaluation of coefficient of discharge (K_{dr}/α_w) or K_b in reference to the ratio of back pressure / set pressure (p_{a0}/p₀)

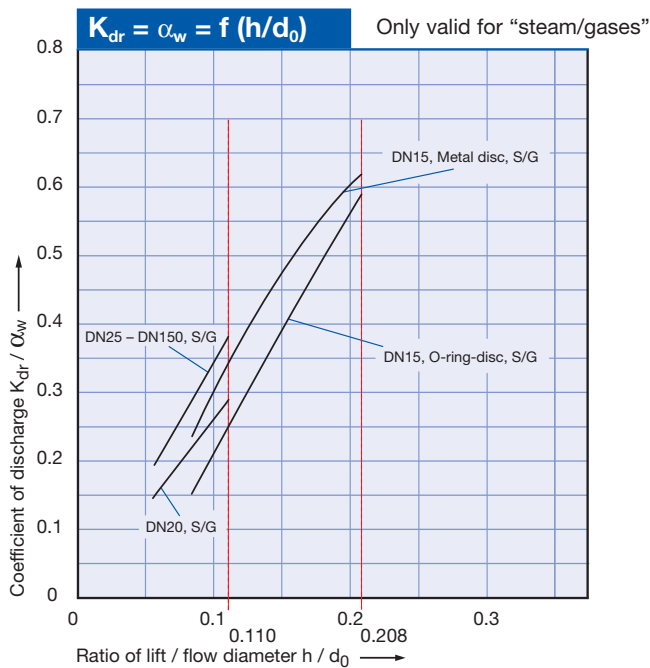

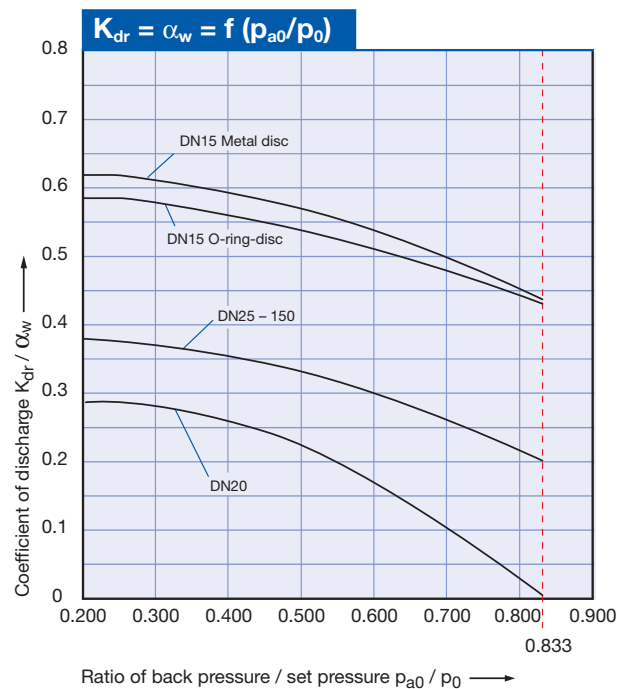

Type 431 PN 160
Packed lever H4
Open bonnet
Conventional design

Type 431, 433 PN 160

**Flanged Safety Relief Valves
- spring loaded**



Type 433 PN 160
Cap H2
Closed bonnet
Conventional design

Contents

Chapter/Page

Materials

- Conventional design 02/02
- Balanced bellows design 02/04

How to order

- Numbering system 02/06
- Article numbers 02/08

Pressure temperature ratings

- Metric units 02/09

Dimensions and weights

- Metric units 02/10

Flange drillings and Flange facings 02/11

Order information - spare parts 02/12

Available options 02/13

Approvals 02/14

Capacities


- Steam [Metric units] 02/15
- Air [Metric units] 02/15
- Water [Metric units] 02/15

Determination of 02/16

coefficient of discharge K_{dr}/α_w

Conventional design

Type 433 PN 160

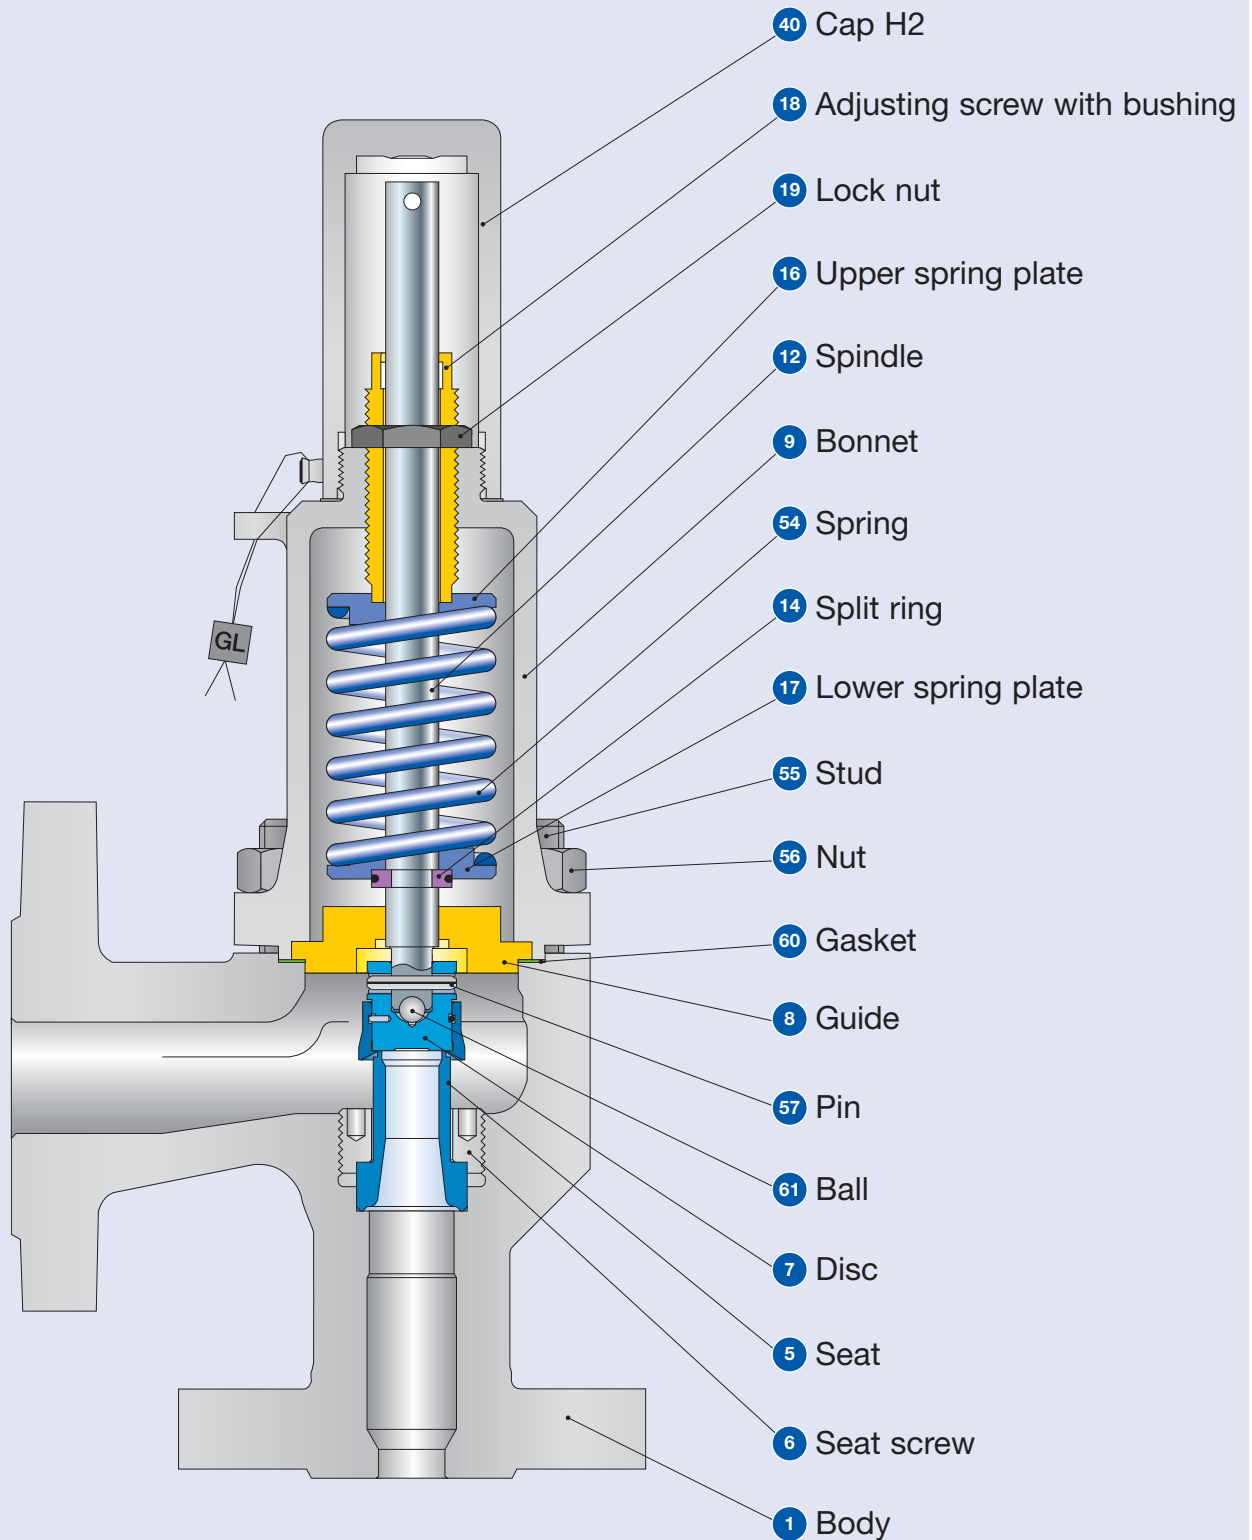

Conventional design


| Materials | | O-ring disc | Metal disc | O-ring disc | Metal disc |
|--------------|------------------------------|--------------------------|---------------------------|-------------------|-------------------|
| Item | Component | Type 4312 / 4332 | Type 4312 / 4332 | Type 4334 | Type 4334 |
| 1 | Body | 1.0619 | 1.0619 | 1.4408 | 1.4408 |
| | | SA 216 WCB | SA 216 WCB | SA 351 CF8M | SA 351 CF8M |
| 5 | Seat | 1.4404 | 1.4404 | 1.4404 | 1.4404 |
| | | 316L | 316L | 316L | 316L |
| 6 | Seat screw | 1.4404 | 1.4404 | 1.4404 | 1.4404 |
| | | 316L | 316L | 316L | 316L |
| 7 | Disc | 1.4404 | 1.4122 | 1.4404 | 1.4404 |
| | | 316L | Hardened stainless steel | 316L | 316L |
| 8 | Guide | 1.4104 tenifer | 1.4104, 1.0501, 1.0570 | 1.4404 | 1.4404 |
| | | Chrome steel tenifer | Chrome or stainless steel | 316L | 316L |
| 9 | Bonnet | 0.7040 | 0.7040 | 1.4408 | 1.4408 |
| | | Ductile Gr. 60-40-18 | Ductile Gr. 60-40-18 | SA 351 CF8M | SA 351 CF8M |
| 12 | Spindle | 1.4021 | 1.4021 | 1.4404 | 1.4404 |
| | | 420 | 420 | 316L | 316L |
| 14 | Split ring | 1.4104 | 1.4104 | 1.4404 | 1.4404 |
| | | Chrome steel | Chrome steel | 316L | 316L |
| 16/17 | Spring plate | 1.0718 | 1.0718 | 1.4404 | 1.4404 |
| | | Steel | Steel | 316L | 316L |
| 18 | Adjusting screw with bushing | 1.4104 PTFE | 1.4104 PTFE | 1.4404 PTFE | 1.4404 PTFE |
| | | Chrome steel PTFE | Chrome steel PTFE | 316L PTFE | 316L PTFE |
| 19 | Lock nut | 1.4104 | 1.4104 | 1.4404 | 1.4404 |
| | | Chrome steel | Chrome steel | 316L | 316L |
| 40 | Cap H2 | 1.0718 | 1.0718 | 1.4404 | 1.4404 |
| | | 12L13 | 12L13 | 316L | 316L |
| 54 | Spring, standard | 1.1200, 1.8159, 1.7102 | 1.1200, 1.8159, 1.7102 | 1.4310 | 1.4310 |
| | | Steel | Steel | Stainless steel | Stainless steel |
| | Spring, optional | 1.4310 | 1.4310 | - | - |
| 55 | Stud | 1.1181 | 1.1181 | 1.4401 | 1.4401 |
| | | Steel | Steel | B8M | B8M |
| 56 | Nut | 1.0501 | 1.0501 | 1.4401 | 1.4401 |
| | | 2H | 2H | 8M | 8M |
| 57 | Pin | 1.4310 | 1.4310 | 1.4310 | 1.4310 |
| | | Stainless steel | Stainless steel | Stainless steel | Stainless steel |
| 60 | Gasket | Graphite / 1.4401 | Graphite / 1.4401 | Graphite / 1.4401 | Graphite / 1.4401 |
| | | Graphite / 316 | Graphite / 316 | Graphite / 316 | Graphite / 316 |
| 61 | Ball | 1.3541 | 1.3541 | 1.4401 | 1.4401 |
| | | Hardened stainless steel | Hardened stainless steel | 316 | 316 |

Note:

- LESER reserves the right to make changes.
- If several materials are specified LESER defines the material.
- LESER may use higher quality materials without giving prior notice.
- Each component can be constructed of another material according to the customer's specification.
- All components exposed to pressure are highlighted in bold. The material will be specified according to DIN and ASTM here.

Balanced bellows design

Type 433 PN 160

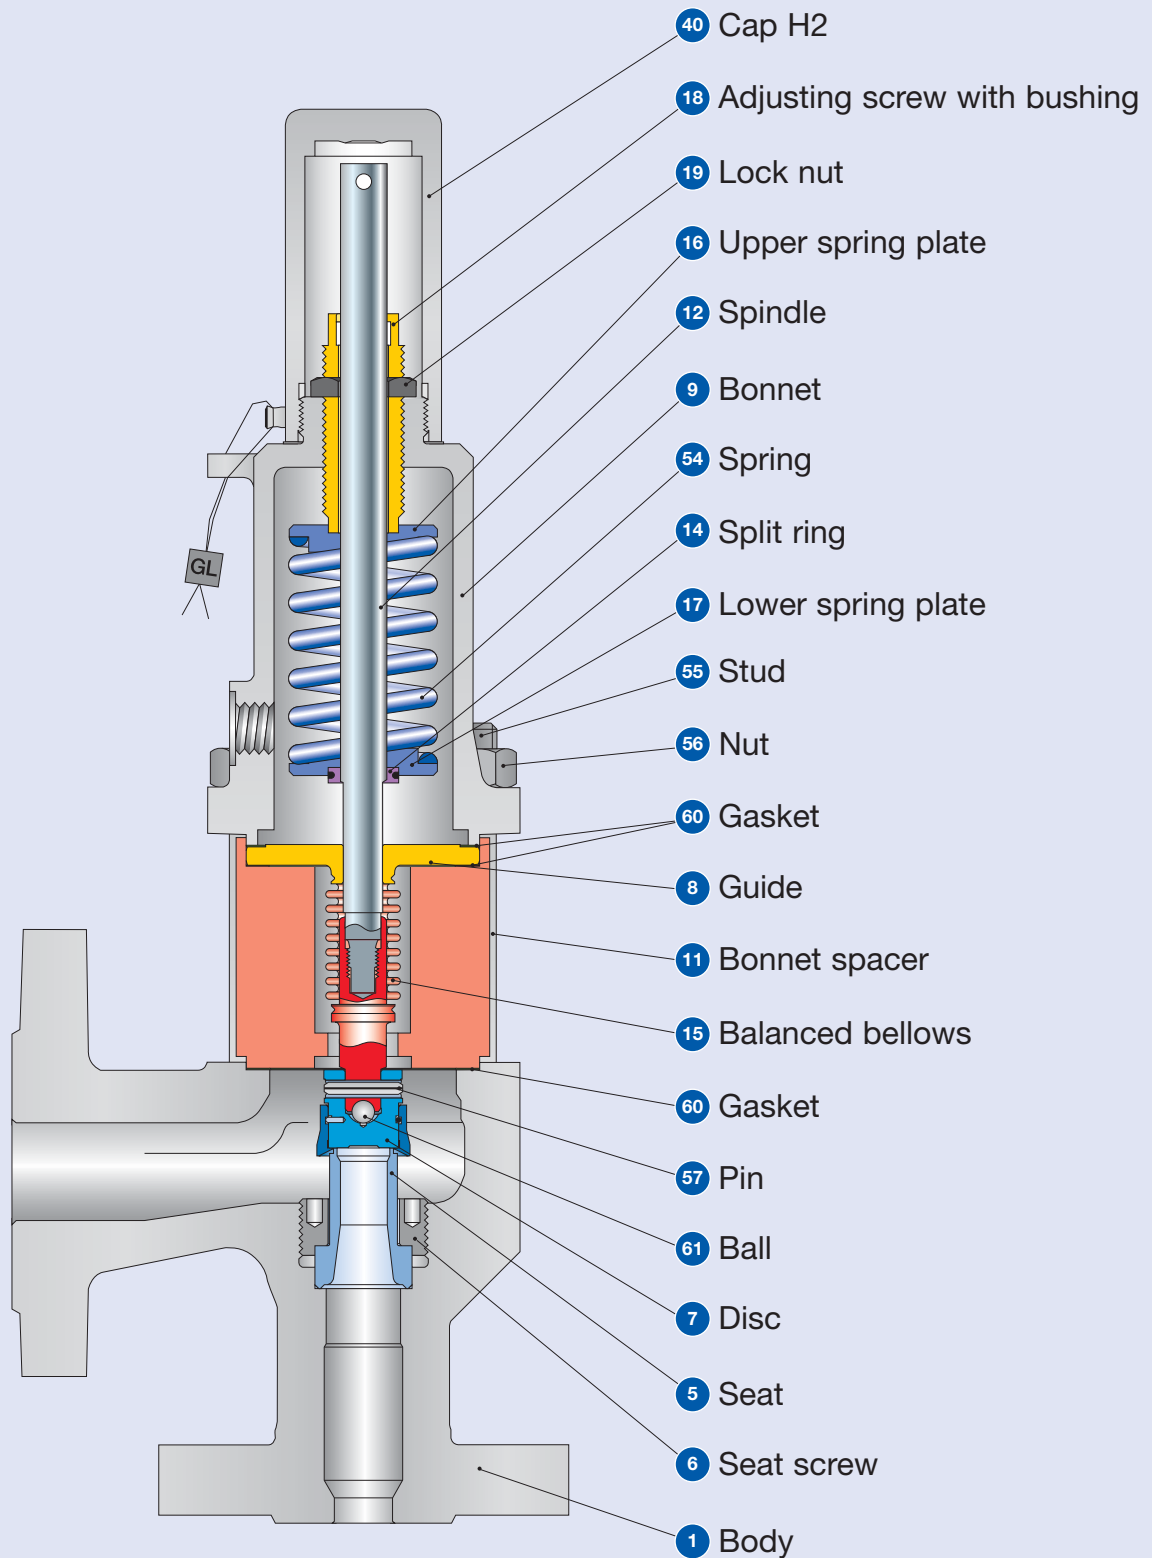

Balanced bellows design

| Materials | | O-ring disc | Metal disc | O-ring disc | Metal disc |
|--------------|--|--------------------------|--------------------------|-------------------|-------------------|
| Item | Component | Type 4312 / 4332 | Type 4312 / 4332 | Type 4334 | Type 4334 |
| 1 | Body | 1.0619 | 1.0619 | 1.4408 | 1.4408 |
| | | SA 216 WCB | SA 216 WCB | SA 351 CF8M | SA 351 CF8M |
| 5 | Seat | 1.4404 | 1.4404 | 1.4404 | 1.4404 |
| | | 316L | 316L | 316L | 316L |
| 6 | Seat screw | 1.4404 | 1.4404 | 1.4404 | 1.4404 |
| | | 316L | 316L | 316L | 316L |
| 7 | Disc | 1.4404 | 1.4122 | 1.4404 | 1.4404 |
| | | 316L | Hardened stainless steel | 316L | 316L |
| 8 | Guide Upper connection of balanced bellows | 1.4404 | 1.4404 | 1.4404 | 1.4404 |
| | | 316L | 316L | 316L | 316L |
| 9 | Bonnet | 0.7040 | 0.7040 | 1.4408 | 1.4408 |
| | | Ductile Gr. 60-40-18 | Ductile Gr. 60-40-18 | SA 351 CF8M | SA 351 CF8M |
| 11 | Bonnet spacer | 1.4404 | 1.4404 | 1.4404 | 1.4404 |
| | | 316L | 316L | 316L | 316L |
| 12 | Spindle | 1.4404 | 1.4404 | 1.4404 | 1.4404 |
| | | 316L | 316L | 316L | 316L |
| 14 | Split ring | 1.4104 | 1.4104 | 1.4404 | 1.4404 |
| | | Chrome steel | Chrome steel | 316L | 316L |
| 15 | Balanced bellows | 1.4571 | 1.4571 | 1.4571 | 1.4571 |
| | | 316Ti | 316Ti | 316Ti | 316Ti |
| 16/17 | Spring plate | 1.0718 | 1.0718 | 1.4404 | 1.4404 |
| | | Steel | Steel | 316L | 316L |
| 18 | Adjusting screw with bushing | 1.4104 PTFE | 1.4104 PTFE | 1.4404 PTFE | 1.4404 PTFE |
| | | Chrome steel PTFE | Chrome steel PTFE | 316L PTFE | 316L PTFE |
| 19 | Lock nut | 1.4104 | 1.4104 | 1.4404 | 1.4404 |
| | | Chrome steel | Chrome steel | 316L | 316L |
| 40 | Cap H2 | 1.0718 | 1.0718 | 1.4404 | 1.4404 |
| | | 12L13 | 12L13 | 316L | 316L |
| 54 | Spring, standard | 1.1200, 1.8159, 1.7102 | 1.1200, 1.8159, 1.7102 | 1.4310 | 1.4310 |
| | Spring, optional | Steel | Steel | Stainless steel | Stainless steel |
| 55 | Stud | 1.4310 | 1.4310 | – | – |
| | | Stainless steel | Stainless steel | – | – |
| 55 | Stud | 1.4401 | 1.4401 | 1.4401 | 1.4401 |
| | | 8M | 8M | B8M | B8M |
| 56 | Hex nut | 1.4401 | 1.4401 | 1.4401 | 1.4401 |
| | | 8M | 8M | B8M | B8M |
| 57 | Roll pin | 1.4310 | 1.4310 | 1.4310 | 1.4310 |
| | | Stainless steel | Stainless steel | Stainless steel | Stainless steel |
| 60 | Gasket | Graphite / 1.4401 | Graphite / 1.4401 | Graphite / 1.4401 | Graphite / 1.4401 |
| | | Graphite / 316 | Graphite / 316 | Graphite / 316 | Graphite / 316 |
| 61 | Ball | 1.3541 | 1.3541 | 1.4401 | 1.4401 |
| | | Hardened stainless steel | Hardened stainless steel | 316 | 316 |

Note:

- LESER reserves the right to make changes.
- If several materials are specified LESER defines the material.
- LESER may use higher quality materials without giving prior notice.
- Each component can be constructed of another material according to the customer's specification.
- All components exposed to pressure are highlighted in bold. The material will be specified according to DIN and ASTM here.

How to order – Example for numbering system – Type 433 PN 160

1

Article Number

4332.8552

2

Set Pressure

60 bar

3

Connections

H47

| | | | |
|-----|---|-----|---|
| 1 | 2 | 3 | 4 |
| 433 | 2 | 855 | 2 |

1 Valve type 431, 433 PN 160
 Type 433 – with closed bonnet
 Type 431 – with open bonnet

2 Material code

| Code | Body material |
|------|---------------|
| 2 | 1.0619 (WCB) |
| 4 | 1.4408 (CF8M) |

3 Valve code
 Automatically determines nominal diameter and body material (see page 02/08).

4

| Code | Lifting device | |
|------|------------------------------|----|
| 2 | Gas-tight cap | H2 |
| 3 | Plain lever | H3 |
| 4 | Packed lever | H4 |
| 5 | Plain lever with open bonnet | H3 |

Please enter the units (in gauge)!

The specified pressure range may not be exceeded!

Please refer to page 02/11.

Type 433 PN 160

4 Options

J22

| Type 431, 433 PN 160 | Option code |
|----------------------------------|-------------|
| • O-ring disc | |
| CR "K" | J21 |
| EPDM "D" | J22 |
| FKM "L" | J23 |
| FFKM "C" | J20 |
| • Disc 1.4404 / 316L | L44 |
| • Disc 1.4404 / 316L stellited | J25 |
| • Detachable lifting aid | J26 |
| • Balanced bellows | |
| - Bonnet, open (Type 431) | J68 |
| - Bonnet, closed (Type 433) | J78 |
| • High temperature alloy spring | X01 |
| • Stainless steel spring | X04 |
| • Adaptor for lift indicator H4 | J39 |
| • Lift indicator | J93 |
| • Test gag | |
| - Cap H2 | J70 |
| - Packed lever H4 | J69 |
| • Heating jacket | |
| - Couplings G 3/8 | H29 |
| G 3/4 | H30 |
| - Flange DN 15 | H31 |
| DN 25 | H32 |
| • Heating jacket - Bonnet spacer | H33 |
| • Drain hole G 1/4 | J18 |
| G 1/2 | J19 |
| • Oil and grease free | J85 |
| • Materials | |
| - NACE | N78 |

Option code applies only if not standard

5 Documentation

H01 L30

Please select the necessary documentation:

| Tests, Certifications: | Option code |
|--|--------------------|
| DIN EN 10204-3.2: TÜV-Nord Certification for set pressure | M33 |
| LESER CGA (Certificate for Global Application) | H03 |
| - Acceptance test certificate 3.1 acc. to DIN EN 10204 | |
| - Declaration of conformity as per pressure equipment directive PED 97/23/EC | |
| Material quality certificate: | |
| DIN EN 10204-3.1 | |
| Component | Option code |
| Body | H01 |
| Nozzle | L59 |
| Bonnet | L30 |
| Disc | L23 |
| Screws | N07 |
| Nuts | N08 |

6 Code and Medium

2.0


| | |
|---|---|
| 1 | 2 |
| 2 | 0 |
| 1 Code | |
| 2. CE / VdTUEV | |
| 3. ASME Section VIII + CE / VdTUEV | |
| 2 Medium | |
| .0 steam / gases / liquids (only valid for CE / VdTUEV) | |

Type 433 PN 160


How to order – article numbers

Article numbers


| | | O-ring disc | Metal disc |
|-------------------------------------|--|-------------|------------|
| | DN _i | 15 | 15 |
| | DN _o | 25 | 25 |
| | Actual orifice diameter d _o [mm] | 12 | 12 |
| | Actual orifice area A ₀ [mm ²] | 113 | 113 |
| Body material: 1.0619 (WCB) | | | |
| Bonnet closed | H2 Art.-No. 4332. | 8572 | 8552 |
| | H3 Art.-No. 4332. | 8573 | 8553 |
| | H4 Art.-No. 4332. | 8574 | 8554 |
| open | H3 Art.-No. 4312. | 8575 | 8555 |
| Body material: 1.4408 (CF8M) | | | |
| Bonnet closed | H2 Art.-No. 4334. | 8582 | 8562 |
| | H4 Art.-No. 4334. | 8584 | 8564 |

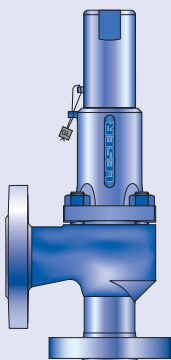


Type 433 PN 160
Cap H2
Closed bonnet
Conventional design




Type 433 PN 160
Packed lever H4
Closed bonnet
Conventional design

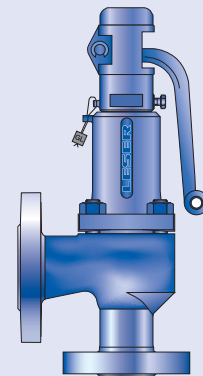

Type 433 PN 160
Plain lever H3
Closed bonnet
Conventional design



Type 431 PN 160
Plain lever H3
Open bonnet
Conventional design



Type 431 PN 160
Plain lever H3
Closed bonnet
Balanced bellows design

Pressure temperature ratings

| Metric units | | | | | | |
|--|--|---------------|-------------|-----|------------|-----|
| | | | O-ring disc | | Metal disc | |
| | DN _i | | 15 | | 15 | |
| | DN _o | | 25 | | 25 | |
| | Actual orifice diameter d ₀ [mm] | | 12 | | 12 | |
| | Actual orifice area A ₀ [mm ²] | | 113 | | 113 | |
| Body material: 1.0619 (WCB) | | | | | | |
| DIN flange | Inlet | PN 160 | | | | |
| | Outlet | PN 40 | | | | |
| Minimum set pressure | p [bar _g] S/G/L | 0.3 | | | 0.3 | |
| Min. set pressure¹⁾ standard bellows | p [bar _g] S/G/L | 3 | | | 3 | |
| Maximum set pressure | p [bar _g] S/G/L | "K" | | | | |
| | | "D" | 142 | "C" | 85 | 144 |
| | | "L" | | | | |
| Max. set pressure with special spring | p [bar _g] S/G/L | "K" | | | | |
| | | "D" | 160 | "C" | 85 | 160 |
| | | "L" | | | | |
| Temperature²⁾ acc. to DIN EN | min. [°C] | -45 | | | -60 | |
| | max. [°C] | +150 | | | +450 | |
| Body material: 1.4408 (CF8M) | | | | | | |
| DIN flange | Inlet | PN 160 | | | | |
| | Outlet | PN 40 | | | | |
| Minimum set pressure | p [bar _g] S/G/L | 0.3 | | | 0.3 | |
| Min. set pressure¹⁾ standard bellows | p [bar _g] S/G/L | 3 | | | 3 | |
| Max. set pressure | p [bar _g] S/G/L | 85 | | | 85 | |
| Max. set pressure with special spring | p [bar _g] S/G/L | "K" | | | | |
| | | "D" | 150 | "C" | 85 | 160 |
| | | "L" | | | | |
| Temperature²⁾ acc. to DIN EN | min. [°C] | -45 | | | -270 | |
| | max. [°C] | +150 | | | +400 | |


¹⁾ Min. set pressure of standard bellows = max. set pressure of bellows for low set pressure.

²⁾ The temperature is limited by the soft seal material (see page 99/10). The values given here are valid for EPDM. Between -10°C and the lowest specified application temperature, proceed as per AD 2000-Merkblatt W10.


Dimensions and weights

| Metric units | | |
|-------------------------------------|--|--------|
| | DN _i | 15 |
| | DN _o | 25 |
| | Actual orifice diameter d ₀ [mm] | 12 |
| | Actual orifice area A ₀ [mm ²] | 113 |
| Weight | | |
| [kg] | | 7 |
| | with bellows | 8.4 |
| Centre to face | | |
| [mm] | Inlet a | 90 |
| | Outlet b | 90 |
| Height (H4) | | |
| [mm] | Standard H max. | 307 |
| | Bellows H max. | 359 |
| Body material: 1.0619 (WCB) | | |
| DIN flange¹⁾ | Inlet | PN 160 |
| | Outlet | PN 40 |
| Body material: 1.4408 (CF8M) | | |
| DIN flange¹⁾ | Inlet | PN 160 |
| | Outlet | PN 40 |

¹⁾ Standard flange class. For other flange drillings, see page 02/11.

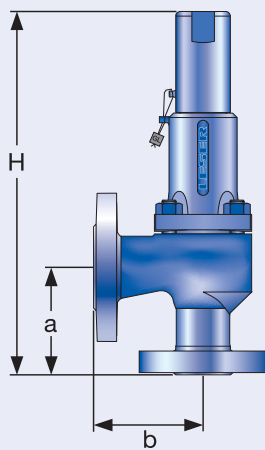

Conventional design

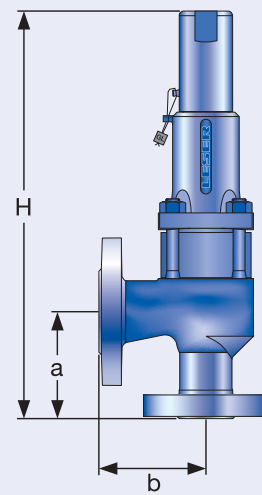

Balanced bellows design

Flange drillings and facings

| Flange drillings | | | |
|--|--------------------------|--------|-----|
| DN _i | 15 | | |
| DN _o | 25 | | |
| Valve size | 1/2" x 1" | | |
| Actual orifice diameter d _o [mm] | 12 | | |
| Actual orifice area A _o [mm ²] | 113 | | |
| Body material: 1.0619 (WCB), 1.4408 (CF8M) | | | |
| Inlet | DIN EN 1092 | PN 16 | H47 |
| | | PN 40 | H47 |
| | | PN 63 | * |
| | | PN 160 | * |
| | ASME B 16.5 | CL300 | H65 |
| | | CL600 | H67 |
| Outlet | DIN EN 1092 | PN 16 | * |
| | | PN 40 | * |
| | ASME B16.5 ¹⁾ | CL150 | H79 |
| | | CL300 | H80 |

| Flange facings | | | | | | | | | | |
|---|------------------------|-------------------|-----------------------------|---|-----------------|--------|----------------|-------------|----------------|-------------|
| Information | Standard | Inlet | Outlet | Remark | | | | | | |
| General | | | | | | | | | | |
| Flange, undrilled | – | H38 | H39 | | | | | | | |
| Linde-V-Nut, Form V48 | Linde Standard 420-08 | J07 | J08 | Groove: Rz = 16 | | | | | | |
| Linde-V-Nut, Form V48A | LWN 313.36 | J05 | J06 | Groove: Rz = 4, e.g. for hydrogen | | | | | | |
| Lens-shape seal form L (without lens-shape seal) | DIN 2696 LWN 313.35 | J11 | J12 | | | | | | | |
| According to DIN EN 1092 | | | | | | | | | | |
| Flange facings | | Inlet | Outlet | Remark | | | | | | |
| DIN EN 1092 (also see LWN 313.40) | | PN 63 – PN 160 | PN 40 | Rz specification acc. to DIN EN 1092 in µm | | | | | | |
| Sealing strip | Form B1 | – | * | Seal. strip.: Rz = 12.5 – 50 | | | | | | |
| | Form B2 | * | L38 | Seal. strip.: Rz = 3.2 – 12.5 | | | | | | |
| Tongue, Form C ¹⁾ | | H94 | H92 | only for steel flange | | | | | | |
| Groove, Form D ¹⁾ | | H93 | H91 | | | | | | | |
| Male, Form E | | H96 | H98 | | | | | | | |
| Female, Form F | | H97 | H99 | | | | | | | |
| O-ring Male, Form G | | J01 | J02 | | | | | | | |
| O-ring Female, Form H | | J03 | J04 | | | | | | | |
| According to ASME B16.5 | | | | | | | | | | |
| Body material | Inlet | Outlet | Smooth Finish ²⁾ | | Serrated Finish | | RTJ-Groove | | | |
| | | | Inlet | Outlet | Inlet | Outlet | Inlet | | Outlet | |
| | | | Option code | | Option code | | Pressure level | Option code | Pressure level | Option code |
| 1.0619, 1.4408 | all | all | L52 | L53 | * | * | CL150 | H62 | CL150 | H63 |

¹⁾ LESER manufactures the groove at flanged valves by milling. If a customer demands a turned surface in the soil of the groove according to DIN EN 1092-1 an additional option code is necessary: "S01: soil of the groove drilled".

²⁾ Smooth Finish is not defined in the effective standards.

For signs and symbols refer to page 00/07
 Note: Flange drillings and facings meet always the requirements of mentioned flange standards.
 Flange thickness and outer diameter may vary from flange standard.

Order information – spare parts

Spare parts













| | | O-ring disc | Metal disc |
|---|---|---------------------------------------|---------------|
| | DN _i | 15 | 15 |
| | DN _o | 25 | 25 |
| | Actual orifice diameter d ₀ [mm] | 12 | 12 |
| | Actual orifice area A ₀ [mm ²] | 113 | 113 |
| Disc (item 7): Metal seat | | Material-No. / Art.-No. | |
| Disc | 1.4122 | – | 230.9339.9000 |
| Detachable lifting aid | 1.4404 | – | 230.9349.9000 |
| Disc (item 7): Soft seal | | Material-No. / Art.-No. | |
| Disc | CR “K” | 230.2949.9053 | – |
| | EPDM “D” | 230.2949.9042 | – |
| | FKM “L” | 230.2949.9073 | – |
| | FFKM “C” | 230.2949.9091 | – |
| O-ring (item 7.4): Soft seal | | Material-No. / Art.-No. | |
| O-Ring | CR “K” | 502.0107.2653 | – |
| | EPDM “D” | 502.0107.2642 | – |
| | FKM “L” | 502.0107.2673 | – |
| | FFKM “C” | 502.0107.2691 | – |
| Bellows (item 15): 1.4571 | | Material-No. / Art.-No. | |
| Standard bellows | | 400.6349.0000 | 400.6349.0000 |
| Conversion kit, standard¹⁾ | | Please specify application conditions | |
| Low pressure bellows | | – | – |
| Conversion kit low pressure¹⁾ | | – | – |
| Gasket – body / bonnet (item 60) | | Material-No. / Art.-No. | |
| Gasket | Graphite + 1.4401 | 500.0407.0000 | 500.0407.0000 |
| Option code L68 Gylon (PTFE compliance) | | 500.0405.0000 | 500.0405.0000 |
| Ball (item 61): | | Material-No. / Art.-No. | |
| Ball | Ball Ø [mm] | 6 | 6 |
| | 1.4404 | 510.0104.0000 | 510.0104.0000 |
| Split ring (item 14): | | Material-No. / Art.-No. | |
| Split ring | Spindle Ø [mm] | 12 | 12 |
| | 1.4404 | 251.0149.0000 | 251.0149.0000 |
| Pin (item 57) | | Material-No. / Art.-No. | |
| Pin | 1.4310 | 480.0505.0000 | 480.0505.0000 |
| O-ring damper | | Material-No. / Art.-No. | |
| | Conversion kit H2 | 5021.1060 | 5021.1060 |
| | Conversion kit H4 | 5021.1064 | 5021.1064 |

| Item. | Components | No. |
|-------|---|-----|
| 8 | Guide; upper connection of balanced bellows | 1 |
| 11 | Bonnet spacer | 1 |
| 12 | Spindle | 1 |
| 15 | Bellows | 1 |
| 55 | Stud | 4 |
| 60 | Gasket | 2 |
| | Instruction guide LWN 037.05 | 1 |

Refer to page page 02/04

Available options

For more information, also see
"Accessories and Options" as of page 99/01.

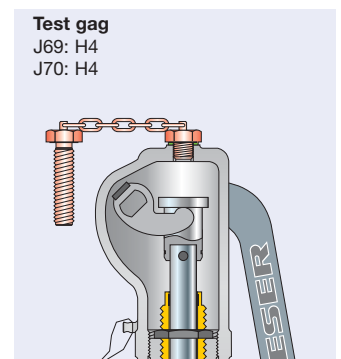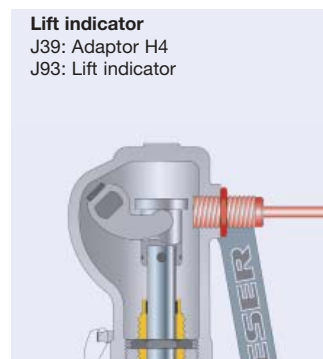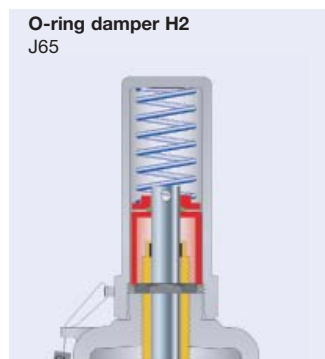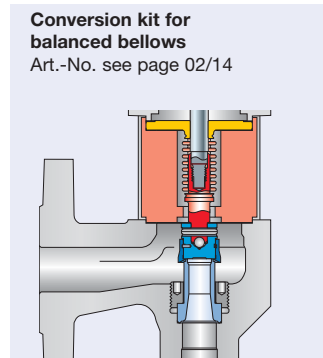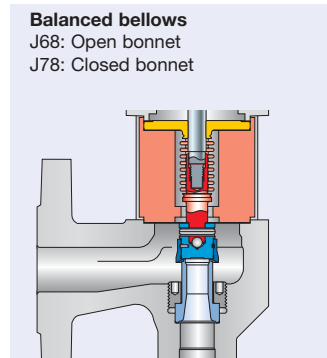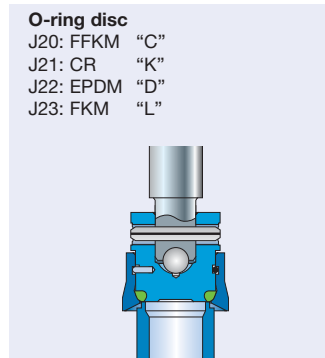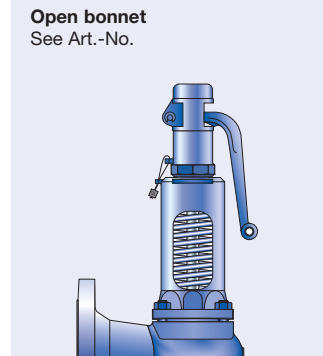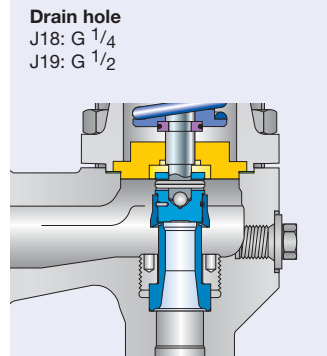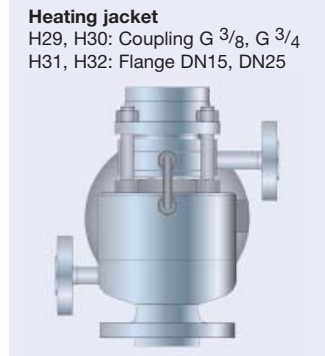

Approvals

| Approvals | | O-ring disc | Metal disc |
|---|---|---|------------|
| | DN _i | 15 | 15 |
| | DN _o | 25 | 25 |
| | Actual orifice diameter d ₀ [mm] | 12 | 12 |
| | Actual orifice area A ₀ [mm ²] | 113 | 113 |
| Europe | | Coefficient of discharge K_{dr} | |
| PED / DIN EN ISO 4126-1 | Approval-No. | 072020111Z0008/0/06 | |
| | S/G | 0.59 | 0.62 |
| | L | 0.47 | 0.48 |
| Germany | | Coefficient of discharge α_w | |
| PED / AD 2000-Merkblatt A2 Standard safety valve | Approval-No. | TÜV SV 577 | |
| | S/G | 0.59 | 0.62 |
| | L | 0.47 | 0.48 |
| China | | Coefficient of discharge K | |
| AQSIQ | Approval-No. | For current Approval-No. see www.leser.com | |
| | S/G | 0.59 | 0.62 |
| | L | 0.47 | 0.48 |
| Russia | | Coefficient of discharge K | |
| TR/ RTN | Approval-No. | For current Approval-No. see www.leser.com | |
| | S/G | 0.59 | 0.62 |
| | L | 0.47 | 0.48 |
| Kazakhstan | | Coefficient of discharge α_w | |
| GOST-K | Approval-No. | For current Approval-No. see www.leser.com | |
| | S/G | 0.59 | 0.62 |
| | L | 0.47 | 0.48 |
| Belarus | | Coefficient of discharge α_w | |
| GOSPROMNAZADOR | Approval-No. | For current Approval-No. see www.leser.com | |
| | S/G | 0.59 | 0.62 |
| | L | 0.47 | 0.48 |

| Classification societies | Homepage | |
|-----------------------------|----------|--|
| Bureau Veritas | BV | www.bureauveritas.com |
| ClassNK NIPPON Kaiji Kyokai | NK | www.classnk.or.jp |
| Det Norske Veritas | DNV | www.dnv.com |
| Germanischer Lloyd | GL | www.gl-group.com |
| Lloyd's Register EMEA | LREMEA | www.lr.org |
| Registro Italiano Navale | RINA | www.rina.org |

The valid Approval-No. changes with each renewal of the approval.

For a sample certificate including the valid certification number see www.leser.com

Capacities

Calculation of the capacity for steam, gases, and liquids acc. to AD 2000-Merkblatt A2 with 10% overpressure.
Capacities at 1 bar and lower are calculated at 0.1 bar overpressure.

| Metric units | | AD 2000-Merkblatt A2 | | | | | |
|--|--|---------------------------|------------|---|------------|---|------------|
| | | O-ring disc | Metal disc | O-ring disc | Metal disc | O-ring disc | Metal disc |
| DN | | 15 | 15 | 15 | 15 | 15 | 15 |
| DN ₀ | | 25 | 25 | 25 | 25 | 25 | 25 |
| Actual orifice diameter d ₀ [mm] | | 12 | 12 | 12 | 12 | 12 | 12 |
| Actual orifice area A ₀ [mm ²] | | 113 | 113 | 113 | 113 | 113 | 113 |
| LEO _{S/G/L} ^{*)} [inch ²] | | 0.106 | 0.111 | 0.106 | 0.111 | 0.127 | 0.129 |
| Set pressure | | Capacities | | Capacities | | Capacities | |
| [bar] | | Steam saturated [kg/h] | | Air 0°C and 1013 mbar [m ³ /h] | | Water 20°C [10 ³ kg/h] | |
| 0.2 | | | | | | | |
| 0.5 | | 52 | 55 | 64 | 67 | 2.09 | 2.14 |
| 1 | | 74 | 78 | 93 | 93 | 2.84 | 2.90 |
| 2 | | 118 | 125 | 151 | 151 | 4.01 | 4.10 |
| 3 | | 161 | 168 | 206 | 206 | 4.91 | 5.02 |
| 4 | | 200 | 210 | 246 | 258 | 5.67 | 5.79 |
| 5 | | | 251 | 296 | 311 | 6.34 | 6.48 |
| 6 | | | 293 | 346 | 363 | 6.95 | 7.09 |
| 7 | | | 333 | 396 | 416 | 7.50 | 7.66 |
| 8 | | | 374 | 446 | 468 | 8.02 | 8.19 |
| 9 | | | 415 | 496 | 521 | 8.51 | 8.69 |
| 10 | | | 456 | 546 | 573 | 8.97 | 9.16 |
| 12 | | | 538 | 646 | 679 | 9.82 | 10.0 |
| 14 | | | 618 | 746 | 784 | 10.6 | 10.8 |
| 16 | | | 699 | 846 | 889 | 11.3 | 11.6 |
| 18 | | | 781 | 946 | 994 | 12.0 | 12.3 |
| 20 | | | 863 | 1046 | 1099 | 12.7 | 13.0 |
| 22 | | | 942 | 1146 | 1204 | 13.3 | 13.6 |
| 24 | | | 1024 | 1245 | 1309 | 13.9 | 14.2 |
| 26 | | | 1106 | 1345 | 1414 | 14.5 | 14.8 |
| 28 | | | 1189 | 1445 | 1519 | 15.0 | 15.3 |
| 30 | | | 1271 | 1545 | 1624 | 15.5 | 15.9 |
| 32 | | | 1354 | 1645 | 1729 | 16.0 | 16.4 |
| 34 | | | 1433 | 1745 | 1834 | 16.5 | 16.9 |
| 36 | | | 1517 | 1845 | 1939 | 17.0 | 17.4 |
| 38 | | | 1600 | 1945 | 2044 | 17.5 | 17.9 |
| 40 | | | 1684 | 2045 | 2149 | 17.9 | 18.3 |
| 50 | | | 2109 | 2545 | 2674 | 20.1 | 20.5 |
| 60 | | | 2537 | 3045 | 3200 | 22.0 | 22.4 |
| 70 | | | 2981 | 3545 | 3725 | 23.7 | 24.2 |
| 80 | | | 3430 | 4045 | 4250 | 25.4 | 25.9 |
| 90 | | | 3901 | 4544 | 4775 | 26.9 | 27.5 |
| 100 | | | | 5044 | 5301 | 28.4 | 29.0 |
| 120 | | | | 6044 | 6351 | 31.1 | 31.7 |
| 140 | | | | 7044 | 7402 | 33.6 | 34.3 |
| 160 | | | | 8043 | 8452 | 35.9 | 36.6 |

*) LEO_{S/G/L} = LESER Effective Orifice for steam, gases, and liquids, please refer to page 00/11
"How to use" capacity tables, refer to page 00/09

Determination of coefficient of discharge in case of lift restriction or back pressure

- h = Lift [mm]
- d_0 = Flow diameter [mm] of selected safety valve see "Article Numbers" table
- h/d_0 = Ratio of lift / flow diameter
- p_{a0} = Back pressure [bar_a]
- p_0 = Set pressure [bar_a]
- p_{a0}/p_0 = Ratio of back pressure / set pressure
- K_{dr} = Coefficient of discharge acc. to DIN EN ISO 4126-1
- α_w = Coefficient of discharge acc. to AD 2000-Merkblatt A2
- K_b = Back pressure correction factor acc. to API 520 Section 3.3

Diagram for evaluation of ratio of lift / flow diameter (h/d_0) in reference to the coefficient of discharge K_{dr}/α_w

"How to use" refer to page 00/08



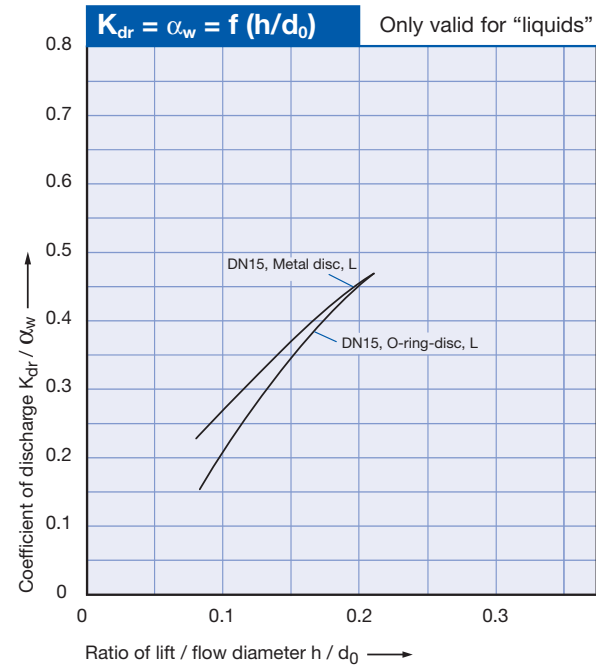


Diagram for evaluation of coefficient of discharge (K_{dr}/α_w) or K_b in reference to the ratio of back pressure / set pressure (p_{a0}/p_0)

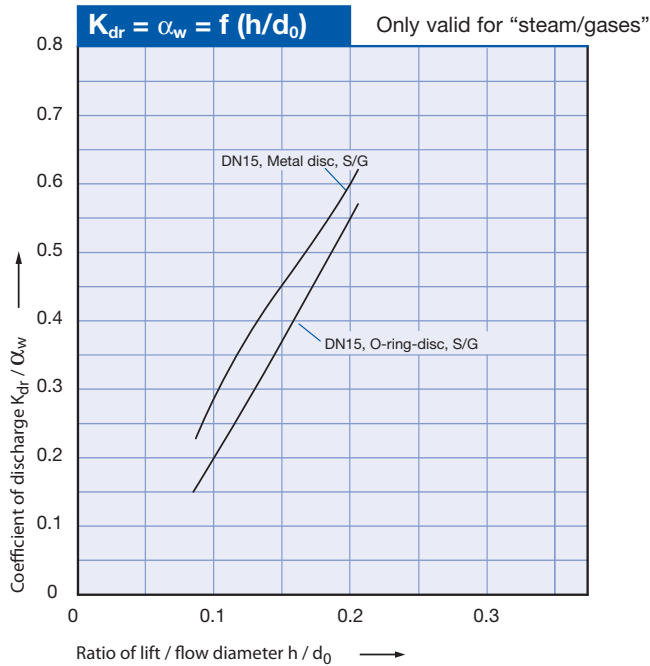

Type 427, 429

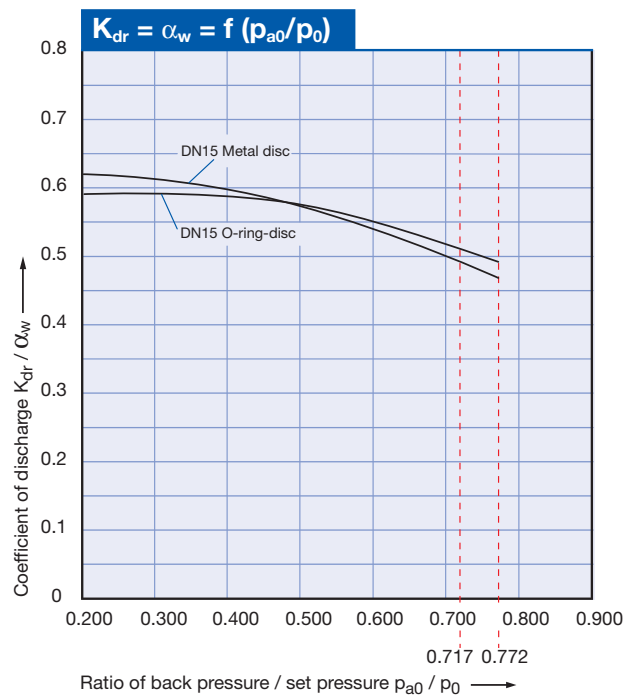

Type 427
Plain lever H3
Open bonnet
Conventional design

Flanged Safety Relief Valves – spring loaded

Contents

Chapter/Page

Materials

- Conventional design 03/02
- Balanced bellows design 03/04

How to order

- Numbering system 03/06
- Article numbers 03/08

Pressure temperature ratings

- Metric units 03/10

Dimensions and weights

- Metric units 03/12

Flange drillings and facings 03/13

Order information - spare parts 03/14

Available options 03/16

Approvals 03/17


Capacities

- Steam [Metric units] 03/18
- Air [Metric units] 03/19
- Water [Metric units] 03/20



Type 429
Cap H2
Closed bonnet
Conventional design

Conventional design

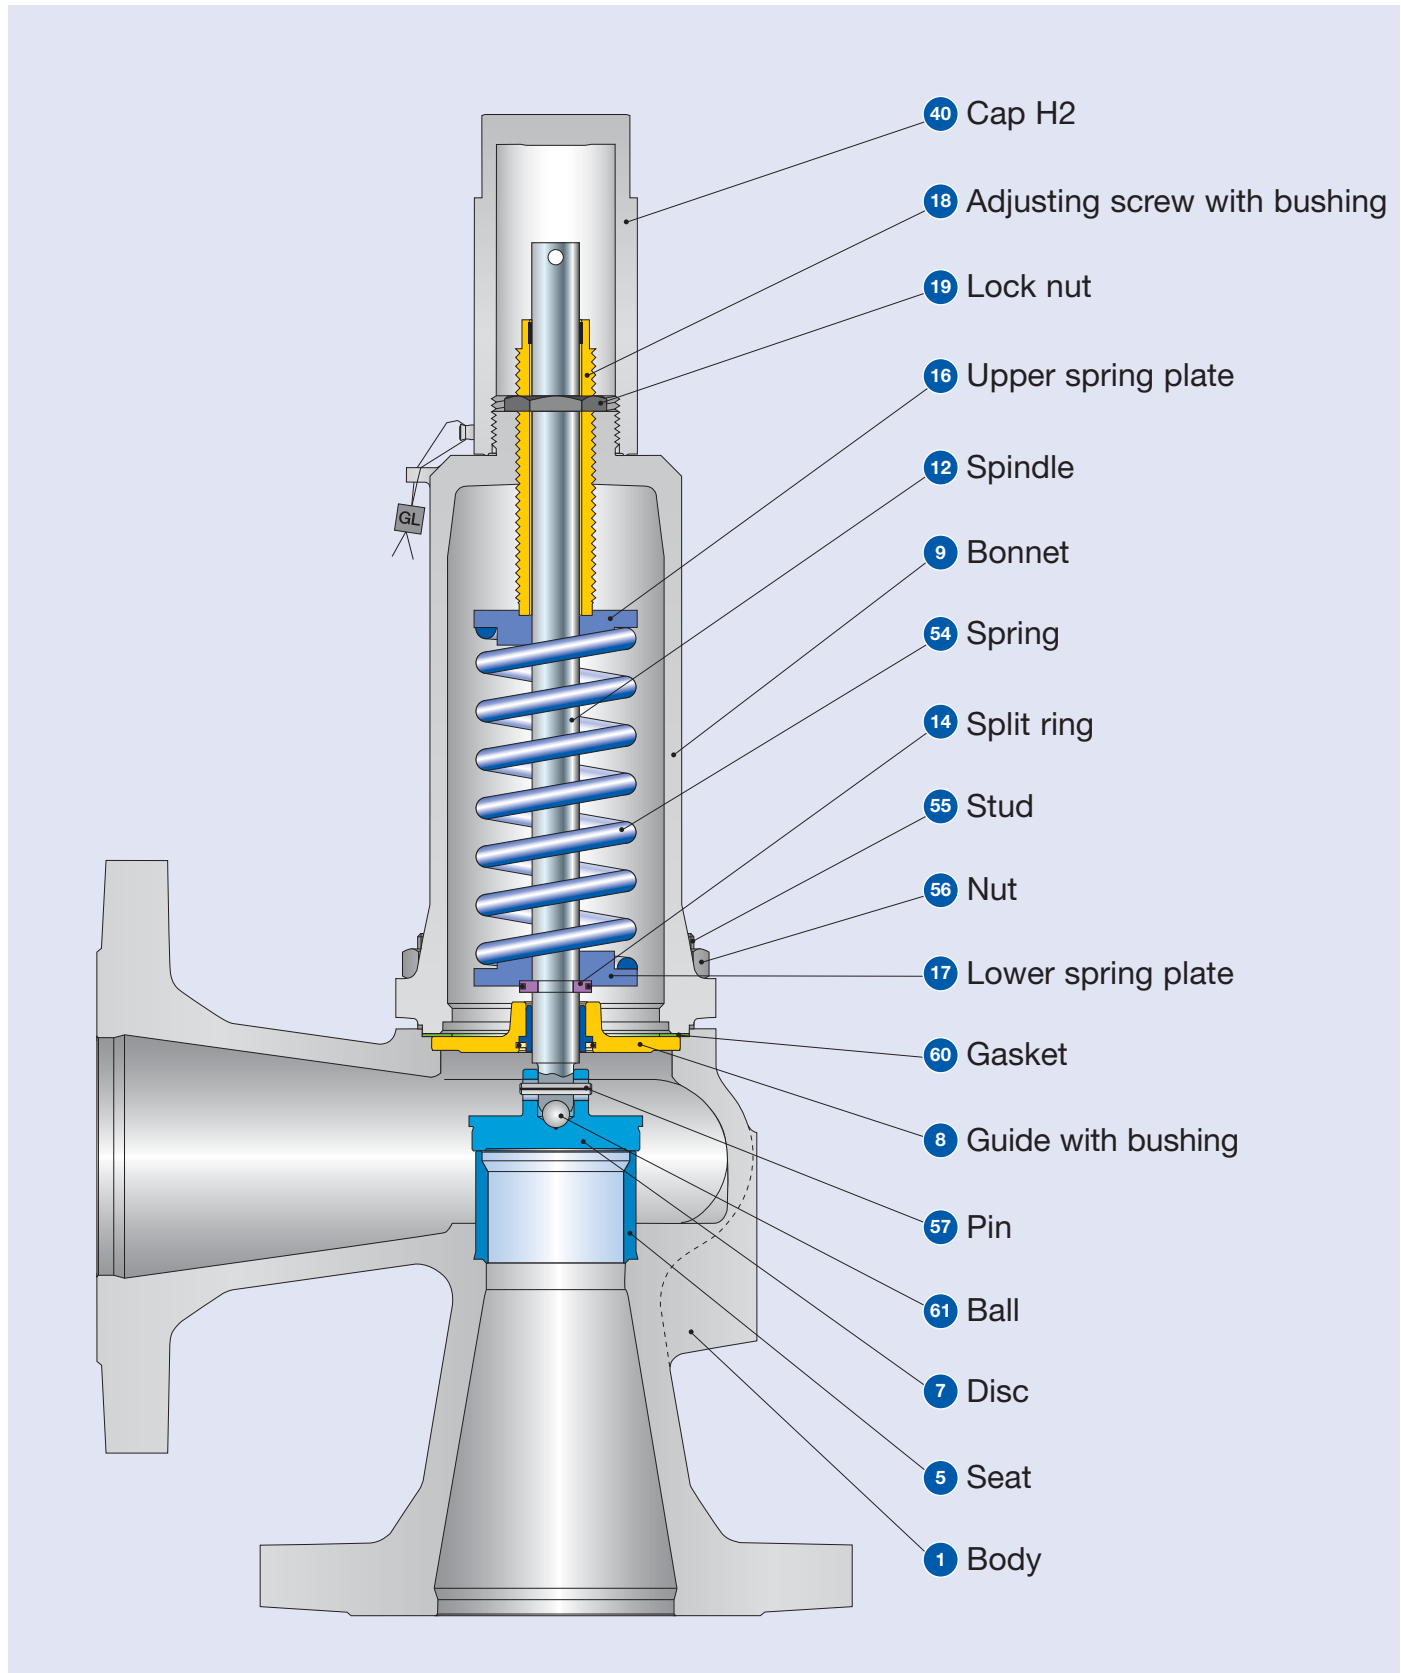

Type 429

Conventional design

| Materials | | | | |
|--------------|------------------------------|--------------------------|--------------------------|---------------------------|
| Item | Component | Type 4275 / 4295 | Type 4272 / 4292 | Type 4294 |
| 1 | Body | 0.7043 | 1.0619 | 1.4408 |
| | | Ductile Gr. 60-40-18 | SA 216 WCB | SA 351 CF8M |
| 5 | Seat | 1.4404 | 1.4404 | 1.4404 |
| | | 316L | 316L | 316L |
| 7 | Disc | 1.4122 | 1.4122 | 1.4404 |
| | | Hardened stainless steel | Hardened stainless steel | 316L |
| 8 | Guide | 1.4104, 1.0501 | 1.4104, 1.0501, 1.0570 | 1.4404 |
| | | Chrome steel or steel | Chrome steel or steel | 316L |
| | with bushing | 1.4104 tenifer | 1.4104 tenifer | - |
| | | Chrome steel tenifer | Chrome steel tenifer | - |
| 9 | Bonnet | 0.7040 | 0.7040 | 1.4408, 1.4404 |
| | | Ductile Gr. 60-40-18 | Ductile Gr. 60-40-18 | SA 351 CF8M, SA 479 316 L |
| 12 | Spindle | 1.4021 | 1.4021 | 1.4404 |
| | | 420 | 420 | 316L |
| 14 | Split ring | 1.4104 | 1.4104 | 1.4404 |
| | | Chrome steel | Chrome steel | 316L |
| 16/17 | Spring plate | 1.0718 | 1.0718 | 1.4404 |
| | | Steel | Steel | 316L |
| 18 | Adjusting screw with bushing | 1.4104 PTFE | 1.4104 PTFE | 1.4404 PTFE |
| | | Chrome steel PTFE | Chrome steel PTFE | 316L PTFE |
| 19 | Lock nut | 1.0718 | 1.0718 | 1.4404 |
| | | Steel | Steel | 316L |
| 40 | Cap H2 | 1.0718 | 1.0718 | 1.4404 |
| | | 12L13 | 12L13 | 316L |
| 54 | Spring, standard | 1.1200, 1.8159, 1.7102 | 1.1200, 1.8159, 1.7102 | 1.4310 |
| | | Steel | Steel | Stainless steel |
| | Spring, optional | 1.4310 | 1.4310 | - |
| | | Stainless steel | Stainless steel | - |
| 55 | Stud | 1.1181 | 1.1181 | 1.4401 |
| | | Steel | Steel | B8M |
| 56 | Nut | 1.0501 | 1.0501 | 1.4401 |
| | | 2H | 2H | 8M |
| 57 | Pin | 1.4310 | 1.4310 | 1.4310 |
| | | Stainless steel | Stainless steel | Stainless steel |
| 60 | Gasket | Graphite / 1.4401 | Graphite / 1.4401 | Graphite / 1.4401 |
| | | Graphite / 316 | Graphite / 316 | Graphite / 316 |
| 61 | Ball | 1.3541 | 1.3541 | 1.4401 |
| | | Hardened stainless steel | Hardened stainless steel | 316 |


Note:

- LESER reserves the right to make changes.
- If several materials are specified LESER defines the material.
- LESER may use higher quality materials without giving prior notice
- Each component can be constructed of another material according to the customer's specification.
- All components exposed to pressure are highlighted in bold. The material will be specified according to DIN and ASTM here.

Type 427, 429

LESER

Balanced bellows design

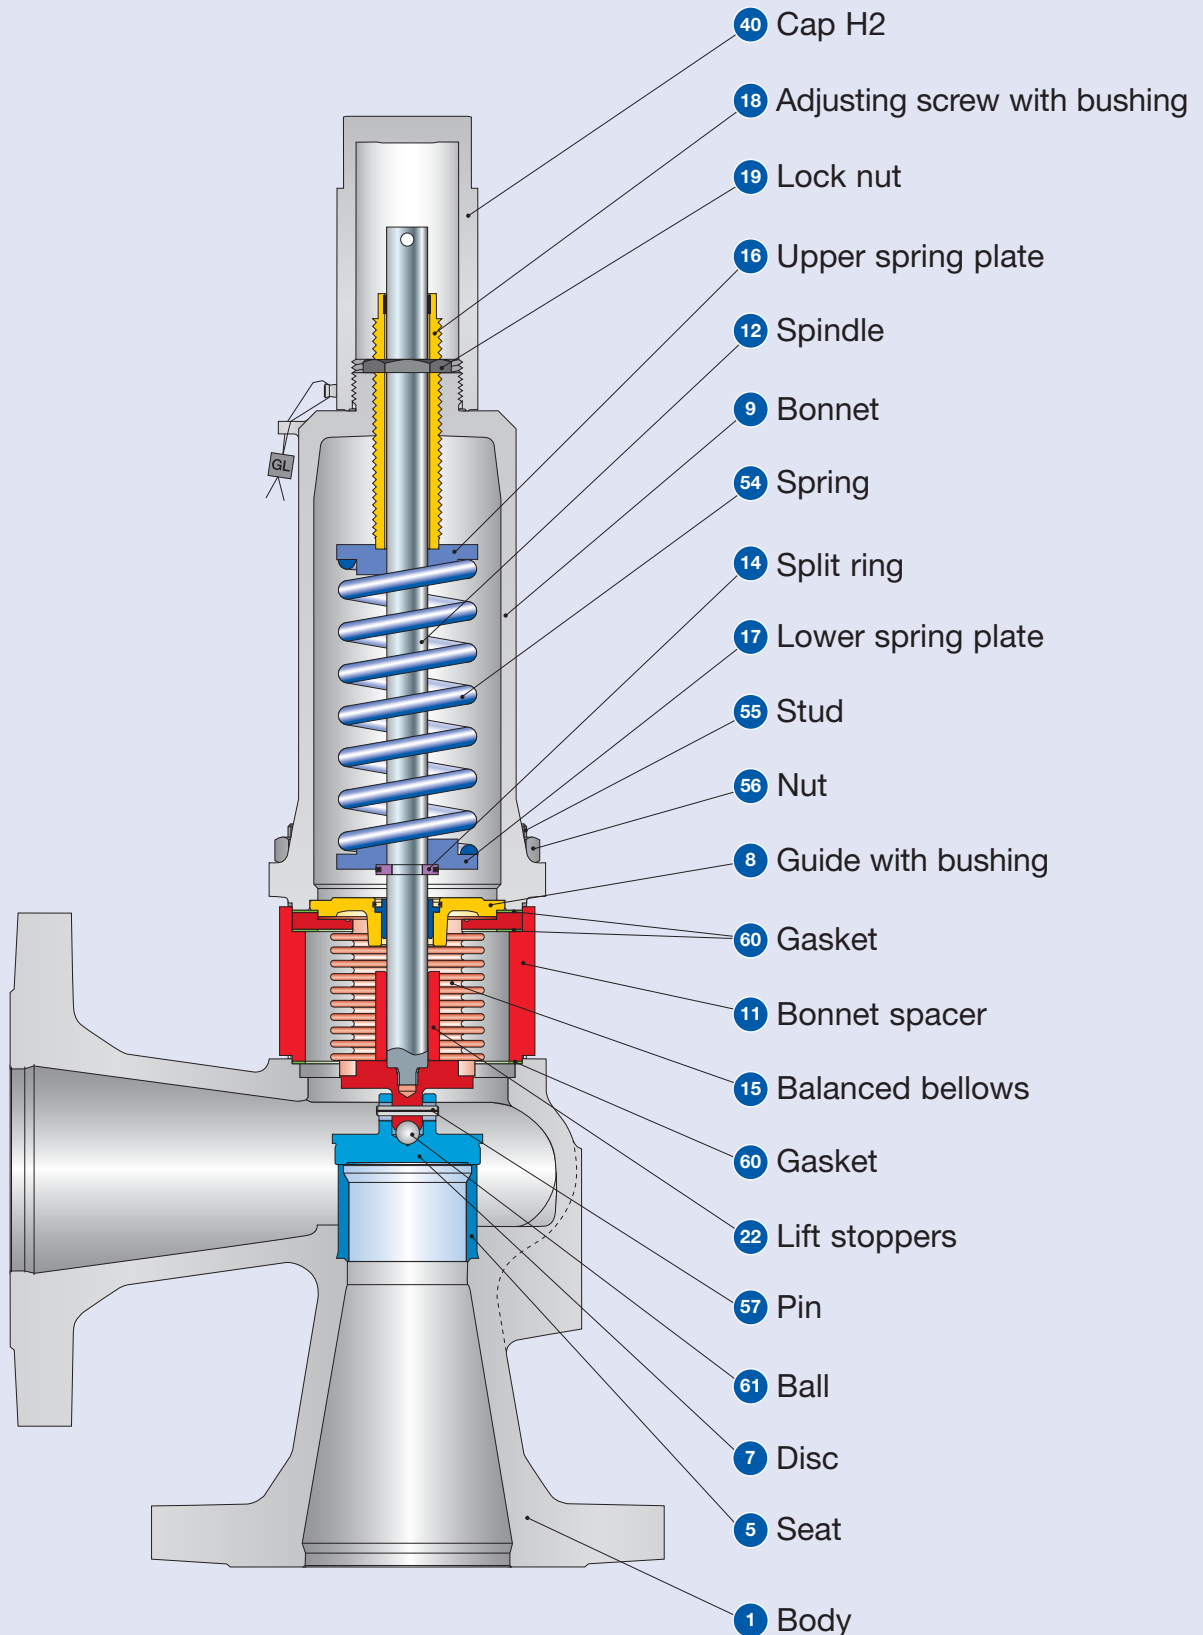

Type 429

Balanced bellows design

| Materials | | | | |
|--------------|------------------------------|--------------------------|--------------------------|-------------------|
| Item | Component | Type 4275 / 4295 | Type 4272 / 4292 | Type 4294 |
| 1 | Body | 0.7043 | 1.0619 | 1.4408 |
| | | Ductile Gr. 60-40-18 | SA 216 WCB | SA 351 CF8M |
| 5 | Seat | 1.4404 | 1.4404 | 1.4404 |
| | | 316L | 316L | 316L |
| 7 | Disc | 1.4122 | 1.4122 | 1.4404 |
| | | Hardened stainless steel | Hardened stainless steel | 316L |
| 8 | Guide | 1.4104, 1.0501 | 1.4104, 1.0501, 1.0570 | 1.4404 |
| | | Chrome steel or steel | Chrome steel or steel | 316L |
| | with bushing | 1.4104 tenifer | 1.4104 tenifer | - |
| | | Chrome steel tenifer | Chrome steel tenifer | - |
| 9 | Bonnet | 0.7040 | 0.7040 | 1.4408 |
| | | Ductile Gr. 60-40-18 | Ductile Gr. 60-40-18 | SA 351 CF8M |
| 11 | Bonnet spacer | 1.4404 | 1.4404 | 1.4404 |
| | | 316L | 316L | 316L |
| 12 | Spindle | 1.4404 | 1.4404 | 1.4404 |
| | | 316L | 316L | 316L |
| 14 | Split ring | 1.4104 | 1.4104 | 1.4404 |
| | | Chrome steel | Chrome steel | 316L |
| 15 | Balanced bellows | 1.4571 | 1.4571 | 1.4571 |
| | | 316Ti | 316Ti | 316Ti |
| 16/17 | Spring plate | 1.0718 | 1.0718 | 1.4404 |
| | | Steel | Steel | 316L |
| 18 | Adjusting screw with bushing | 1.4104 PTFE | 1.4104 PTFE | 1.4404 PTFE |
| | | Chrome steel PTFE | Chrome steel PTFE | 316L PTFE |
| 19 | Lock nut | 1.0718 | 1.0718 | 1.4404 |
| | | Steel | Steel | 316L |
| 22 | Lift stoppers | 1.4404 | 1.4404 | 1.4404 |
| | | 316L | 316L | 316L |
| 40 | Cap H2 | 1.0718 | 1.0718 | 1.4404 |
| | | 12L13 | 12L13 | 316L |
| 54 | Spring, standard | 1.1200, 1.8159, 1.7102 | 1.1200, 1.8159, 1.7102 | 1.4310 |
| | | Steel | Steel | Stainless steel |
| | Spring, optional | 1.4310 | 1.4310 | - |
| 55 | Stud | Stainless steel | Stainless steel | - |
| | | 1.4401 | 1.4401 | 1.4401 |
| 56 | Nut | 8M | B8M | B8M |
| | | 1.4401 | 1.4401 | 1.4401 |
| 57 | Pin | 8M | B8M | B8M |
| | | 1.4310 | 1.4310 | 1.4310 |
| 60 | Gasket | Stainless steel | Stainless steel | Stainless steel |
| | | Graphite / 1.4401 | Graphite / 1.4401 | Graphite / 1.4401 |
| 61 | Ball | Graphite / 316 | Graphite / 316 | Graphite / 316 |
| | | 1.3541 | 1.3541 | 1.4401 |
| 61 | Ball | Hardened stainless steel | Hardened stainless steel | 316 |
| | | Hardened stainless steel | Hardened stainless steel | 316 |

Note:

- LESER reserves the right to make changes.
- If several materials are specified LESER defines the material.
- LESER may use higher quality materials without giving prior notice
- Each component can be constructed of another material according to the customer's specification.
- All components exposed to pressure are highlighted in bold. The material will be specified according to DIN and ASTM here.

How to order – Example for numbering system – Type 429

1

Article Number

4292.7172

2

Set Pressure

5 bar

3

Connections

H45

| | | | |
|-----|---|-----|---|
| 1 | 2 | 3 | 4 |
| 429 | 2 | 717 | 2 |

1 Valve type 427, 429
 Type 429 – with closed bonnet
 Type 427 – with open bonnet

2 Material code

| Code | Body material |
|------|----------------------------------|
| 2 | 1.0619 (WCB) |
| 4 | 1.4408 (CF8M) |
| 5 | 0.7043 (Ductile Gr. 60-40-18) |

3 Valve code
 Automatically determines nominal diameter and body material (see page 03/09).

4

| Code | Lifting device | |
|------|------------------------------|----|
| 2 | Gas-tight cap | H2 |
| 3 | Plain lever | H3 |
| 4 | Packed lever | H4 |
| 5 | Plain lever with open bonnet | H3 |

Please enter the units (in gauge)!

The specified pressure range may not be exceeded!

Please refer to page 03/13.

Type 429

4 Options

J22

| Type 427, 429 | Option code |
|---------------------------------|-------------|
| • O-ring disc | |
| CR "K" | J21 |
| EPDM "D" | J22 |
| FKM "L" | J23 |
| FFKM "C" | J20 |
| • Disc 1.4404 / 316L | L44 |
| • Disc 1.4404 / 316L stellited | J25 |
| • Balanced bellows | |
| - Bonnet, open (Type 427) | J68 |
| - Bonnet, closed (Type 429) | J78 |
| • Elastomer bellows | J79 |
| • High temperature alloy spring | X01 |
| • Stainless steel spring | X04 |
| • Adapter for lift indicator H4 | J39 |
| • Lift indicator | J93 |
| • Test gag | |
| - Cap H2 | J70 |
| - Packed lever H4 | J69 |
| • O-ring damper | |
| - Cap H2 | J65 |
| - Packed lever H4 | J66 |
| • Heating jacket | |
| - Couplings G 3/8 | H29 |
| G 3/4 | H30 |
| - Flange DN 15 | H31 |
| DN 25 | H32 |
| • Drain hole G 1/4 | J18 |
| G 1/2 | J19 |
| • Oil and grease free | J85 |
| • Materials | |
| - NACE | N78 |

Option code applies only if not standard

5 Documentation

H01 L30

Please select the necessary documentation:

| Tests, Certifications: | Option code |
|--|--------------------|
| DIN EN 10204-3.2: TÜV-Nord Certification for set pressure | M33 |
| LESER CGA (Certificate for Global Application) | H03 |
| - Acceptance test certificate 3.1 acc.to DIN EN 10204 | |
| - Declaration of conformity as per pressure equipment directive PED 97/23/EC | |
| Material quality certificate: DIN EN 10204-3.1 | |
| Component | Option code |
| Body | H01 |
| Bonnet | L30 |
| Cap / lever cover | L31 |
| Disc | L23 |
| Screws | N07 |
| Nuts | N08 |


6 Code and Medium

2.0


| | |
|---|---|
| 1 | 2 |
| 2 | 0 |
| 1 Code | |
| 2. CE / VdTUEV | |
| 3. ASME Section VIII + CE / VdTUEV | |
| 2 Medium | |
| .0 steam / gases / liquids (only valid for CE / VdTUEV) | |

Type 429


How to order – Article numbers

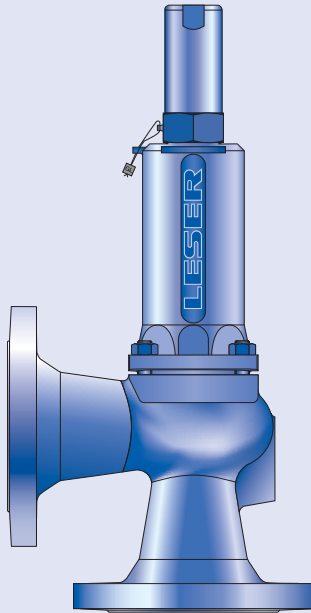


Type 429
Cap H2
Closed bonnet
Conventional design

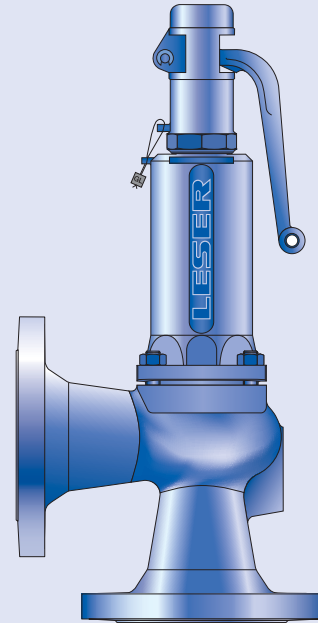


Type 429
Plain lever H3
Closed bonnet
Conventional design

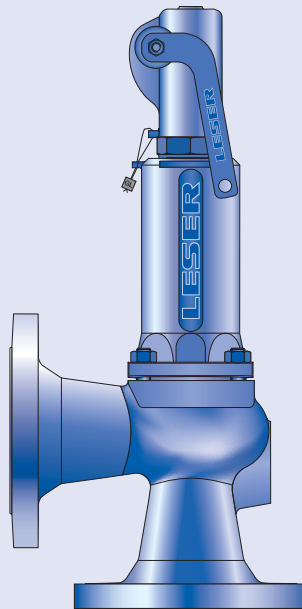

Type 429
Packed lever H4
Closed bonnet
Conventional design

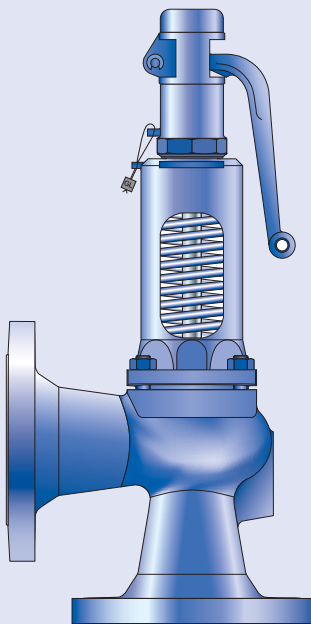

Type 427
Plain lever H3
Open bonnet
Conventional design

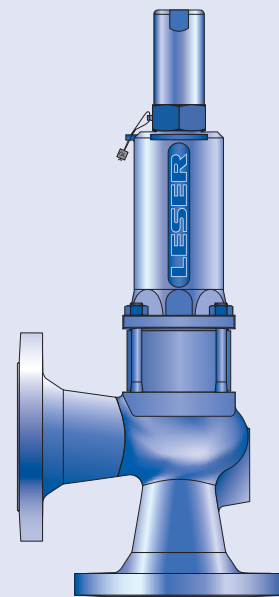

Type 429
Cap H2
Closed bonnet
Balanced bellows design

How to order – Article numbers

| Article numbers | | | | | | | | | | | | | |
|--|--|----------------|------|------|------|------|------|------|------|------|------|------|------|
| | DN _i | | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 | 125 | 150 |
| | DN _o | | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 | 125 | 150 |
| | Actual orifice diameter d _o [mm] | | 12 | 18 | 18 | 18 | 23 | 29 | 37 | 46 | 60 | 74 | 92 |
| | Actual orifice area A _o [mm ²] | | 113 | 254 | 254 | 254 | 416 | 661 | 1075 | 1662 | 2827 | 4301 | 6648 |
| Body material: 0.7043 (Ductile Gr. 60-40-18) | | | | | | | | | | | | | |
| Bonnet closed | H2 | Art.-No. 4295. | 8612 | 8622 | 8632 | 8642 | 8652 | 8662 | 8672 | 8682 | 8692 | - | - |
| | H3 | Art.-No. 4295. | 8613 | 8623 | 8633 | 8643 | 8653 | 8663 | 8673 | 8683 | 8693 | - | - |
| | H4 | Art.-No. 4295. | 8614 | 8624 | 8634 | 8644 | 8654 | 8664 | 8674 | 8684 | 8694 | - | - |
| open | H3 | Art.-No. 4275. | 8615 | 8625 | 8635 | 8645 | 8655 | 8665 | 8675 | 8685 | 8695 | - | - |
| Body material: 1.0619 (WCB) | | | | | | | | | | | | | |
| Bonnet closed | H2 | Art.-No. 4292. | 7122 | 7132 | 7142 | 7152 | 7162 | 7172 | 7182 | 7192 | 7202 | 7212 | 7222 |
| | H3 | Art.-No. 4292. | 7123 | 7133 | 7143 | 7153 | 7163 | 7173 | 7183 | 7193 | 4203 | 7213 | 7223 |
| | H4 | Art.-No. 4292. | 7124 | 7134 | 7144 | 7154 | 7164 | 7174 | 7184 | 7194 | 4204 | 7214 | 7224 |
| open | H3 | Art.-No. 4272. | 7125 | 7135 | 7145 | 7155 | 7165 | 7175 | 7185 | 7195 | 4205 | 7215 | 7225 |
| Body material: 1.4408 (CF8M) | | | | | | | | | | | | | |
| Bonnet closed | H2 | Art.-No. 4294. | 7242 | 7252 | 7262 | 7272 | 7282 | 7292 | 7302 | 7312 | 7322 | - | - |
| | H4 | Art.-No. 4294. | 7244 | 7254 | 7264 | 7274 | 7284 | 7294 | 7304 | 7314 | 7324 | - | - |

Pressure temperature ratings

| Metric units | | | | | | | | | | | | | |
|---|--|-------|-----|-----|-----|-----|-----|------|------|------|------|------|---|
| | DN _i | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 | 125 | 150 | |
| | DN _o | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 | 125 | 150 | |
| | Actual orifice diameter d _o [mm] | 12 | 18 | 18 | 18 | 23 | 29 | 37 | 46 | 60 | 74 | 92 | |
| | Actual orifice area A _o [mm ²] | 113 | 254 | 254 | 254 | 416 | 661 | 1075 | 1662 | 2827 | 4301 | 6648 | |
| Body material: 0.7043 (Ductile Gr. 60-40-18) | | | | | | | | | | | | | |
| DIN flange | Inlet | PN 16 | | | | | | | | | | - | - |
| | Outlet | PN 16 | | | | | | | | | | - | - |
| Minimum set pressure | p [bar _g] S/G/L | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | - | - | |
| Min. set pressure ¹⁾ standard bellows | p [bar _g] S/G/L | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | - | - | |
| Min. set pressure low pressure bellows | p [bar _g] S/G/L | - | 2.0 | 2.0 | 2.0 | 1.8 | 1.9 | 1.8 | 1.8 | 1.2 | - | - | |
| Maximum set pressure | p [bar _g] S/G/L | 40 | 40 | 40 | 40 | 40 | 40 | 35 | 35 | 30 | - | - | |
| Max. set pressure with special spring | p [bar _g] S/G/L | 40 | 40 | 40 | 40 | 40 | 40 | 40 | 35 | 30 | - | - | |
| Temperature ²⁾ acc. to DIN EN | min. [°C] | -60 | | | | | | | | | | - | - |
| | max. [°C] | +350 | | | | | | | | | | - | - |

¹⁾ Min. set pressure of standard bellows = max. set pressure of bellows for low set pressure.

²⁾ The temperature is limited by the soft seal material (see page 99/10). The values given here are valid for EPDM. Between -10°C and the lowest specified application temperature, proceed acc. to AD 2000-Merkblatt W10.

| Metric units | | | | | | | | | | | | | |
|---|--|-------|-----|-----|-----|-----|-----|------|------|------|------|------------|---|
| | DN _i | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 | 125 | 150 | |
| | DN _o | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 | 125 | 150 | |
| | Actual orifice diameter d _o [mm] | 12 | 18 | 18 | 18 | 23 | 29 | 37 | 46 | 60 | 74 | 92 | |
| | Actual orifice area A _o [mm ²] | 113 | 254 | 254 | 254 | 416 | 661 | 1075 | 1662 | 2827 | 4301 | 6648 | |
| Body material: 1.0619 (WCB) | | | | | | | | | | | | | |
| DIN flange | Inlet | PN 40 | | | | | | | | | | - | - |
| | Outlet | PN 40 | | | | | | | | | | - | - |
| Minimum set pressure | p [bar _g] S/G/L | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | |
| Min. set pressure ¹⁾ standard bellows | p [bar _g] S/G/L | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | |
| Min. set pressure low pressure bellows | p [bar _g] S/G/L | - | 2.0 | 2.0 | 2.0 | 1.8 | 1.9 | 1.8 | 1.8 | 1.2 | 1.2 | on request | |
| Maximum set pressure | p [bar _g] S/G/L | 40 | 40 | 40 | 40 | 40 | 40 | 35 | 35 | 30 | 32 | 16 | |
| Max. set pressure with special spring | p [bar _g] S/G/L | 40 | 40 | 40 | 40 | 40 | 40 | 40 | 35 | 30 | 32 | 16 | |
| Temperature ²⁾ acc. to DIN EN | min. [°C] | -85 | | | | | | | | | | - | - |
| | max. [°C] | +450 | | | | | | | | | | - | - |

Pressure temperature ratings

| Metric units | | | | | | | | | | | | | |
|---|--|-----------------------------|-----|-----|-----|-----|-----|------|------|------|------|------|---|
| | DN _i | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 | 125 | 150 | |
| | DN _o | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 | 125 | 150 | |
| | Actual orifice diameter d _o [mm] | 12 | 18 | 18 | 18 | 23 | 29 | 37 | 46 | 60 | 74 | 92 | |
| | Actual orifice area A _o [mm ²] | 113 | 254 | 254 | 254 | 416 | 661 | 1075 | 1662 | 2827 | 4301 | 6648 | |
| Body material: 1.4408 (CF8M) | | | | | | | | | | | | | |
| DIN flange | Inlet | | | | | | | | | | | - | - |
| | Outlet | | | | | | | | | | | - | - |
| Minimum set pressure | p [bar _g] S/G/L | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | - | - |
| | Min. set pressure ¹⁾ standard bellows | p [bar _g] S/G/L | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | - | - |
| Min. set pressure low pressure bellows | p [bar _g] S/G/L | - | 2.0 | 2.0 | 2.0 | 1.8 | 1.9 | 1.8 | 1.8 | 1.2 | - | - | |
| | Maximum set pressure | p [bar _g] S/G/L | 40 | 40 | 40 | 40 | 40 | 31.6 | 31.0 | 30 | 22 | - | - |
| Max. set pressure with special spring | p [bar _g] S/G/L | 40 | 40 | 40 | 40 | 40 | 40 | 31 | 30 | 22 | - | - | |
| | Temperature ²⁾ acc. to DIN EN | min. [°C] | | | | | | | | | | -270 | - |
| max. [°C] | | | | | | | | | | | +400 | - | - |

¹⁾ Min. set pressure of standard bellows = max. set pressure of bellows for low set pressure.

²⁾ The temperature is limited by the soft seal material (see page 99/10). The values given here are valid for EPDM. Between -10°C and the lowest specified application temperature, proceed acc. to AD 2000-Merkblatt W10.

Dimensions and weights

| Metric units | | | | | | | | | | | | |
|--|---|-----|-----|-----|-----|-----|-----|------|------|------|------|------|
| | DN _i | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 | 125 | 150 |
| | DN _o | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 | 125 | 150 |
| | Actual orifice diameter d _o [mm] | 12 | 18 | 18 | 18 | 23 | 29 | 37 | 46 | 60 | 74 | 92 |
| | Actual orifice area A ₀ [mm ²] | 113 | 254 | 254 | 254 | 416 | 661 | 1075 | 1662 | 2827 | 4301 | 6648 |
| Weight [kg] | | 5 | 6 | 6 | 8 | 9 | 12 | 15 | 20 | 33 | 48 | 65 |
| | with bellows | 6.3 | 6.4 | 6.4 | 8.4 | 9.6 | 13 | 16 | 21.6 | 35.6 | 52.1 | 78.4 |
| Centre to face [mm] | Inlet a | 90 | 95 | 100 | 105 | 115 | 125 | 145 | 155 | 175 | 200 | 225 |
| | Outlet b | 90 | 95 | 100 | 105 | 115 | 125 | 145 | 155 | 175 | 200 | 225 |
| Height (H4) [mm] | Standard H max. | 310 | 307 | 311 | 320 | 320 | 360 | 476 | 525 | 609 | 743 | 865 |
| | Bellows H max. | 359 | 337 | 341 | 355 | 355 | 425 | 536 | 595 | 684 | 823 | 960 |
| Support brackets [mm] | A | | | | | | | | | | | 277 |
| | B | | | | | | | | | | | 160 |
| (Drilled only on request, option code H42) | C | | | | | | | | | | | Ø 18 |
| | D | | | | | | | | | | | 278 |
| | E | | | | | | | | | | | 21 |

Body material: 0.7043 (Ductile Gr. 60-40-18)

| | | | | |
|--------------------------------|--------|-------|---|---|
| DIN flange¹⁾ | Inlet | PN 40 | - | - |
| | Outlet | PN 40 | - | - |


Body material: 1.0619 (WCB)

| | | | | |
|--------------------------------|--------|-------|---|---|
| DIN flange¹⁾ | Inlet | PN 40 | - | - |
| | Outlet | PN 40 | - | - |


Body material: 1.4408 (CF8M)

| | | | | |
|--------------------------------|--------|-------|---|---|
| DIN flange¹⁾ | Inlet | PN 40 | - | - |
| | Outlet | PN 40 | - | - |


¹⁾ Standard flange class For other flange drillings, see page 03/13.

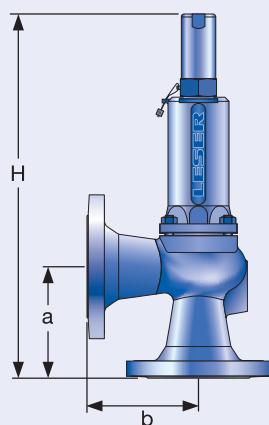

Conventional design

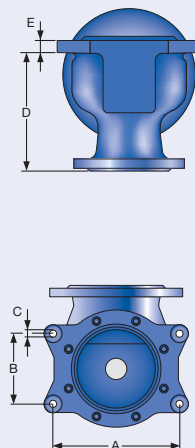

Support brackets

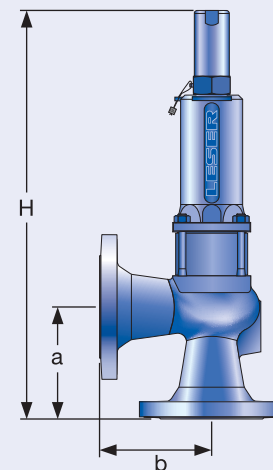

Balanced bellows design

Flange drillings

| Flange drillings | | | | | | | | | | | | | |
|---|---|-------------|-------------|---------|-----------------|-----------------|---------|-----------------|---------|---------|---------|---------|-----|
| | DN _i | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 | 125 | 150 | |
| | DN _o | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 | 125 | 150 | |
| | Valve size | 1/2" x 1/2" | 3/4" x 3/4" | 1" x 1" | 1 1/4" x 1 1/4" | 1 1/2" x 1 1/2" | 2" x 2" | 2 1/2" x 2 1/2" | 3" x 3" | 4" x 4" | 5" x 5" | 6" x 6" | |
| | Actual orifice diameter d ₀ [mm] | 12 | 18 | 18 | 18 | 23 | 29 | 37 | 46 | 60 | 74 | 92 | |
| | Actual orifice area A ₀ [mm ²] | 113 | 254 | 254 | 254 | 416 | 661 | 1075 | 1662 | 2827 | 4301 | 6648 | |
| Body material: 0.7043 (Ductile Gr. 60-40-18), 1.0619 (WCB), 1.4408 (CF8M) | | | | | | | | | | | | | |
| Inlet | DIN EN 1092 | PN 10 | * | * | * | * | * | * | H44 | H44 | H44 | H44 | H44 |
| | | PN 16 | * | * | * | * | * | * | H45 | H45 | H45 | H45 | H45 |
| | | PN 25 | * | * | * | * | * | * | * | * | * | * | * |
| | | PN 40 | * | * | * | * | * | * | * | * | * | * | * |
| | ASME B16.5 ¹⁾ | CL150 | H64 | H64 | H64 | H64 | H64 | H64 | H64 | H64 | [H64] | H64 | H64 |
| | | CL300 | [H65] | – | H65 | H65 | – | [H65] | [H65] | – | – | – | – |
| Outlet | DIN EN 1092 | PN 10 | * | * | * | * | * | * | H50 | H50 | H50 | H50 | H50 |
| | | PN 16 | * | * | * | * | * | * | H51 | H51 | H51 | H51 | H51 |
| | | PN 25 | * | * | * | * | * | * | * | * | * | * | * |
| | | PN 40 | * | * | * | * | * | * | * | * | * | * | * |
| | ASME B16.5 ¹⁾ | CL150 | H79 | H79 | H79 | H79 | H79 | H79 | H79 | H79 | [H79] | H79 | H79 |
| | | CL300 | H80 | – | H80 | H80 | – | [H80] | [H80] | – | – | – | – |

| Flange facings | | | | | | | | | | | | | |
|--|------------------------|---------------|-----------------------------|--------|-----------------|---------------|----------------|-------------|----------------|--|--|--|--|
| Information | Standard | Inlet | | | | Outlet | | | | Remark | | | |
| General | | | | | | | | | | | | | |
| Flange, undrilled | – | H38 | | | | H39 | | | | | | | |
| Linde-V-Nut, Form V48 | Linde Standard 420-08 | J07 | | | | J08 | | | | Groove: Rz = 16 | | | |
| Linde-V-Nut, Form V48A | LWN 313.36 | J05 | | | | J06 | | | | Groove: Rz = 4, e.g. for hydrogen | | | |
| Lens-shape seal form L (without lens-shape seal) | DIN 2696 LWN 313.35 | J11 | | | | J12 | | | | | | | |
| According to DIN EN 1092 | | | | | | | | | | | | | |
| Flange facings | | Inlet | | | | Outlet | | | | Remark | | | |
| DIN EN 1092 (also see LWN 313.40) | | PN 10 – PN 40 | | | | PN 10 – PN 40 | | | | Rz specification acc. to DIN EN 1092 in µm | | | |
| Sealing strip | Form B1 | * | | | | * | | | | Seal. strip.: Rz = 12.5 – 50 | | | |
| | Form B2 | L36 | | | | L38 | | | | Seal. strip.: Rz = 3.2 – 12.5 | | | |
| Tongue, Form C ¹⁾ | | H94 | | | | H92 | | | | only for steel flange | | | |
| Groove, Form D ¹⁾ | | H93 | | | | H91 | | | | | | | |
| Male, Form E | | H96 | | | | H98 | | | | | | | |
| Female, Form F | | H97 | | | | H99 | | | | | | | |
| O-ring Male, Form G | | J01 | | | | J02 | | | | | | | |
| O-ring Female, Form H | | J03 | | | | J04 | | | | | | | |
| According to ASME B16.5 | | | | | | | | | | | | | |
| Body material | Inlet | Outlet | Smooth Finish ²⁾ | | Serrated Finish | | RTJ-Groove | | | | | | |
| | | | Inlet | Outlet | Inlet | Outlet | Inlet | | Outlet | | | | |
| | | | Option code | | Option code | | Pressure level | Option code | Pressure level | Option code | | | |
| 0.7043, 1.0619, 1.4408 | all | all | L52 | L53 | * | * | – | – | – | – | | | |

¹⁾ LESER manufactures the groove at flanged valves by milling. If a customer demands a turned surface in the soil of the groove according to DIN EN 1092-1 an additional option code is necessary: "S01: soil of the groove drilled".

²⁾ Smooth finish is not defined in the effective standards.

For an explanation of signs and symbols, refer to page 00/07.

Note: Flange drillings and facings always meet the requirements of mentioned flange standards.
Flange thickness and outer diameter may deviate from flange standard.

Order information – Spare parts

| Spare parts | | | | | | | |
|---|--|---------------|---------------|---------------------------------------|---------------|---------------|---------------|
| | DN _i | 15 | 20 | 25 | 32 | 40 | 50 |
| | DN _o | 15 | 20 | 25 | 32 | 40 | 50 |
| | Actual orifice diameter d ₀ [mm] | 12 | 18 | 18 | 18 | 23 | 29 |
| | Actual orifice area A ₀ [mm ²] | 113 | 254 | 254 | 254 | 416 | 661 |
| Disc (item 7): Metal seat | | | | Material-No. / Art.-No. | | | |
| Disc | 1.4122 | 212.3439.9000 | 211.0139.9000 | 211.0139.9000 | 211.0139.9000 | 211.0239.9000 | 211.0339.9000 |
| Detachable lifting aid | 1.4404 | 212.3449.9000 | 211.0149.9000 | 211.0149.9000 | 211.0149.9000 | 211.0249.9000 | 211.0349.9000 |
| Disc (item 7): Soft seal | | | | Material-No. / Art.-No. | | | |
| Disc | CR | “K” | – | 200.6849.9051 | 200.6849.9051 | 200.6849.9051 | 200.7049.9051 |
| | EPDM | “D” | – | 200.6849.9041 | 200.6849.9051 | 200.6849.9041 | 200.6849.9051 |
| | FKM | “L” | – | 200.6849.9071 | 200.6849.9051 | 200.6849.9071 | 200.6849.9051 |
| | FFKM | “C” | – | 200.6849.9091 | 200.6849.9051 | 200.6849.9091 | 200.6849.9051 |
| O-ring (item 7.4): Soft seal | | | | Material-No. / Art.-No. | | | |
| O-ring | CR | “K” | – | 502.0171.2651 | 502.0171.2651 | 502.0171.2651 | 502.0249.3551 |
| | EPDM | “D” | – | 502.0171.2641 | 502.0171.2641 | 502.0171.2641 | 502.0249.3541 |
| | FKM | “L” | – | 502.0171.2671 | 502.0171.2671 | 502.0171.2671 | 502.0249.3571 |
| | FFKM | “C” | – | 502.0171.2691 | 502.0171.2691 | 502.0171.2691 | 502.0249.3591 |
| Bellows (item 15): 1.4571 | | | | Material-No. / Art.-No. | | | |
| Standard bellows | | 400.0149.0000 | 400.0149.0000 | 400.0149.0000 | 400.0149.0000 | 400.0249.0000 | 400.0349.0000 |
| Conversion kit, standard¹⁾ | | 5021.1030 | 5021.1034 | 5021.1034 | 5021.1034 | 5021.1035 | 5021.1036 |
| Low pressure bellows | | – | 400.0149.0021 | 400.0149.0021 | 400.0149.0021 | 400.0249.0021 | 400.0349.0021 |
| Conversion kit low pressure¹⁾ | | | | Please specify application conditions | | | |
| Gasket – body / bonnet (item 60) | | | | Material-No. / Art.-No. | | | |
| Gasket | Graphite + 1.4401 | 500.0407.0000 | 500.0407.0000 | 500.0407.0000 | 500.0407.0000 | 500.0407.0000 | 500.0507.0000 |
| Option code L68 Gylon (PTFE compliance) | | 500.0405.0000 | 500.0405.0000 | 500.0405.0000 | 500.0405.0000 | 500.0405.0000 | 500.0505.0000 |
| Ball (item 61): | | | | Material-No. / Art.-No. | | | |
| Ball | Ball Ø [mm] | 6 | 6 | 6 | 6 | 6 | 6 |
| | 1.4404 | 510.0104.0000 | 510.0104.0000 | 510.0104.0000 | 510.0104.0000 | 510.0104.0000 | 510.0104.0000 |
| Split ring (item 14): | | | | Material-No. / Art.-No. | | | |
| Split ring | Spindle Ø [mm] | 12 | 12 | 12 | 12 | 12 | 12 |
| | 1.4404 | 251.0149.0000 | 251.0149.0000 | 251.0149.0000 | 251.0149.0000 | 251.0149.0000 | 251.0149.0000 |
| Pin (item 57) | | | | Material-No. / Art.-No. | | | |
| Pin | 1.4310 | 480.0505.0000 | 480.0505.0000 | 480.0505.0000 | 480.0505.0000 | 480.0505.0000 | 480.0705.0000 |
| O-ring damper | | | | Material-No. / Art.-No. | | | |
| | Conversion kit H2 | 5021.1060 | – | 5021.1060 | 5021.1060 | 5021.1060 | 5021.1060 |
| | Conversion kit H4 | 5021.1064 | – | 5021.1064 | 5021.1064 | 5021.1064 | 5021.1064 |

¹⁾ Pressure range, see page 03/10 – 03/11

A conversion kit includes the following components:

| Item. | Components | No. |
|-------|-------------------------------------|------------------------------|
| 8 | Guide with bushing | 1 |
| 11 | Bonnet spacer | 1 |
| 12 | Spindle | 1 |
| 15 | Bellows | 1 |
| 55 | Stud | 4, 8 dependant on valve size |
| 60 | Gasket | 2, 3 dependant on valve size |
| | Installation instruction LWN 037.05 | 1 |

Refer to page 03/04

Order information – Spare parts

| Spare parts | | | | | | | |
|---|---|---------------|---------------|--------------------------------|-----------------|-----------------|---------------|
| | DN _i | 65 | 80 | 100 | 125 | 150 | |
| | DN _o | 65 | 80 | 100 | 125 | 150 | |
| | Actual orifice diameter d ₀ [mm] | 37 | 46 | 60 | 74 | 92 | |
| | Actual orifice area A ₀ [mm ²] | 1075 | 1662 | 2827 | 4301 | 6648 | |
| Disc (item 7): Metal seat | | | | | | | |
| | | | | Material-No. / Art.-No. | | | |
| Disc | 1.4122 | 211.0439.9000 | 211.0639.9000 | 212.0539.9000 | 212.0639.9000 | 211.1239.9000 | |
| Detachable lifting aid | 1.4404 | 211.0449.9000 | 211.0649.9000 | 212.0549.9000 | 212.0649.9000 | 212.0749.9000 | |
| Disc (item 7): Soft seal | | | | | | | |
| | | | | Material-No. / Art.-No. | | | |
| Disc | CR | “K” | 200.7149.9051 | 200.7249.9051 | 200.7349.9051 | 200.7449.9051 | on request |
| | EPDM | “D” | 200.7149.9041 | 200.7249.9041 | 200.7349.9041 | 200.7449.9041 | on request |
| | FKM | “L” | 200.7149.9071 | 200.7249.9071 | 200.7349.9071 | 200.7449.9071 | 200.7549.9071 |
| | FFKM | “C” | 200.7149.9091 | 200.7249.9091 | on request | on request | on request |
| O-ring (item 7.4): Soft seal | | | | | | | |
| | | | | Material-No. / Art.-No. | | | |
| O-ring | CR | “K” | 502.0408.3551 | 502.0503.3551 | 502.0660.5351 | 502.0819.5351 | on request |
| | EPDM | “D” | 502.0408.3541 | 502.0503.3541 | 502.0660.5341 | 502.0819.5341 | on request |
| | FKM | “L” | 502.0408.3571 | 502.0503.3571 | 502.0660.5371 | 502.0819.5371 | 502.1041.5371 |
| | FFKM | “C” | 502.0408.3591 | 502.0503.3591 | on request | on request | on request |
| Bellows (item 15): 1.4571 | | | | | | | |
| | | | | Material-No. / Art.-No. | | | |
| Standard bellows | | 400.0449.0000 | 400.0549.0000 | 400.0649.0000 | 400.0749.0000 | 400.0849.0000 | |
| Conversion kit, standard¹⁾ | | 5021.1037 | 5021.1038 | 5021.1039 | Component parts | Component parts | |
| Low pressure bellows | | 400.0449.0021 | 400.0549.0021 | 400.0649.0021 | 400.1107 | 400.0849.0021 | |
| Conversion kit low pressure¹⁾ | Please specify application conditions | | | | - | - | |
| Gasket – body / bonnet (item 60) | | | | | | | |
| | | | | Material-No. / Art.-No. | | | |
| Gasket | Graphite + 1.4401 | 500.0907.0000 | 500.1007.0000 | 500.1507.0000 | 500.1807.0000 | 500.2107.0000 | |
| Option code L68 Gylon (PTFE compliance) | | 500.0905.0000 | 500.1005.0000 | 500.1505.0000 | 500.1805.0000 | 500.2105.0000 | |
| Ball (item 61): | | | | | | | |
| | | | | Material-No. / Art.-No. | | | |
| Ball | Ball Ø [mm] | 9 | 9 | 12 | 12 | 15 | |
| | 1.4404 | 510.0204.0000 | 510.0204.0000 | 510.0304.0000 | 510.0304.0000 | 510.0404.0000 | |
| Split ring (item 14): | | | | | | | |
| | | | | Material-No. / Art.-No. | | | |
| Split ring | Spindle Ø [mm] | 16 | 16 | 16 | 20 | 24 | |
| | 1.4404 | 251.0249.0000 | 251.0249.0000 | 251.0249.0000 | 251.0349.0000 | 251.0449.0000 | |
| Pin (item 57) | | | | | | | |
| | | | | Material-No. / Art.-No. | | | |
| Pin | 1.4310 | 480.0705.0000 | 480.0705.0000 | 480.1005.0000 | 480.1005.0000 | 480.1105.0000 | |
| O-ring damper | | | | | | | |
| | | | | Material-No. / Art.-No. | | | |
| | Conversion kit H2 | 5021.1061 | 5021.1061 | - | - | - | |
| | Conversion kit H4 | 5021.1065 | 5021.1065 | - | - | - | |

¹⁾ Pressure range, see page 03/10 – 03/11

One bellows conversion set includes the following components:

| Item. | Components | No. |
|-------|-------------------------------------|------------------------------|
| 8 | Guide with bushing | 1 |
| 11 | Bonnet spacer | 1 |
| 12 | Spindle | 1 |
| 15 | Bellows | 1 |
| 55 | Stud | 4, 8 dependant on valve size |
| 60 | Gasket | 2, 3 dependant on valve size |
| | Installation instruction LWN 037.05 | 1 |


Refer to page 03/04

Available options

For more information, also see
"Accessories and options" as of page 99/01.


Heating jacket

H29, H30: Coupling G 3/8, G 3/4
H31, H32: Flange DN15, DN25




Drain hole

J18: G 1/4
J19: G 1/2




Open bonnet

See Art.-No.




O-ring disc

J20: FFKM "C"
J21: CR "K"
J22: EPDM "D"
J23: FKM "L"




Balanced bellows

J68: Open bonnet
J78: Closed bonnet




Conversion set for balanced bellows

Art.-No. see page 02/14




Screwed cap H2

H2




Plain lever H3

H3




Packed lever H4

H4




O-ring damper H2

J65




O-ring damper H4

J66




Lift indicator

J39: Adaptor H4
J93: Lift indicator



Test gag

J69: H4
J70: H4



Approvals

| Approvals | | |
|---|--|---|
| | DN _E | 15 – 150 |
| | DN _A | 15 – 150 |
| | Actual orifice diameter d ₀ [mm] | 12 – 92 |
| | Actual orifice area A ₀ [mm ²] | 113 – 6648 |
| Europa | | Coefficient of discharge K_{dr} |
| PED / DIN EN ISO 4126-1 | Approval-No. | 072020111Z0008/0/04 |
| | S/G | 0.13 |
| | L | The valve is component tested for liquids with thermal expansion. |
| Germany | | Coefficient of discharge α_w |
| PED / AD 2000-Merkblatt A2 Proportional safety valve | Approval-No. | TÜV SV 610 |
| | S/G | 0.13 |
| | L | The valve is component tested for liquids with thermal expansion. |
| China | | Coefficient of discharge α_w |
| AQSIQ | Approval-No. | For current Approval-No. see www.leser.com |
| | S/G | 0.13 |
| | L | The valve is component tested for liquids with thermal expansion. |
| Belarus | | Coefficient of discharge α_w |
| GOSPROMNAZADOR | Approval-No. | For current Approval-No. see www.leser.com |
| | S/G | 0.13 |
| | L | The valve is component tested for liquids with thermal expansion. |
| Classification societies | | |
| on request | | |

Information:

According to AD 2000-Merkblatt A2 Chap. 10.3, the discharge coefficient "... for normal or proportional safety valves, should not exceed the value $\alpha_w = 0.08$ for S/G or the value $\alpha_w = 0.05$ for L." Since the actual α_w value for liquids is below the requirements of the AD 2000-Merkblatt for the Series 429, it is not possible to accord a discharge coefficient α_w .

Capacities – Steam

Calculation of the capacity for saturated steam acc. to AD 2000-Merkblatt A2 with 10% overpressure.
Capacities at 1 bar and lower are calculated at 0.1 bar overpressure.

| Metric units | | AD 2000-Merkblatt A2 [kg/h] | | | | | | | | | | |
|--|--|-----------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| DN _i | | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 | 125 | 150 |
| DN _o | | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 | 125 | 150 |
| Actual orifice diameter d _o [mm] | | 12 | 18 | 18 | 18 | 23 | 29 | 37 | 46 | 60 | 74 | 92 |
| Actual orifice area A _o [mm ²] | | 113 | 254 | 254 | 254 | 416 | 661 | 1075 | 1662 | 2827 | 4301 | 6648 |
| LEO _{S/G} ^{*)} [inch ²] | | 0.023 | 0.053 | 0.053 | 0.053 | 0.086 | 0.137 | 0.222 | 0.343 | 0.584 | 0.889 | 1.374 |
| Set pressure [bar] | | Capacity [kg/h] | | | | | | | | | | |
| 1.5 | | 22 | 50 | 50 | 50 | 81 | 130 | 211 | 326 | 555 | 843 | 1304 |
| 2 | | 27 | 60 | 60 | 60 | 98 | 155 | 253 | 391 | 665 | 1012 | 1564 |
| 3 | | 35 | 79 | 79 | 79 | 130 | 206 | 336 | 519 | 883 | 1343 | 2076 |
| 4 | | 44 | 99 | 99 | 99 | 162 | 257 | 419 | 647 | 1101 | 1675 | 2589 |
| 5 | | 53 | 119 | 119 | 119 | 194 | 308 | 501 | 775 | 1318 | 2005 | 3099 |
| 6 | | 61 | 138 | 138 | 138 | 225 | 358 | 584 | 902 | 1534 | 2334 | 3608 |
| 7 | | 70 | 157 | 157 | 157 | 256 | 408 | 664 | 1026 | 1746 | 2655 | 4104 |
| 8 | | 78 | 176 | 176 | 176 | 288 | 458 | 746 | 1152 | 1960 | 2982 | 4609 |
| 9 | | 87 | 196 | 196 | 196 | 320 | 508 | 827 | 1278 | 2175 | 3308 | 5114 |
| 10 | | 96 | 215 | 215 | 215 | 351 | 558 | 909 | 1404 | 2389 | 3635 | 5618 |
| 12 | | 113 | 254 | 254 | 254 | 414 | 658 | 1072 | 1656 | 2818 | 4286 | 6625 |
| 14 | | 130 | 291 | 291 | 291 | 476 | 756 | 1231 | 1903 | 3238 | 4925 | 7612 |
| 16 | | 147 | 330 | 330 | 330 | 539 | 856 | 1394 | 2154 | 3665 | 5575 | 8617 |
| 18 | | 164 | 368 | 368 | 368 | 601 | 956 | 1557 | 2406 | 4093 | 6226 | |
| 20 | | 181 | 407 | 407 | 407 | 665 | 1056 | 1720 | 2658 | 4522 | 6879 | |
| 22 | | 198 | 444 | 444 | 444 | 726 | 1154 | 1878 | 2903 | 4938 | 7511 | |
| 24 | | 215 | 483 | 483 | 483 | 789 | 1254 | 2041 | 3155 | 5368 | 8165 | |
| 26 | | 232 | 522 | 522 | 522 | 852 | 1355 | 2205 | 3408 | 5798 | 8820 | |
| 28 | | 249 | 561 | 561 | 561 | 915 | 1455 | 2369 | 3662 | 6230 | 9477 | |
| 30 | | 267 | 600 | 600 | 600 | 979 | 1557 | 2534 | 3917 | 6663 | 10136 | |
| 32 | | 284 | 639 | 639 | 639 | 1043 | 1658 | 2699 | 4172 | | 10797 | |
| 34 | | | | | | | | | | | | |
| 36 | | | | | | | | | | | | |
| 38 | | | | | | | | | | | | |
| 40 | | | | | | | | | | | | |

^{*)} LEO S/G = LESER Effective Orifice steam/gases please refer to page 00/11
"How to use" capacity tables, refer to page 00/09

Capacities – Air

Calculation of the capacity for air acc. to AD 2000-Merkblatt A2 with 10% overpressure at 0 °C and 1013 mbar.
Capacities at 1 bar and below are calculated with 0.1 bar overpressure.

| Metric units | | AD 2000-Merkblatt A2 [m _n ³ /h] | | | | | | | | | | |
|--|---|---|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| DN _i | | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 | 125 | 150 |
| DN _o | | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 | 125 | 150 |
| Actual orifice diameter d _o [mm] | | 12 | 18 | 18 | 18 | 23 | 29 | 37 | 46 | 60 | 74 | 92 |
| Actual orifice area A _o [mm ²] | | 113 | 254 | 254 | 254 | 416 | 661 | 1075 | 1662 | 2827 | 4301 | 6648 |
| LEO _{S/G} ^{*)} [inch ²] | | 0.023 | 0.053 | 0.053 | 0.053 | 0.086 | 0.137 | 0.222 | 0.343 | 0.584 | 0.889 | 1.374 |
| Set pressure [bar] | Capacity [m _n ³ /h] | | | | | | | | | | | |
| 1.5 | | 27 | 60 | 60 | 60 | 98 | 156 | 253 | 391 | 666 | 1013 | 1565 |
| 2 | | 32 | 72 | 72 | 72 | 118 | 188 | 306 | 472 | 803 | 1222 | 1889 |
| 3 | | 43 | 97 | 97 | 97 | 159 | 252 | 410 | 634 | 1079 | 1641 | 2536 |
| 4 | | 54 | 122 | 122 | 122 | 199 | 316 | 515 | 796 | 1354 | 2060 | 3184 |
| 5 | | 65 | 147 | 147 | 147 | 239 | 381 | 620 | 958 | 1629 | 2479 | 3831 |
| 6 | | 76 | 171 | 171 | 171 | 280 | 445 | 724 | 1120 | 1905 | 2897 | 4478 |
| 7 | | 87 | 196 | 196 | 196 | 320 | 509 | 829 | 1281 | 2180 | 3316 | 5126 |
| 8 | | 98 | 221 | 221 | 221 | 361 | 574 | 934 | 1443 | 2455 | 3735 | 5773 |
| 9 | | 109 | 246 | 246 | 246 | 401 | 638 | 1038 | 1605 | 2731 | 4154 | 6420 |
| 10 | | 120 | 271 | 271 | 271 | 442 | 702 | 1143 | 1767 | 3006 | 4573 | 7068 |
| 12 | | 142 | 320 | 320 | 320 | 523 | 831 | 1353 | 2091 | 3557 | 5410 | 8362 |
| 14 | | 164 | 370 | 370 | 370 | 604 | 960 | 1562 | 2414 | 4107 | 6248 | 9657 |
| 16 | | 186 | 419 | 419 | 419 | 684 | 1088 | 1771 | 2738 | 4658 | 7086 | 10952 |
| 18 | | 208 | 469 | 469 | 469 | 765 | 1217 | 1981 | 3062 | 5209 | 7923 | |
| 20 | | 230 | 518 | 518 | 518 | 846 | 1345 | 2190 | 3385 | 5759 | 8761 | |
| 22 | | 252 | 568 | 568 | 568 | 927 | 1474 | 2400 | 3709 | 6310 | 9598 | |
| 24 | | 274 | 617 | 617 | 617 | 1008 | 1603 | 2609 | 4033 | 6861 | 10436 | |
| 26 | | 296 | 667 | 667 | 667 | 1089 | 1731 | 2818 | 4356 | 7411 | 11274 | |
| 28 | | 318 | 717 | 717 | 717 | 1170 | 1860 | 3028 | 4680 | 7962 | 12111 | |
| 30 | | 341 | 766 | 766 | 766 | 1251 | 1989 | 3237 | 5004 | 8513 | 12949 | |
| 32 | | 363 | 816 | 816 | 816 | 1332 | 2117 | 3447 | 5327 | | 13786 | |
| 34 | | 385 | 865 | 865 | 865 | 1413 | 2246 | 3656 | 5651 | | | |
| 36 | | 407 | 915 | 915 | 915 | 1494 | 2375 | 3865 | | | | |
| 38 | | 429 | 964 | 964 | 964 | 1575 | 2503 | 4075 | | | | |
| 40 | | 451 | 1014 | 1014 | 1014 | 1655 | 2632 | 4284 | | | | |

*) LEO S/G = LESER Effective Orifice steam/gases please refer to page 00/11
"How to use" capacity tables, refer to page 00/09

Capacities – water

Acc. to AD 2000-Merkblatt A2, the LESER safety valve type 427, 429 can be used for thermal expansion in spite of having no component testing for liquids. To calculate the water capacity table, a coefficient of discharge of $\alpha_w = 0.05$ was used.



Calculation of the capacity for water as per AD 2000-Merkblatt A2 with 10% overpressure at 20 °C.
Capacities at 1 bar and below are calculated with 0.1 bar overpressure.

| Metric units | | AD 2000-Merkblatt A2 [10^3kg/h] | | | | | | | | | | |
|--|--|--|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| DN | | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 | 125 | 150 |
| DN _o | | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 | 125 | 150 |
| Actual orifice diameter d ₀ [mm] | | 12 | 18 | 18 | 18 | 23 | 29 | 37 | 46 | 60 | 74 | 92 |
| Actual orifice area A ₀ [mm ²] | | 113 | 254 | 254 | 254 | 416 | 661 | 1075 | 1662 | 2827 | 4301 | 6648 |
| LEO _L ^{*)} [inch ²] | | 0.009 | 0.020 | 0.020 | 0.020 | 0.033 | 0.053 | 0.085 | 0.132 | 0.225 | 0.342 | 0.528 |
| Set pressure [bar] | | Capacity [10^3kg/h] | | | | | | | | | | |
| 1.5 | | 0.30 | 0.67 | 0.67 | 0.67 | 1.09 | 1.73 | 2.81 | 4.34 | 7.39 | 11.2 | 17.4 |
| 2 | | 0.34 | 0.77 | 0.77 | 0.77 | 1.25 | 1.99 | 3.24 | 5.02 | 8.53 | 13.0 | 20.1 |
| 3 | | 0.42 | 0.94 | 0.94 | 0.94 | 1.54 | 2.44 | 3.97 | 6.14 | 10.4 | 15.9 | 24.6 |
| 4 | | 0.48 | 1.09 | 1.09 | 1.09 | 1.77 | 2.82 | 4.59 | 7.09 | 12.1 | 18.4 | 28.4 |
| 5 | | 0.54 | 1.21 | 1.21 | 1.21 | 1.98 | 3.15 | 5.13 | 7.93 | 13.5 | 20.5 | 31.7 |
| 6 | | 0.59 | 1.33 | 1.33 | 1.33 | 2.17 | 3.45 | 5.62 | 8.69 | 14.8 | 22.5 | 34.7 |
| 7 | | 0.64 | 1.44 | 1.44 | 1.44 | 2.35 | 3.73 | 6.07 | 9.38 | 16.0 | 24.3 | 37.5 |
| 8 | | 0.68 | 1.54 | 1.54 | 1.54 | 2.51 | 3.99 | 6.49 | 10.0 | 17.1 | 26.0 | 40.1 |
| 9 | | 0.72 | 1.63 | 1.63 | 1.63 | 2.66 | 4.23 | 6.88 | 10.6 | 18.1 | 27.5 | 42.6 |
| 10 | | 0.76 | 1.72 | 1.72 | 1.72 | 2.80 | 4.46 | 7.26 | 11.2 | 19.1 | 29.0 | 44.9 |
| 12 | | 0.84 | 1.88 | 1.88 | 1.88 | 3.07 | 4.88 | 7.95 | 12.3 | 20.9 | 31.8 | 49.1 |
| 14 | | 0.90 | 2.03 | 2.03 | 2.03 | 3.32 | 5.27 | 8.58 | 13.3 | 22.6 | 34.3 | 53.1 |
| 16 | | 0.97 | 2.17 | 2.17 | 2.17 | 3.55 | 5.64 | 9.18 | 14.2 | 24.1 | 36.7 | 56.7 |
| 18 | | 1.02 | 2.30 | 2.30 | 2.30 | 3.76 | 5.98 | 9.73 | 15.0 | 25.6 | 38.9 | |
| 20 | | 1.08 | 2.43 | 2.43 | 2.43 | 3.96 | 6.30 | 10.3 | 15.9 | 27.0 | 41.0 | |
| 22 | | 1.13 | 2.55 | 2.55 | 2.55 | 4.16 | 6.61 | 10.8 | 16.6 | 28.3 | 43.0 | |
| 24 | | 1.18 | 2.66 | 2.66 | 2.66 | 4.34 | 6.90 | 11.2 | 17.4 | 29.6 | 45.0 | |
| 26 | | 1.23 | 2.77 | 2.77 | 2.77 | 4.52 | 7.19 | 11.7 | 18.1 | 30.8 | 46.8 | |
| 28 | | 1.28 | 2.87 | 2.87 | 2.87 | 4.69 | 7.46 | 12.1 | 18.8 | 31.9 | 48.6 | |
| 30 | | 1.32 | 2.97 | 2.97 | 2.97 | 4.86 | 7.72 | 12.6 | 19.4 | 33.0 | 50.3 | |
| 32 | | 1.37 | 3.07 | 3.07 | 3.07 | 5.02 | 7.97 | 13.0 | 20.1 | | 51.9 | |
| 34 | | 1.41 | 3.17 | 3.17 | 3.17 | 5.17 | 8.22 | 13.4 | 20.7 | | | |
| 36 | | 1.45 | 3.26 | 3.26 | 3.26 | 5.32 | 8.46 | 13.8 | | | | |
| 38 | | 1.49 | 3.35 | 3.35 | 3.35 | 5.47 | 8.69 | 14.1 | | | | |
| 40 | | 1.53 | 3.43 | 3.43 | 3.43 | 5.61 | 8.91 | 14.5 | | | | |

^{*)} LEO_L = LESER Effective Orifice liquids please refer to page 00/11

"How to use" capacity tables, refer to page 00/09

Accessories and Options

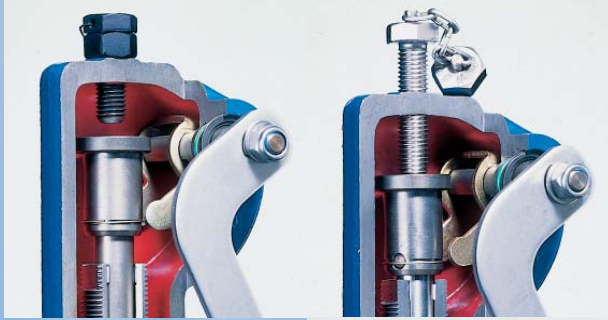


Contents

Chapter/Page


| | |
|---------------------|-------|
| Overview | 99/02 |
| Caps and levers | 99/04 |
| Metal seat | 99/06 |
| Disc with soft seal | 99/08 |
| Soft seal disc | 99/10 |
| Disc | 99/11 |
| Balanced bellows | 99/12 |
| Heating jacket | 99/14 |
| O-ring damper | 99/16 |
| Elastomer bellows | 99/18 |
| Lift indicator | 99/19 |
| Lift stoppers | 99/20 |

Overview

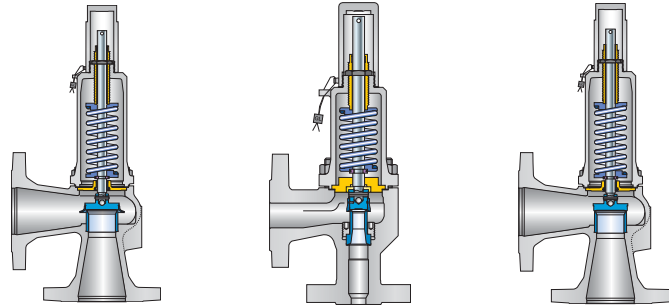

| Options | | Type | Option code | 431, 433 | 431, 433 PN 160 | 427, 429 |
|-----------------------------------|------------|--|----------------------------|------------|-----------------|------------|
| Disc (item 7): | | | | | | |
| | | Disc with detachable lifting aid | J26 | ✓ | * | * |
| | | Bull race disc | J24 | ✓ | ✓ | ✓ |
| Seal type (item 5 and 7) | | | | | | |
| Metal seat | | Disc 1.4404 | L44 | ✓ | ✓ | ✓ |
| | | Disc 1.4404 stellite | J25 | ✓ | ✓ | ✓ |
| Soft seal | O-Ring | CR "K" | J21 | ✓ | ✓ | ✓ |
| | | NBR "N" | J30 | ✓ | ✓ | ✓ |
| | | EPDM "D" | J22 | ✓ | ✓ | ✓ |
| | | FKM "L" | J23 | ✓ | ✓ | ✓ |
| | | FFKM "C" | J20 | ✓ | ✓ | ✓ |
| | | Sealing plate | SP "T" | J49 | ✓ | on request |
| PCTFE "G" | J48 | | ✓ | on request | – | |
| PTFE "A" | J44 | | ✓ | on request | – | |
| Bellows (item 15, item 70) | | | | | | |
| Open bonnet | | Standard bellows | J68 | ✓ | ✓ | ✓ |
| | | Low pressure bellows | J68J63 | ✓ | – | ✓ |
| Bonnet closed | | Standard bellows | J78 | ✓ | ✓ | ✓ |
| | | Low pressure bellows | J78J63 | ✓ | – | ✓ |
| | | Other materials | J25 + Material name | ✓ | ✓ | ✓ |
| Elastomer bellows | | EPDM | J79 | ✓ | – | ✓ |
| | | NBR | J87 | ✓ | – | ✓ |
| Caps and levers (item 40) | | | | | | |
| | | H2 | | ✓ | ✓ | ✓ |
| | | H3 | | ✓ | ✓ | ✓ |
| | | H4 | | ✓ | ✓ | ✓ |
| Spring (item 54) | | | | | | |
| | | High temperature alloy 1.8159 / 1.7102 | X01 | ✓ | ✓ | ✓ |
| | | Stainless steel 1.4310 | X04 | ✓ | ✓ | ✓ |


Overview

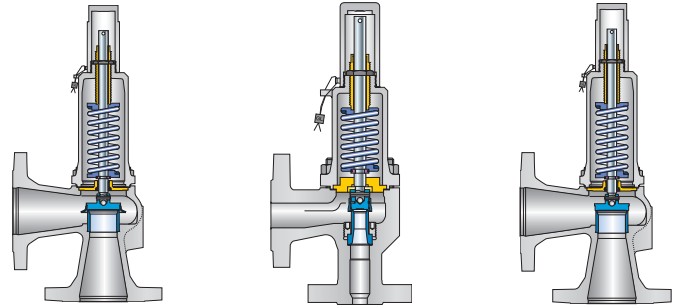


| Options | | Type | Option code | 431, 433 | 431, 433 PN 160 | 427, 429 |
|--------------------------------|-----------------------|------|---------------|----------|-----------------|----------|
| Test gag | | | | | | |
| | H2 | | J70 | ✓ | ✓ | ✓ |
| | H4 | | J69 | ✓ | ✓ | ✓ |
| Bonnet (item 9) | | | | | | |
| | closed | | | ✓ | ✓ | ✓ |
| | open | | | ✓ | ✓ | ✓ |
| Heating jacket | | | | | | |
| | | | | ✓ | ✓ | ✓ |
| Lift indicator | | | | | | |
| | Lifting device H2, H4 | | J39J93 | ✓ | ✓ | ✓ |
| Lift stoppers | | | | | | |
| | Bush | | J51 | ✓ | ✓ | ✓ |
| | Gag H2 | | J52 | ✓ | ✓ | ✓ |
| | Gag H4 | | J50 | ✓ | ✓ | ✓ |
| Drain hole | | | | | | |
| | G 1/4 | | J18 | ✓ | ✓ | ✓ |
| | G 1/2 | | J19 | ✓ | ✓ | ✓ |
| O-ring damper (item 40) | | | | | | |
| | H2 | | H65 | ✓ | ✓ | ✓ |
| | H4 | | H66 | ✓ | ✓ | ✓ |
| Bursting disc | | | | | | |
| | H2 | | | ✓ | ✓ | ✓ |

Caps and levers – subassembly item 40


Cap H2

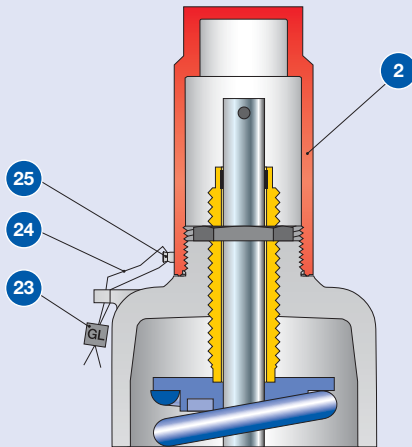

Packed lever H4


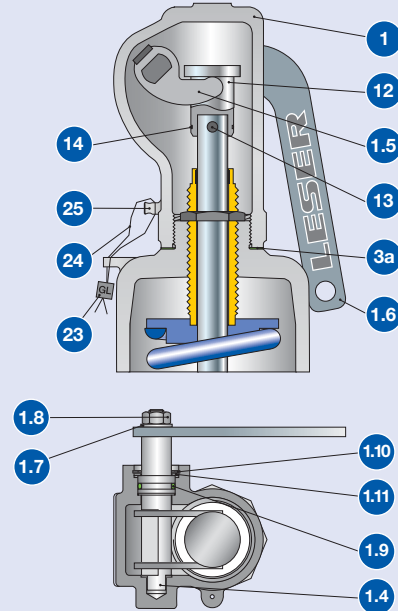


Plain lever H3

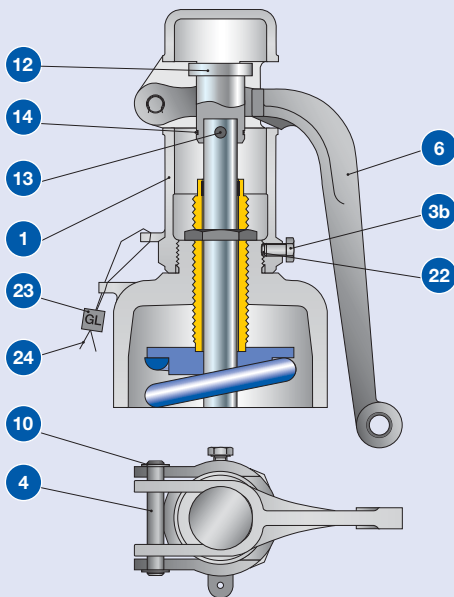

Test gag

Cap H2: J70
Packed lever H4: J69

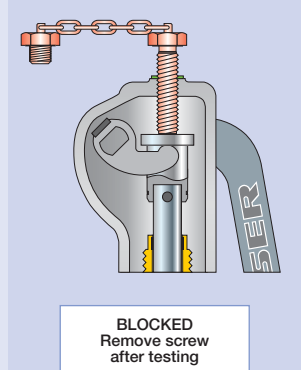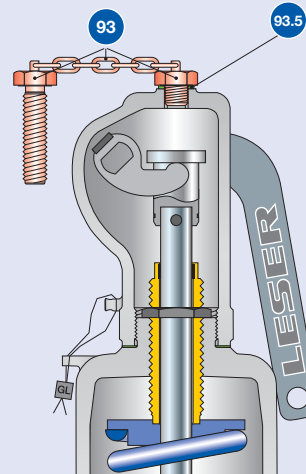

Test gag

The test gag prevents the spindle from lifting and keeps the safety valve tight while the system pressure exceeds the set pressure.

The test gag is used to:

- perform the pressure test in a system without disassembling the safety valve
- be able to make an adjustment to each individual valve in systems with multiple safety valves

The test gag must be removed after testing, otherwise the safety valve will not protect the system against impermissible overpressure.

Caps and levers – subassembly item 40

| Materials | | Steel | | | Stainless steel | |
|-----------|----------------------|---------|----------------|-----------------|-----------------|-----------------|
| Item. | Component | Cap H2 | Plain lever H3 | Packed lever H4 | Cap H2 | Packed lever H4 |
| 1 | Lever cover | – | 0.7040 | 0.7040 | – | 1.4408 |
| | | – | Gr. 60-40-18 | Gr. 60-40-18 | – | CF8M |
| 2 | Cap | 1.0718 | – | – | 1.4404 | – |
| | | Steel | – | – | 316L | – |
| 3a | Spacer | – | – | 1.4571 | – | 1.4571 |
| | | – | – | 316Ti | – | 316Ti |
| 3b | Hex screw | – | 1.4401 | – | – | – |
| | | – | B8M | – | – | – |
| 4 / 1.4 | Shaft / bolt | – | 1.4021 | 1.0718 | – | 1.4404 |
| | | – | 420 | Steel | – | 316L |
| 1.5 | Lifting fork | – | – | 1.0531 | – | 1.4571 |
| | | – | – | Steel | – | 316Ti |
| 6 / 1.6 | Lever | – | 0.7040 | 1.0036 | – | 1.4301 |
| | | – | Gr. 60-40-18 | Steel | – | 304 |
| 1.7 | Washer | – | – | 1.4401 | – | 1.4301 |
| | | – | – | 316 | – | 304 |
| 1.8 | Nut | – | – | A2/Poly | – | 1.4401 |
| | | – | – | 2H | – | 8M |
| 1.9 | O-Ring | – | – | FKM | – | – |
| | | – | – | FKM | – | – |
| 1.9 | Packing ring precast | – | – | – | – | Graphite |
| | | – | – | – | – | Graphite |
| 10 / 1.10 | Retaining clip | – | Carbon steel | Carbon steel | – | – |
| | | – | Carbon steel | Carbon steel | – | – |
| 1.10 | Nut | – | – | – | – | 1.4104 |
| | | – | – | – | – | Chrome steel |
| 1.10 | Packing gland | – | – | – | – | 1.4404 |
| | | – | – | – | – | 316L |
| 1.11 | Support ring | – | – | Carbon steel | – | – |
| | | – | – | Carbon steel | – | – |
| 12 | Spindle cap | – | 1.0718 | 1.0718 | – | 1.4404 |
| | | – | Carbon steel | Carbon steel | – | 316L |
| 13 | Pin | – | Steel | Steel | – | 1.4401 |
| | | – | Steel | Steel | – | 8M |
| 14 | Securing ring | – | 1.4571 | 1.4571 | – | 1.4571 |
| | | – | 316Ti | 316Ti | – | 316Ti |
| 22 | Plug | – | Plastic | – | – | – |
| | | – | Plastic | – | – | – |
| 23 | Seal | Plastic | Plastic | Plastic | Plastic | Plastic |
| | | Plastic | Plastic | Plastic | Plastic | Plastic |
| 24 | Seal wire | 1.4541 | 1.4541 | 1.4541 | 1.4541 | 1.4541 |
| | | 321 | 321 | 321 | 321 | 321 |
| 25 | Sealing nose | 1.4435 | – | – | 1.4435 | 1.4435 |
| | | 316L | – | – | 316L | 316L |
| 93 | Test gag | 1.4401 | – | 1.4401 | 1.4401 | 1.4401 |
| | | B8M | – | B8M | B8M | B8M |
| 93.5 | Washer | Fiber | – | Fiber | Fiber | Fiber |
| | | Fiber | – | Fiber | Fiber | Fiber |


Note:

- LESER reserves the right to make changes
- LESER may use higher quality materials without giving prior information
- Each component can be constructed of another material according to the customer's specification.

Metal seat – seat / nozzle, item 5 and disc subassembly item 7

With LESER, the metal seat surfaces (disc and seat) are optically lapped planar to guarantee high seal tightness. LESER safety valves are delivered with a standard seal tightness acc. to API 527.

Improved tightness (Option code J86) is available on request.

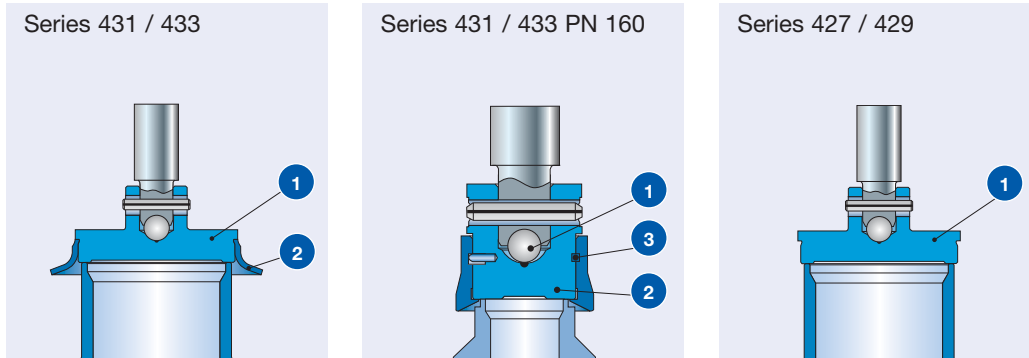


Stellited sealing surface

The sealing surfaces of stainless steel discs and seats / nozzles can be stellited by weld cladding. Stellite is a cobalt-chrome non-ferrous alloy with increased hardness, corrosion resistance, and abrasion resistance even at high temperatures.

LESER recommends stellited sealing surfaces for Modulate Action safety valves (seat / nozzle and disc (1.4404 / 316L)) in the following applications:

- for high-pressure applications with highly stressed sealing surfaces
- for high-temperature applications in order to prevent permanent deformation of the sealing surface as a consequence of the material properties of the seat and disc
- use with abrasive media in order to increase the abrasion resistance of the sealing surface

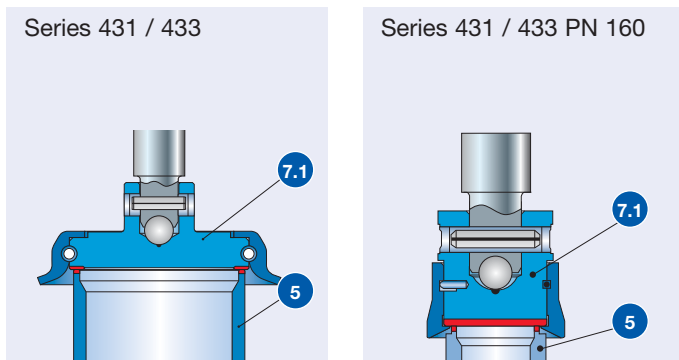

Materials for disc and seat / nozzle, see page 99/09.

| Hardness | | Metal seat | | |
|-----------------------------|------------------------|---|------------------------------|-----------------------------------|
| Material | | Hardness of the sealing surface | | |
| EN | ASME | Value according to standard or manufacturer specification | | Mean value LESER bearing material |
| EN 10088-3, 1.4122 hardened | Chrome steel, hardened | ≥ 40 HRC | LWN 325.01 hardening process | 42 – 46 HRC |
| EN 10272, 1.4404 | SA 479 316L | ≤ 215 HBW | EN 10272 Table 7 | 16 – 19 HRC ¹⁾ |
| EN 10272, 1.4404 stellited | SA 479 316L stellited | ≥ 35 HRC | Manufacturer specification | 40 HRC |

HBW: BRINELL hardness acc. to DIN EN ISO 6506-1 / HRC: ROCKWELL hardness acc. to DIN EN ISO 6508-1

¹⁾ Rockwell hardnesses less than 20 HRC are not approved by the standard. LESER gives these values for better comparability.

Metal seat – seat / nozzle, item 5 and disc subassembly item 7

Standard and corrosiv service

| Materials | | Disc – subassembly item 7 | |
|------------------------------|-------------|---------------------------|-----------------|
| Item | Component | Steel | Stainless steel |
| Type 431 / 433 | | | |
| 1 | Disc | 1.4122 hardened | 1.4404 |
| | | Hardened stainless steel | 316L |
| 2 | Lifting aid | 1.4404 | 1.4404 |
| | | 316L | 316L |
| Type 431 / 433 PN 160 | | | |
| 1 | Disc | 1.4122 hardened | 1.4404 |
| | | Hardened stainless steel | 316L |
| 2 | Lifting aid | 1.4104 | 1.4404 |
| | | Chrome steel | 316L |
| 3 | Circlip | 1.4571 | 1.4571 |
| | | 316Ti | 316Ti |
| Series 427 / 429 | | | |
| 1 | Disc | 1.4122 hardened | 1.4404 |
| | | Hardened stainless steel | 316L |

| Materials | | Seat / nozzle item 5 | |
|-------------------|---------------|----------------------|-----------------|
| Item | Component | Steel | Stainless steel |
| All series | | | |
| 5 | Seat / nozzle | | 1.4404 |

Stellited sealing surface

| Materials | | Seat / nozzle item 5, disc item 7 | |
|---|---------------|-----------------------------------|------------------|
| Item | Component | Option code | |
| Type 431 / 433, 431 / 433 PN 160 | | | |
| 7.1 | Disc | J25 | 1.4404 stellited |
| | | | 316L stellited |
| 5 | Seat / nozzle | L61 / L62 | 1.4404 stellited |
| | | | 316L stellited |

Disc with soft seal – subassembly item 7

LESER soft seals provide increased seal tightness for your application.

Construction features

- Different constructions for an expanded range of applications
- Large selection of soft seal materials for almost any application, and custom made for the respective customer requirement
- The increased service life of the seal compared to metal seats reduces the service costs.
- An easier and faster replacement of the soft seal reduces service costs.
- Standard ARP O-ring dimensions facilitate easy worldwide procurement.
- A standard hardness for each O-ring material for all set pressures simplifies the stocking of spare parts and reduces warehousing costs.

| Design of soft seal | | | O-ring disc | | | | | |
|---------------------|-----|-----|--------------|--|---------------|--|----------------|--|
| Type | | | 431 / 433 | | 433 PN 160 | | 427 / 429 | |
| Nominal size | | | DN 15 | | DN 15 | | DN 20 – DN 150 | |
| Pressure range | | | 0.3 – 40 bar | | 0.2 – 160 bar | | 1.5 – 40 bar | |
| Option code | | | | | | | | |
| CR | “K” | J21 | | | | | | |
| EPDM | “D” | J22 | | | | | | |
| FKM | “L” | J23 | | | | | | |
| FFKM | “C” | J20 | | | | | | |

For temperature application limits, media resistance, and option codes, see selection table on page 99/10.
Materials for soft sealing disc, see page 99/09

| Materials | | Disc – subassembly item 7 | | | | | | | |
|---|----------|---------------------------|------|---------------|--------|----------------|----------|--------|------|
| Type | | 431 / 433 | | 433 PN 160 | | 427 / 429 | | | |
| | | DN 15 | | DN 15 | | DN 20 – DN 150 | | | |
| | | 0.3 – 40 bar | | 0.2 – 160 bar | | 1.5 – 40 bar | | | |
| Disc | Item 7.1 | 1.4404 | 316L | Item 7.1 | 1.4404 | 316L | Item 7.1 | 1.4404 | 316L |
| Retainer | Item 7.3 | 1.4404 | 316L | – | | – | Item 7.3 | 1.4404 | 316L |
| Soft seal Materials, see page 99/10 | Item 7.4 | O-ring | | Item 7.5 | O-ring | | Item 7.4 | O-ring | |
| Lifting aid | | see Item 7.1 | | Item 7.2 | 1.4404 | 316L | – | | – |
| Nut | Item 7.5 | 1.4401 | 8M | – | | – | Item 7.5 | 1.4401 | 8M |

For temperature application limits, media resistance and option codes, see selection table on page 04/08.

Soft seal disc – subassembly item 7

| Construction | | Disc with sealing plate | | |
|--------------|-----|-------------------------|------------|---------------|
| Type | | 431 / 433 | 433 PN 160 | 427 / 429 |
| Option code | | Pressure range | | |
| SP: "T" | J49 | 10 – 40 bar | – | – |
| PCTFE: "G" | J48 | 1.0 – 30 bar | – | – |
| PTFE: "A" | J44 | 1.0 – 10 bar | – | – |
| Design | | | | On request |
| | | | | Not available |

| Materials | | Disc – subassembly item 7 | | |
|--|----------|---------------------------|--------------------------------|--------------------------------|
| Type | | 431 / 433 | 433 PN 160 | 427 / 429 |
| | | DN 15 0.3 – 40 bar | DN 20 – DN 150 0.2 – 40 bar | DN 15 0.2 – 160 bar |
| | | | | DN 20 – DN 150 1.5 – 40 bar |
| Disc | Item 7.1 | 1.4404 | – | – |
| | | 316L | – | – |
| Retainer | Item 7.3 | 1.4404 | – | – |
| | | 316L | – | – |
| Soft seal Materials, see page 99/10 | Item 7.4 | Sealing plate | – | – |
| | | | – | – |
| Lifting aid | | see Item 7.1 | – | – |
| | | – | – | – |
| Nut | Item 7.5 | 1.4401 | – | – |
| | | 8M | – | – |

For temperature application limits, media resistance and option codes, see selection table on page 04/08.

Soft seal

| Soft seal selection | | | | | | |
|----------------------------|---|------------------------------|---|------------------|------------------|---|
| Abbreviation ASTM 14 | Trade name (Designation) | Code letter ¹⁾ | Option code | T _{min} | T _{max} | Application ²⁾ |
| | | | | [°C] | [°C] | |
| O-Ring | | | | | | |
| CR | Neoprene® | K | J21 | -40 | 100 | Paraffins, mineral oils, silicon oils and greases, water and aqueous solutions, refrigerants, ozone |
| NBR | Buna-N® (Nitrile-Butadiene) | N | J30 | -25 | 100 | Hydraulic oils, plant and animal fats and oils |
| EPDM | Buna-EP (Ethylene-Propylene-Diene) | D | J22 | -45 | 150 | Hot water and hot steam up to 150 °C, 302 °F, many organic and inorganic acids, silicon oils and greases FDA conforming compound |
| FKM | Viton® (Fluorocarbon) | L | J23 | 20 | 180 | High temperatures (not hot steam), mineral oils and greases, silicon oils and greases, plant and animal oils and fats, ozone FDA conforming compound on request |
| FFKM | Kalrez® (Perfluor) | C | J20 | 0 | 250 | Almost all chemicals, standard compound is Kalrez® 6375 with steam resistance FDA conforming compound on request |
| Sealing plate | | | | | | |
| SP | VESPEL SP-1® ³⁾ (Polyimide) | T | J49 | -270 | 300 | High-temperature and high-pressure applications (no steam), chemical resistance, see manufacturer's specifications |
| PCTFE | KEL-F® (Polychlorotri-fluoroethylene) | G | J48 | -270 | 204 | Low-temperature and refrigeration system applications, flammable media, gaseous acid up to 50 bar, 725 psig at 60 °C, 140 °F |
| PTFE | Teflon® (Polytetrafluoro-ethylene) | A | J44 | -184 | 150 | Almost all chemicals |
| Other not listed materials | | X | For other materials, please contact your local representative or sales@leser.com. | | | |

¹⁾ The code letters are stamped on the disc (Item 1)

²⁾ The pressure and temperature application range must be observed in all cases. The chemical resistance is based on specifications from the soft seal manufacturer. LESER assumes no guarantee.

³⁾ Only for DN 25, 1" x 2".

Disc – subassembly item 7

Disc with detachable lifting aid

A detachable lifting aid can be supplied for the valve disc on request as a variation of the standard disc with an integrally fixed lifting aid. The benefit of the detachable lifting aid is the easy re-lapping of the disc sealing surface on one disc.

This makes it possible to have fast maintenance of the safety valve on site.

The detachable lifting aid is standard with safety valves of type 431 / 433 PN 160.

| Construction | | | |
|--------------|----------|-----------------|-----------------------------------|
| Type | 431, 433 | 431, 433 PN 160 | 427, 429 |
| Construction | | | Safety valves without lifting aid |
| Option code | J26 | * | – |

| Materials | | Disc with detachable lifting aid | |
|--------------------------------|-------------|---|---------------------------|
| Item | Name | Steel | Stainless steel |
| Series 431 / 433 | | | |
| 1 | Disc | 1.4122 hardened Hardened stainless steel | 1.4404 316L |
| 2 | Lifting aid | 1.4581 CF10M | 1.4581 CF10M |
| 3 | Roll pin | 1.4310 Stainless steel | 1.4310 Stainless steel |
| Series 431 / 433 PN 160 | | | |
| 1 | Disc | 1.4122 hardened Hardened stainless steel | 1.4404 316L |
| 2 | Lifting aid | 1.4104 Chrome steel | 1.4404 316L |
| 3 | Circlip | 1.4571 316Ti | 1.4571 316Ti |

Bull race disc

To prevent damages to the sealing surfaces from frequent disassembly, in particular for safety valves with short or regular service intervals, the disc can be supplied in a bull race construction as a custom design.

| Construction | | | |
|--------------|----------|-----------------|----------|
| Type | 431, 433 | 431, 433 PN 160 | 427, 429 |
| Construction | | | |
| Option code | J24 | J24 | J24 |

Balanced bellows – subassembly item 15


LESER offers a balanced bellows design for safety valves.

- Balanced bellows are used for two areas of applications:
- for compensation of the effect of back pressure
 - for reliable sealing of the bonnet against the blow-off chamber

Compensation of the effect of back pressure

The back pressure exerted on the back of the disc causes a force in the closing direction (F_C). The actual amount of the force is dependent on the diameter of the seat and the amount of back pressure. The balanced bellows forms a surface opposite the seat that matches the seat area. The back pressure also affects this surface and creates pressure F_O in the opening direction, which compensates for the force in the closing direction F_C .

The combination of the forces is shown in the following table:

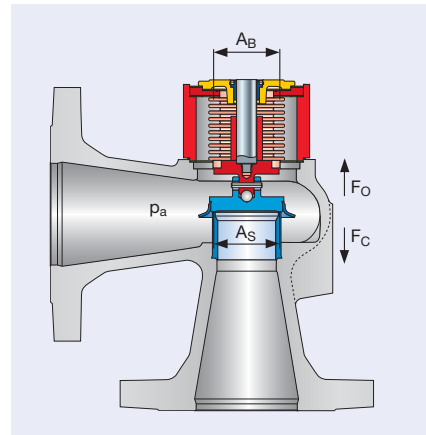

| Effective area | Back pressure | Effective force | Direction of force | Compensation curves |
|----------------------|---------------|------------------------|--------------------|---------------------|
| Seat area = A_S | p_a | $F_C = p_a \times A_S$ | closing | $A_S = A_B$ |
| Bellows area = A_B | p_a | $F_O = p_a \times A_B$ | opening | $F_C = F_O$ |

Sealing the bonnet from the outlet chamber

LESER's balanced bellows seal the spring chamber to the blow-off chamber. That way, they protect the guides, moving parts, and the spring against media-related affects such as dirt, corrosion, impurities, and also temperature.

Balanced bellows

| Type | 431 / 433 | 431 / 433 PN 160 | 427 / 429 |
|-----------------|-----------|------------------|-----------|
| Design | | | |
| Bonnet spacer | * | * | * |
| Bellows housing | - | * | - |

The shield protects the bellows against flow turbulence when blowing off the valve. Vibrations in the bellows are reduced. This guarantees a longer service life of the bellows.

| | | | | |
|----------------|-----------------------|---|---|---|
| Control thread | DIN ISO 228-1, G 1/4 | * | * | * |
| | ASME B1.20.1 NPT 1/2" | ✓ | ✓ | ✓ |

To check the effectiveness of the bellows, an inspection connection G 1/4 is inserted into the bonnet as per DIN ISO 228-1. For safe discharge, especially of aggressive, toxic media, a discharge pipe G 1/4 can be installed if necessary.

Option code

| | | | | |
|---------------|-------------------------|---------------------|---------------------|---------------------|
| Bonnet open | Standard bellows | J68 | J68 | J68 |
| | Low pressure bellows | J68, J63 | - | J68, J63 |
| | Special materials | S15 + material name | S15 + material name | S15 + material name |
| Bonnet closed | Standard bellows | J78 | J78 | J78 |
| | Low pressure bellows | J78, J63 | - | J78, J63 |
| | Special materials | S15 + material name | S15 + material name | S15 + material name |
| | Control thread NPT 1/2" | J95 | J95 | J95 |

The following information can be found on the respective pages of the selected valve:

- dimensions and weights, see "Dimensions and weights" table
- set pressure, see "Pressure temperature ratings" table
- temperature ranges, see "Pressure temperature ratings" table

Balanced bellows – subassembly item 15

| Materials | | Standard bellows |
|-----------|---------------|--|
| Item | Component | 431 / 433, 431 / 433 PN 160, 427 / 429 |
| 15.1 | Lower adaptor | 1.4404 316L |
| 15.2 | Upper adaptor | 1.4404 316L |
| 15.3 | Bellows | 1.4571 316Ti |
| 11 | Bonnet spacer | 1.4404 316L |
| 55 | Stud | 1.4401 B8M |
| 60 | Gasket | Graphite / 1.4401 Graphite / 316 |

Bellows made of Hastelloy® or other special materials are available on request.

Balanced bellows conversion kits

With the LESER bellows conversion set, conventional construction safety valves can be converted to a balanced bellows design quickly and easily. The conversion set contains all the components needed for the conversion as well as a conversion guide.

| Conversion kits | | | | |
|-----------------|---------------------------|------------------------------|-------------------------------------|------------|
| Item | Component | No. | Materials | Remark |
| 8 | Guide | 1 | 1.4404 316L | |
| 11 | Bonnet spacer | 1 | 1.4404 316L | |
| 12 | Spindle | 1 | 1.4404 316L | |
| 15 | Bellows | 1 | 1.4571 316Ti | |
| 55 | Stud | 4, 8 dependant on valve size | 1.4401 B8M | |
| 60 | Gasket | 2, 3 dependant on valve size | Graphite / 1.4401 Graphite / 316 | |
| | Installation Instructions | 1 | | LWN 037.05 |

Article numbers and spare parts, see the “Spare parts” section of the respective valve type.

Heating jacket

Application and construction

To protect systems with viscous, crystallising or sticky media, LESER offers a heating jacket.

The heating jacket has a welded design and covers the angle type body such that it allows the hot media (steam, oil, and so on) to flow through the created space.

In order to protect the spindle and moving parts against sticking, a safety valve with a balanced bellows construction should be chosen for the heating jacket construction.

For safety valves with balanced bellows, the bonnet spacer needed to accommodate the bellows is equipped with an additional heating jacket. Both heating jackets are joined by a threaded pipe bend.

If there is no danger of the medium setting in the blowoff chamber of the valve, then the balanced bellows don't have to be used. The position of the heating connections is shown in figures 1 to 3.




Specification for the heating jacket

The operating data of the heating jacket is placed on an additional heating jacket rating plate on the heating jacket.

Slip-on flange

Heating connections with flanges are designed for better orientation than slip-on flanges

Nominal pressure rating: PN 25 as per EN 1092-1
Class 150 as per ANSI 16.5

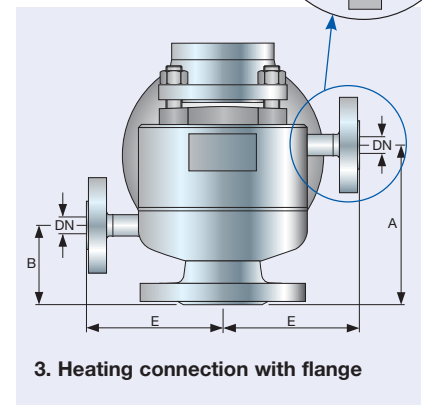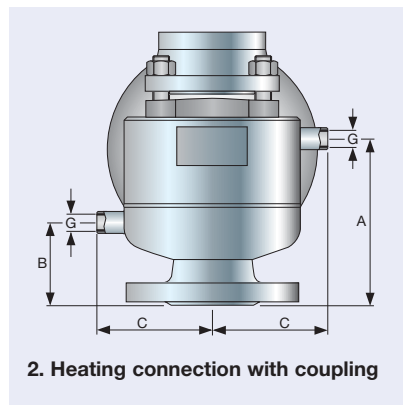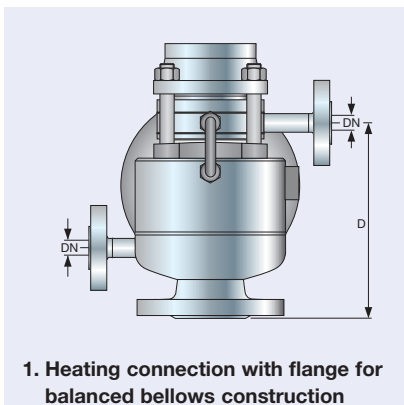

Heating jacket

| Heating jacket | | DN _i | 15 | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 | 125 | 150 | |
|---|-------------|-----------------|-------------------------------|-------------|-------------|---------|-----------------|-----------------|---------------|---------------------------|---------------------------|-------------------------------|---------|---------|---|
| Inlet valve size | | | 1/2" x 1/2" | 1/2" x 1/2" | 3/4" x 3/4" | 1" x 1" | 1 1/4" x 1 1/4" | 1 1/2" x 1 1/2" | 2" x 2" | 2 1/2" x 2 1/2" | 3" x 3" | 4" x 4" | 5" x 5" | 6" x 6" | |
| Actual orifice diameter d ₀ [mm] | | | 12 | 12 | 18 | 18 | 18 | 23 | 29 | 37 | 46 | 60 | 74 | 92 | |
| Materials | | | | | | | | | | | | | | | |
| Body | | Series 429, 433 | 1.4408 | 1.4408 | 1.4408 | 1.4408 | 1.4408 | 1.4408 | 1.4408 | 1.0619 optional 1.4408 | 1.0619 optional 1.4408 | 1.0619 optional 1.4408 | - | - | |
| Heating jacket | | | | | | | | | 1.4541 321 | | | | | | |
| Connections | | | | | | | | | | | | | | | |
| Slip-on flange DIN | Option code | DN 15, PN 25 | 1.4571, 1.4404 316Ti, 316L | | | | | | | | | - | - | - | - |
| | H 31 | | | | | | | | | | | | | | |
| Slip-on flange ANSI | Option code | DN 25, PN 25 | - | | | | | | | | | 1.4571, 1.4404 316Ti, 316L | - | - | |
| | H 32 | | | | | | | | | | | | | | |
| Slip-on flange ANSI | Option code | 1/2", CL150 | 1.4404 316L | | | | | | | | | - | - | - | - |
| | K 31 | | | | | | | | | | | | | | |
| Coupling DIN 2986 | Option code | 1", CL150 | - | | | | | | | | | 1.4404 316L | - | - | |
| | K 32 | | | | | | | | | | | | | | |
| Heating jacket Bonnet spacer | Option code | G 3/8" | 1.4571 316Ti | | | | | | | | | - | - | - | - |
| | H 29 | | | | | | | | | | | | | | |
| Heating jacket Bonnet spacer | Option code | G 3/4" | - | | | | | | | | | 1.4571 316Ti | - | - | |
| | H 30 | | | | | | | | | | | | | | |
| Heating jacket Bonnet spacer | Option code | | 1.4404 316L | | | | | | | | | - | - | | |
| | H 33 | | | | | | | | | | | | | | |

| Metric units | | DN _E | 15 | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 | 125 | 150 |
|---|-------------------|--------------------------|-------------|-------------|-------------|---------|-----------------|-----------------|---------|-----------------|---------|---------|---------|---------|
| Inlet valve size | | | 1/2" x 1/2" | 1/2" x 1/2" | 3/4" x 3/4" | 1" x 1" | 1 1/4" x 1 1/4" | 1 1/2" x 1 1/2" | 2" x 2" | 2 1/2" x 2 1/2" | 3" x 3" | 4" x 4" | 5" x 5" | 6" x 6" |
| Actual orifice diameter d ₀ [mm] | | | 12 | 12 | 18 | 18 | 18 | 23 | 29 | 37 | 46 | 60 | 74 | 92 |
| Series 433, 429 | | | | | | | | | | | | | | |
| | | Dimensions | | | | | | | | | | | | |
| [mm] | A | 95 | 95 | 95 | 95 | 105 | 120 | 130 | 150 | 170 | 165 | - | - | |
| | B | 65 | 65 | 65 | 65 | 65 | 75 | 75 | 80 | 80 | 80 | - | - | |
| | C | 83 | 83 | 83 | 83 | 95 | 95 | 95 | 110 | 120 | 145 | - | - | |
| | D | 131 | 131 | 130 | 134 | 142 | 163 | 180 | 209 | 224 | 300 | - | - | |
| | E | 110 | 110 | 110 | 110 | 120 | 121 | 121 | 136 | 150 | 176 | - | - | |
| [inch] | Slip-on flange DN | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 25 | 25 | - | - |
| | Coupling G | 3/8 | 3/8 | 3/8 | 3/8 | 3/8 | 3/8 | 3/8 | 3/8 | 3/8 | 3/4 | 3/4 | - | - |
| Series 433, 429 | | | | | | | | | | | | | | |
| | | Operating pressure [bar] | | | | | | | | | | | | |
| Operating temperature | 20°C | 25 | 25 | 25 | 25 | 25 | 25 | 25 | 25 | 15 | 15 | 15 | - | - |
| | 300°C | 18 | 18 | 18 | 18 | 18 | 18 | 18 | 18 | 11 | 11 | 11 | - | - |

O-ring damper – subassembly item 40

The O-ring damper successfully prevents or reduces the vibrations of the moving parts of a safety valve.

Background:

In each safety valve, the moving parts – the disc, spindle, bottom spring plate and spring – form a so-called spring-mass-system. As in all spring-mass-systems, the components can be stimulated to start vibrating under unfavourable conditions (e.g. loss of inlet pressure). Vibrations can also be triggered by external units and then transferred to the safety valve via the mechanical connection or the medium. In the event of resonances, the safety valve opens and closes in an uncontrolled way at a high frequency and can't discharge the accorded mass flow.

In general, there are two types of uncontrolled vibrations (definition as per ASME PTC 25-2001, Chapter 2.7):



Chatter: “Abnormal rapid reciprocating motion of the movable parts of a pressure relief valve in which the disc contacts the seat.” The reasons for chatter may include, among other things, too high inlet pressure loss, inadmissible back pressure, or operation in partial load ranges.

Flutter: “Abnormal rapid reciprocating motion of the movable parts of a pressure relief valve in which the disc does not contact the seat.” The causes of flutter with small and difficult to measure amplitudes are vibrations coming from external sources. Possible external sources are piston compressors or pumps. The vibration can be transferred to the safety valve mechanically via the connections or through the medium.

Based on extensive experience with safety valves, LESER developed the o-ring damper on its certified test benches. The o-ring damper prevents the vibration of moving parts or reduces them to a non-critical frequency and amplitude. Nevertheless, the safety valve operates within the limits of the rules and regulations and standards. Through a special design, the o-ring damper can be used for any type of vibrations.

LESER offers the o-ring damper integrated in the cap H2 and as a modified lifting device H4. For applications with friction-reducing media, e.g. oil, a balanced bellows design is provided to protect the o-ring damper against the medium.

Available design
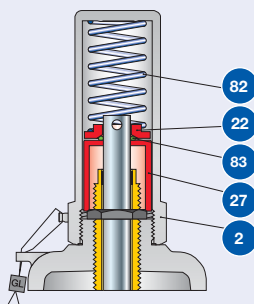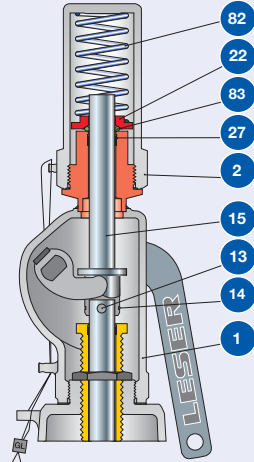
| | | Cap H2 | Packed lever H4 |
|---------------------------------|-------------------------|---|---|
| Design | |  |  |
| Option code | Conventional design | J65 | J66 |
| | Balanced bellows design | J65, J78 | J66, J78 |
| O-ring temperature range | | -20 °C to +180 °C | |

O-ring damper – subassembly item 40

| Availability | | Cap H2 and Packed lever H4 | |
|----------------------------------|--|-----------------------------------|--|
| Valve size | | Pressure range | |
| Series 433 | | | |
| DN 15 1/2" | | 0.5 – 40 bar 7.25 – 580 psig | |
| DN 20 – DN 50 3/4" – 2" | | 0.5 – 40 bar 7.25 – 580 psig | |
| DN 65 – DN 80 2 1/2" – 3" | | 0.5 – 35 bar 7.25 – 508psig | |
| DN 100 4" | | 0.5 – 30 bar 7.25 – 435 psig | |
| DN 15 PN 160 O-ring disc 1/2" | | 11.3 – 103 bar 164 – 1494 psig | |
| DN 15 PN 160 steel disc 1/2" | | 9.01 – 100 bar 131 – 1450 psig | |
| Series 429 | | | |
| DN 15 – DN 50 1/2" – 2" | | 0.5 – 40 bar 7.25 – 580 psig | |
| DN 65 – DN 80 2 1/2" – 3" | | 0.5 – 35 bar 7.25 – 508 psig | |
| DN 100 4" | | 0.5 – 30 bar 7.25 – 435 psig | |

LESER guarantees perfect operation of the o-ring damper through extensive testing on the certified test benches. If an o-ring damper is needed for a pressure level that is not given in the table, then further tests are necessary. This leads to longer delivery times. Please contact sales@leser.com.

| Materials | | Cap H2 | | Packed lever H4 | |
|-----------|-----------------|-----------------|--|-----------------|--|
| Item. | Component | | | | |
| 1 | Lever cover | – | | 1.4408 | |
| | | – | | CF8M | |
| 2 | Cap H2 | 1.4404 | | 1.4404 | |
| | | 316L | | 316L | |
| 13 | Cylindrical pin | – | | 1.4401 | |
| | | – | | B8M | |
| 14 | Securing ring | – | | 1.4571 | |
| | | – | | 316Ti | |
| 15 | Spindle | – | | 1.4404 | |
| | | – | | 316L | |
| 22 | Clamping ring | 1.4404 | | 1.4404 | |
| | | 316L | | 316L | |
| 27 | Bush | 1.4404 | | – | |
| | | 316L | | – | |
| 27 | Nozzle | – | | PFTE 15% Glass | |
| | | – | | PFTE 15% Glass | |
| 82 | Spring | 1.4310 | | 1.4310 | |
| | | Stainless steel | | Stainless steel | |
| 83 | O-Ring | FKM | | FKM | |
| | | FKM | | FKM | |

| O-ring damper | Conversion kit |
|--------------------------------|----------------|
| see respective main parts list | |

Elastomer bellows

Application

Bellows seal the spring chamber to the blow-off chamber. That way, they protect the guides, moving parts, and the spring against media-related affects such as dirt, corrosion, and impurities. The elastomer bellows provides a cost-effective alternative to the balanced bellows.

The range of applications for the elastomer bellows is limited by:

- Chemical resistance
- Medium temperature
- Set pressure
- Back pressure

| Elastomer bellows | |
|---------------------|---|
| Design | |
| Construction | Easy, compact, and single-ply construction facilitates installation in small blow-off chambers. The one-piece design also facilitates easy replacement and extends the service life. |
| Flexibility | The special shape of the elastomer bellows provides good spindle mobility and prevents wear and tear. |
| Inspection hole | To check the effectiveness of the bellows, an inspection hole (Ø 10 mm) is put into the bonnet. This makes it possible to check the seal tightness of the bellows. In the event of a fault in the bellows, the medium leaks from this hole. |
| Construction height | No change |

| Materials | | Valve size | DN 20 – 100 | DN 20 – 150 |
|-------------|-------------------|------------|------------------------|-------------|
| Option code | | J79 | J87 (DN 100 J87 + S70) | |
| Item | Component | | | |
| 70 | Elastomer bellows | | 70 EPDM 281 | 45 NBR 670 |
| | | | 70 EPDM 281 | 45 NBR 670 |
| 71 | Hose clamp | | 1.4301 | 1.4301 |
| | | | 304 | 304 |
| 72 | Hose clamp | | 1.4301 | 1.4301 |
| | | | 304 | 304 |

| Operating conditions | | | |
|----------------------|--------------------------|-------------|-------------|
| Temperature ranges | [°C] | -50 to +130 | -25 to +100 |
| Set pressure | max. [bar _g] | 10 | |
| Built-up | [bar _g] | up to 3 | |

Lift indicator


The lift indicator is used in the process technology to monitor the operating condition of a safety valve.

Depending on the type of valve, LESER equips the packed lever H4 or the bonnets with the receptacle for the lift indicator.

For safety valves with lift indicators, the opening of the valve during opening or the lifting operation is signalled as of a specific lift (min. 1mm).

LESER uses inductive DC lift indicators with two-wire technology Type DIN EN 60947-5-6 (NAMUR). The indicators are approved for use in explosion-prone areas of Zone 0 (Ex II 1 D Ex iaD 20 T6). Other indicators that meet customer specifications can be used.

Technical data for lift indicators can be found on the manufacturer's homepage:
www.pepperl-fuchs.com

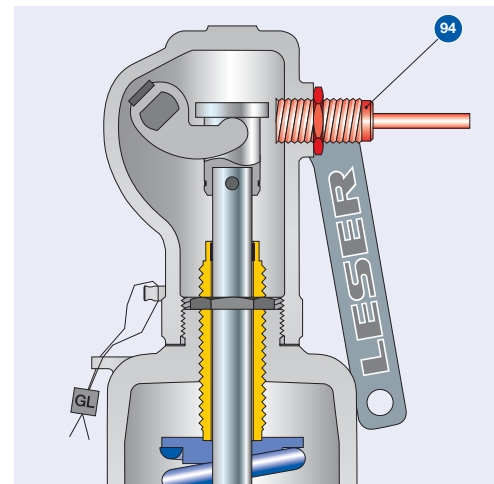

Packed lever H4

Gas-tight construction on request

For installation instructions for lift indicators, see LWN 323.02-E.

Availability

| Item. | Name | Option code |
|-------|---|-------------|
| 40 | Packed lever H4 with receptacle for lift indicator M18 x 1 [mm] | J39 |
| 94 | Lift indicator M18 x 1, used type = PEPPERL+FUCHS NJ5-18GK-N | J93 |


Functional diagram

A, closed

For a closed valve, the lift indicator is positioned on the side, in front of the coupling or the control sleeve.

B, open

If the safety valve opens or if the safety valve is vented **(in both cases, min. 1 mm)** the lift indicator changes its state and switches. If the lift indicator unscrews, e.g. due to vibrations, there is also a switching operation.


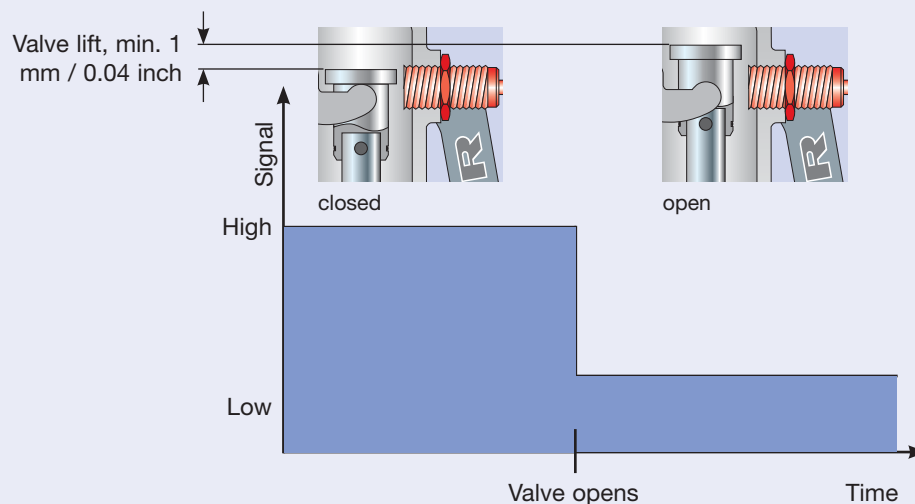


Lift restriction


The Lift restriction is used to adjust the safety valve to the required discharge mass flow and does not affect the operation of the safety valve.

A lift stopper must meet the requirements of the following codes and standards.

| Requirements | | | |
|--|---|--|--|
| Code / Standards | EN ISO 4126-1, Section 5.1.3 | ASME Code case 1945-4 | AD 2000-Merkblatt A2, Section 10.3 |
| Lift | ≥ 30% of the full lift not less than 1.0 mm | ≥ 30% of the full lift not less than 2.0 mm | not less than 1.0 mm |
| Coefficient of discharge | - | - | $\alpha_w [S/G] \geq 0.08$ |
| | - | - | $\alpha_w [L] \geq 0.05$ |
| Name plate marking | Identification of the reduced coefficient of discharge | - Capacity replaced by "Limited capacity" - Limited lift = ___ mm | Identification of the reduced coefficient of discharge |
| Design according to EN ISO 4126-1 | For valves with a lift stopper to adapt to the required discharge mass flow, this device must not have an adverse effect on the operation of the valve. If it is adjustable, the lift stopper device must be setup such that the adjustable part can be mechanically secured and sealed. The lift stopper device must be installed and sealed by the manufacturer. | | |
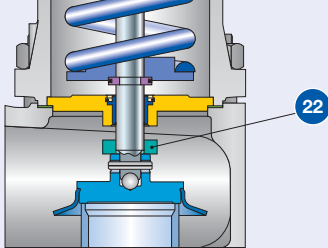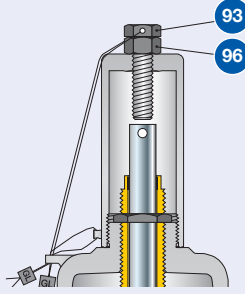
| Lift restriction | | Lift restriction by bush | Lift restriction by gag |
|---------------------|------------------|---|---|
| Design | |  |  |
| Option code | | J51 | Cap H2: J52 Packed lever H4: J50 |
| Availability | | | |
| Series 433 | | ✓ | ✓ |
| Series 429 | | - | - |
| Materials | | | |
| Item. | Component | | |
| 22 | Bush | 1.4404 | - |
| | | 316L | - |
| 93 | Stud | - | 1.4401 |
| | | - | B8M |
| 96 | Nut | - | 1.4401 |
| | | - | 8M |

LESER worldwide

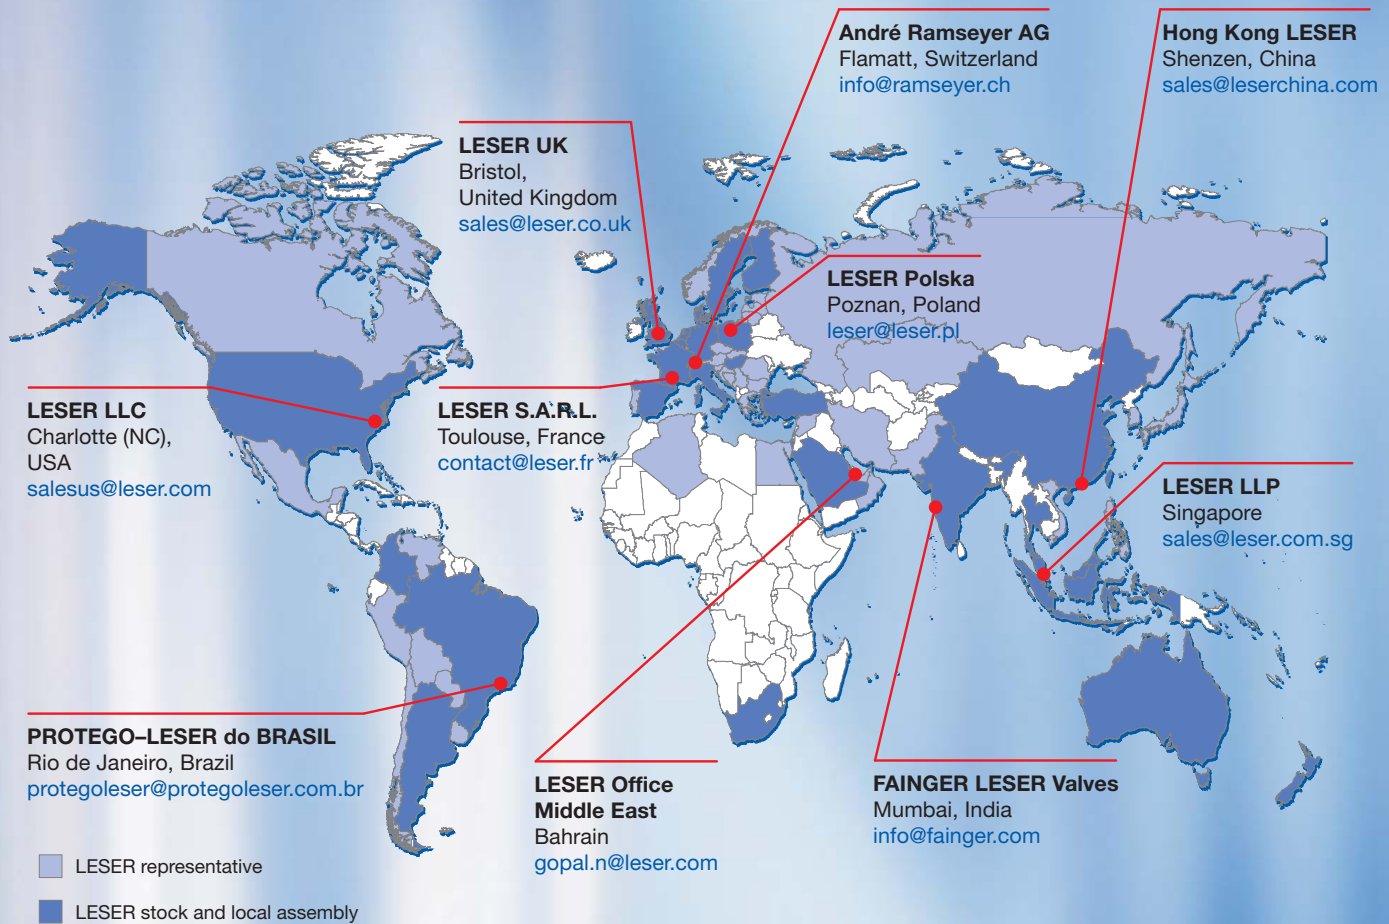

Modulate Action
Edition January 2011 / 2000

LWN 485.01-E / 0777.5646

LESER

The-Safety-Valve.com

LESER GmbH & Co. KG

20537 Hamburg, Wendenstr. 133-135
20506 Hamburg, P.O. Box 26 16 51

Fon +49 (40) 251 65-100
Fax +49 (40) 251 65-500

Email: sales@leser.com
www.leser.com