

C4SX

SAFETY EXTENSION MODULE

- Extension of the number of safety contacts
- Non overlapping, linked contacts of A class
- 4 lines NO + 1 line NC 8A/250V + 1 test line
- Plug-in terminals
- Power supply : 24Vac/dc or 85~265Vac

8A/250V
8A/50Vdc

Cat. 4
thanks to
cyclical tests


COPPER PLUG-IN
TERMINALS



SAFETY CATEGORY


EC4SX : category 4 according to EN 954-1 associated with a safety module

WIRING DIAGRAM

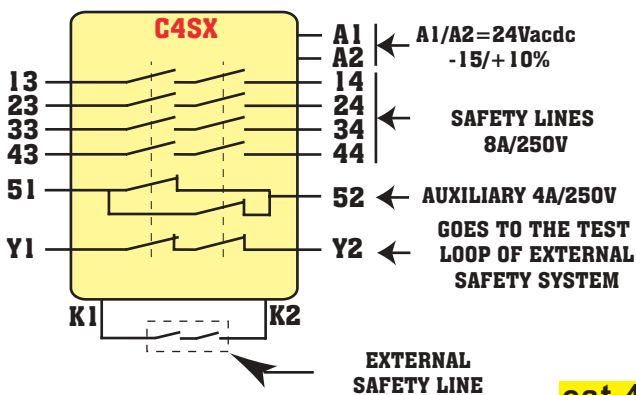

Associated to a safety module (ex. AWAX26XXL), it enables to increase the number of safety lines while maintaining the safety category.

DIMENSIONS

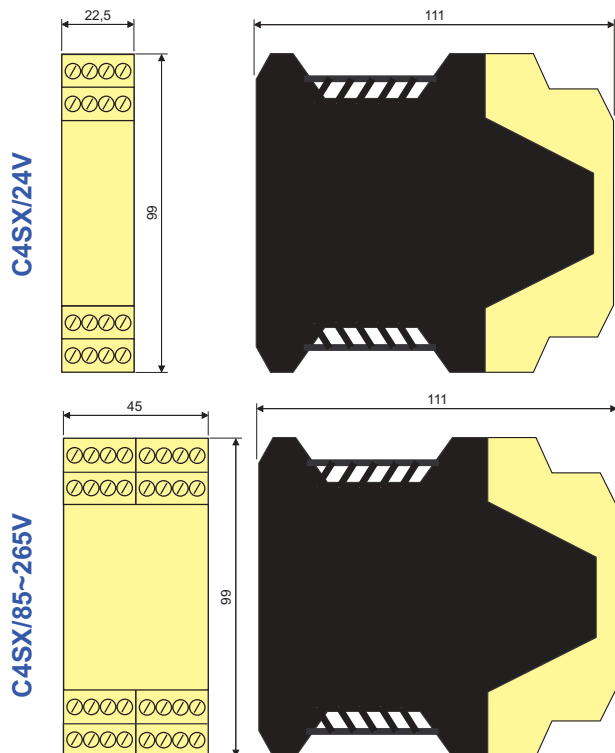

FUNCTIONING

The activation is done by the closing of a NO line (K1/K2) coming from a safety device.

APPLICATION

Six additional safety lines 8A/250V in a 22,5 mm housing only. The safety category 4 of the safety module is maintained. Example : Awax26XXL+C4SX->cat.4 according to EN954-1.